



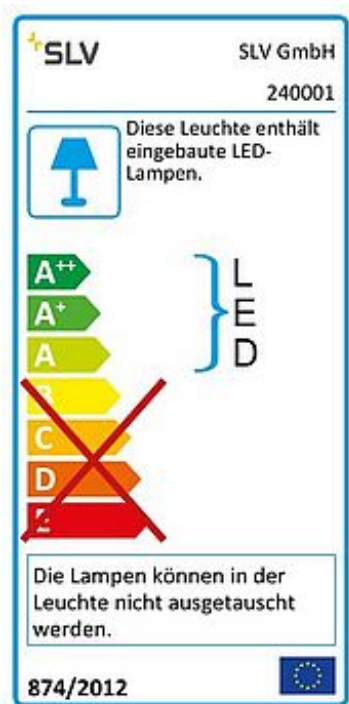

P-LIGHT 27 PL

pendant, emergency exit light, LED, 6000K, white, L/W/H 26.5/4.5/21 cm, 3,5W

Article number	240001
Product family	P-Light
Feed-in capability	No
Lamp included	No
Width	26.5 cm
Height	21 cm
Depth	4.5 cm
Pendant length	100 cm
Net weight	0.874 kg
Gross weight	1.051 kg
Voltage	220-240V ~50Hz
Protection class	II
Average lifespan	25000 Hours
Colour temperature	6000 Kelvin
Colour rendering index	> 70
Luminous flux	32 lm
Energy efficiency class	A++
Catalogue page	BIG WHITE 2018: 854
Colour	white
Form	square
Material	ABS/plastic PC
Way of mounting	Surface mounted / Ceiling mounted / Wall mounted

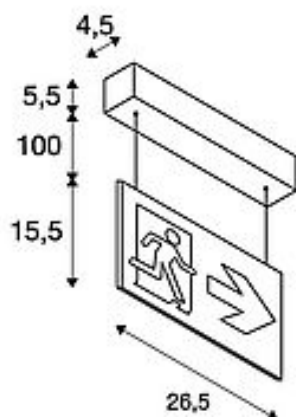

Articles of this series

240000	P-LIGHT 27, wall and ceiling light, emergency exit light, LED, 6000K, white, L/W/H 26.5/4.5/21 cm, 3,5W
240002	P-LIGHT 33, wall and ceiling light, emergency exit light, LED, 6000K, white, L/W/H 33/6/25 cm, 4W
240006	P-LIGHT, recessed fitting, LED, 6000K, round, white, 5W
240004	P-LIGHT, ceiling light, LED, 6000K, IP65, rectangular, white, 6,5W
240005	P-LIGHT, ceiling light, double-headed, LED, 6000K, oval, white, 6,5W
240003	P-LIGHT 33 PL, pendant, emergency exit light, LED, 6000K, white, L/W/H 33/6/25 cm, 4W
240007	PICTOGRAM FOILS, for P-LIGHT emergency exit light, set of 4, diagonal arrow in all directions, L/H 24/13.1 cm
240008	PICTOGRAM FOILS, for P-LIGHT emergency exit light, set of 4, diagonal arrow in all directions, L/H 30/16.1 cm
240009	PICTOGRAM FOILS, for P-LIGHT emergency exit light, set of 3, L/H 35.3/16.5 cm
240010	PICTOGRAM FOILS, for P-LIGHT emergency exit light, set of 1, L/H 35.3/16.5 cm

The P-LIGHT 27 PL emergency lighting is suitable as a pendant. The safety lights are fitted with a built-in Ni-MH battery with an automatic self-test. The detection range is 24 m. The emergency operating time of the luminaires is three hours. The luminaires can be operated permanently switched on / stand-by operation. The luminaire is connected directly to the 230V mains supply. Other variants of the P-LIGHT series are available. The luminaire is supplied with three signs with different arrow directions (right / left / down). As an option, other signs are available.

Notes