




DIMENSIONS



AWARDS



reddot winner 2021
lighting design

Name	UP 3000K NT
Reference	A4020001NT
Color	Textured black
RAL	9005
Category	WALL & FLOOR LIGHTS

PRODUCT

Light source	LED
Gross luminous flux	4000 Lm
Power	31 W
Power values of the system	34,44 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	94°
Lighting efficiency	76%
Efficacy	129 Lm/W
Current intensity	930 mA
Dimming	ON BOARD
Driver	Included - Plug Connect
Electrical insulation class	☐
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h

LIGHTING INFORMATION


Ingress Protection	IP20
Weight	10765 g.
Packaged weight	12135 g.
Packaging dimensions	1924 × 252 × 265 mm
Units per package	1
Materials	Aluminium / Iron

OTHER DATA




Like the line that separates heaven and earth, Up marks a horizon in space. Its light, projected vertically, evokes a natural glow that penetrates the room. The luminaire bathes the ceiling plane directly, while the environment is illuminated with a comfortable indirect light.

POLAR DIAGRAM

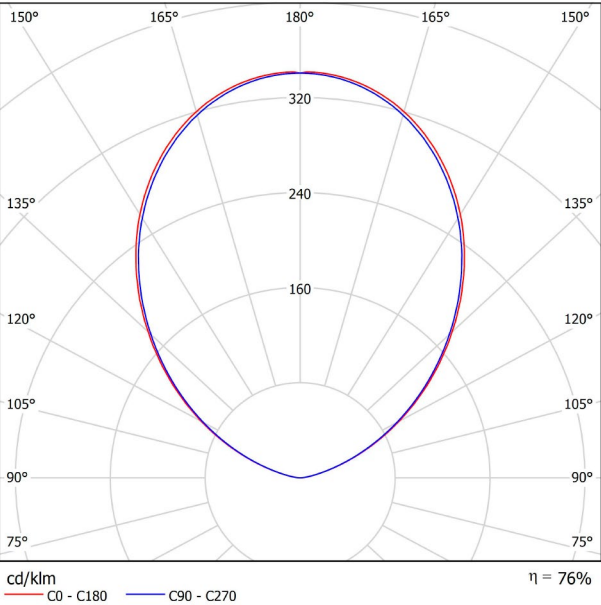


CONICAL DIAGRAM

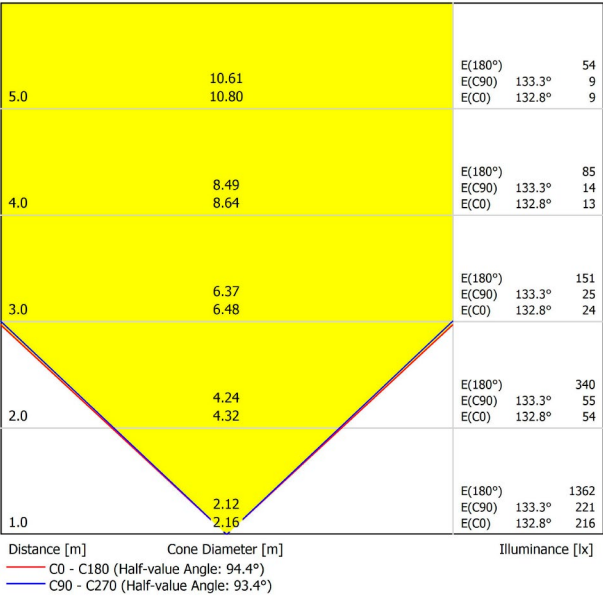



DIMENSIONS



AWARDS



PRODUCT

Name	UP 3000K WT
Reference	A4020001WT
Color	Textured white
RAL	9016
Category	WALL & FLOOR LIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	4000 Lm
Power	31 W
Power values of the system	34,44 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	94°
Lighting efficiency	76%
Efficacy	129 Lm/W
Current intensity	930 mA
Dimming	ON BOARD
Driver	Included - Plug Connect
Electrical insulation class	☐
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Weight	10765 g.
Packaged weight	12135 g.
Packaging dimensions	1924 × 252 × 265 mm
Units per package	1
Materials	Aluminium / Iron




Like the line that separates heaven and earth, Up marks a horizon in space. Its light, projected vertically, evokes a natural glow that penetrates the room. The luminaire bathes the ceiling plane directly, while the environment is illuminated with a comfortable indirect light.

POLAR DIAGRAM

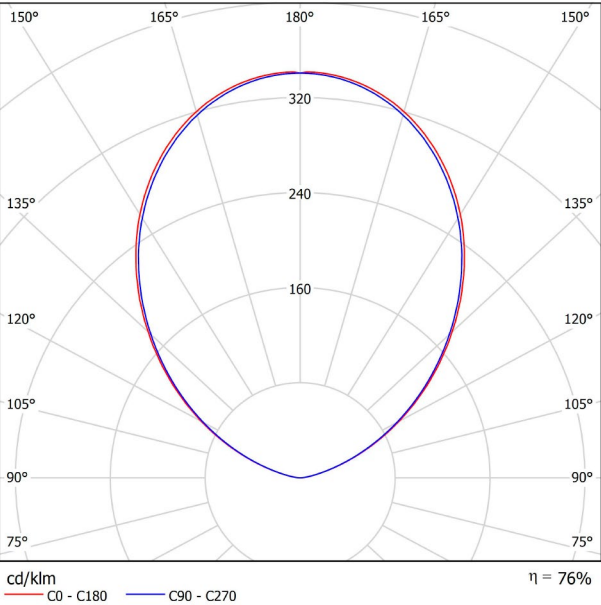


CONICAL DIAGRAM

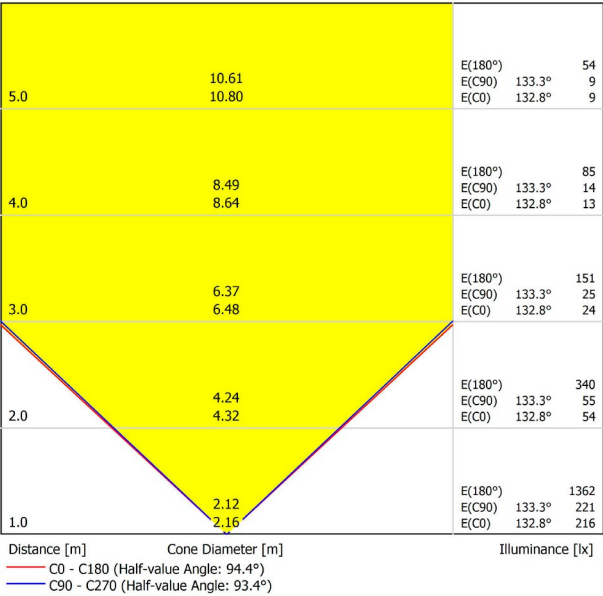



DIMENSIONS



AWARDS



PRODUCT

Name	UP 2700K NT
Reference	A4020000NT
Color	Textured black
RAL	9005
Category	WALL & FLOOR LIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3850 Lm
Power	31 W
Power values of the system	34,44 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	94°
Lighting efficiency	76%
Efficacy	124 Lm/W
Current intensity	930 mA
Dimming	ON BOARD
Driver	Included - Plug Connect
Electrical insulation class	☐
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Weight	10765 g.
Packaged weight	12135 g.
Packaging dimensions	1924 × 252 × 265 mm
Units per package	1
Materials	Aluminium / Iron




Like the line that separates heaven and earth, Up marks a horizon in space. Its light, projected vertically, evokes a natural glow that penetrates the room. The luminaire bathes the ceiling plane directly, while the environment is illuminated with a comfortable indirect light.

POLAR DIAGRAM

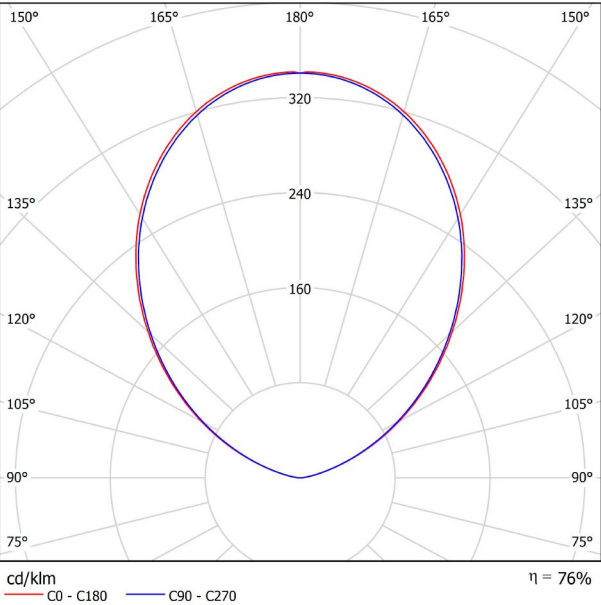


CONICAL DIAGRAM

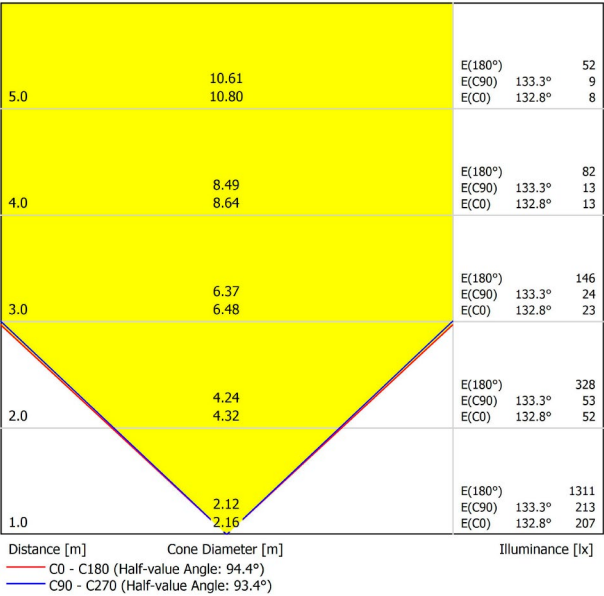



DIMENSIONS



AWARDS



reddot winner 2021
lighting design

PRODUCT

Name	UP 2700K WT
Reference	A4020000WT
Color	Textured white
RAL	9016
Category	WALL & FLOOR LIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3850 Lm
Power	31 W
Power values of the system	34,44 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	94°
Lighting efficiency	76%
Efficacy	124 Lm/W
Current intensity	930 mA
Dimming	ON BOARD
Driver	Included - Plug Connect
Electrical insulation class	☐
Energy efficiency	A+
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Weight	10765 g.
Packaged weight	12135 g.
Packaging dimensions	1924 × 252 × 265 mm
Units per package	1
Materials	Aluminium / Iron



Like the line that separates heaven and earth, Up marks a horizon in space. Its light, projected vertically, evokes a natural glow that penetrates the room. The luminaire bathes the ceiling plane directly, while the environment is illuminated with a comfortable indirect light.

POLAR DIAGRAM

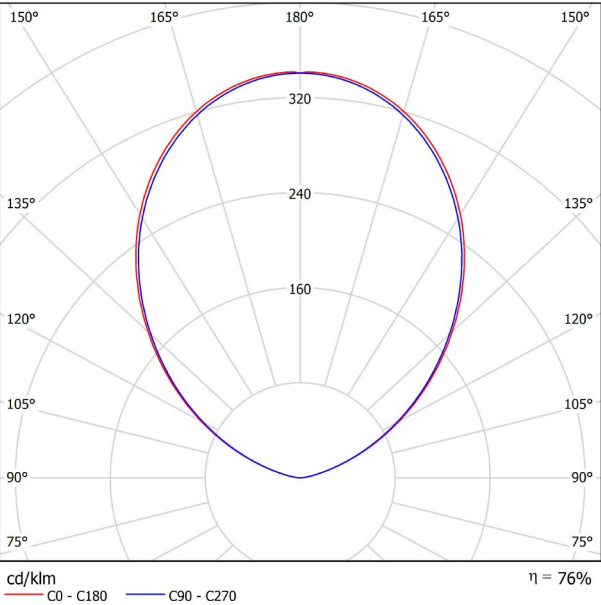

CONICAL DIAGRAM

