

# PANZERI

## BELLA

24V DC  
M05201.011.0510



Multiple suspension lighting fixture for interiors, with direct light emission.  
Die-cast aluminium structure in white, black, bronze, matt brass or titanium polyacrylic paint.  
Modelled acrylic diffuser with matt finish.  
Aluminium closing disk in polyacrylic paint.  
Suspension kit with rod in brass tube in polyacrylic paint.  
3m (118,1") long suspension and power cable in transparent PVC.  
Provided without power canopy, complete with cable clamp on the cable's free extremity.

### Data sheet


CODE	M05201.011.0510
SYSTEM POWER CONSUMPTION	4,5W
EFFICACY	97lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	24V DC
FREQUENCY	
ELECTRICAL CONFIGURATION	
DRIVER	Remote Not Included
NOMINAL LUMINOUS FLUX	460lm
LUMEN OUTPUT	388lm
EFFICIENCY	84.348%
WEIGHT	0,2200Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	13 x 24 x 12

### Finish

White



Technical drawing

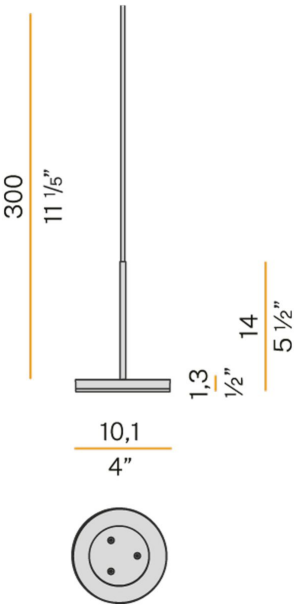

Accessories / fixing

XM8901-03 LED

Canopy for power supply and suspension up to 3 24V DC constant voltage models maximum.




XM8901-05 LED

Canopy for power supply and suspension up to 5 24V DC constant voltage models maximum.




XM8901-06 LED

Canopy for power supply and suspension up to 6 24V DC constant voltage models maximum.

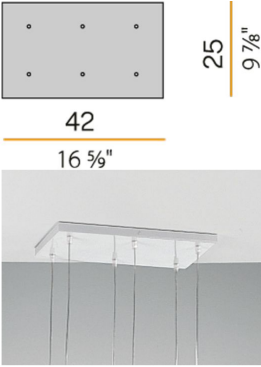

XM9201-01

Recessed canopy for power supply.

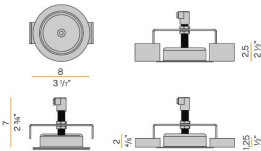

# PANZERI

## BELLA

220-240V AC ON-OFF  
L05301.011.0501



Suspension lighting fixture for interiors, with indirect light emission.  
Die-cast aluminium structure in white, black, bronze, matt brass or titanium polyacrylic paint.  
Modelled acrylic diffuser with matt finish.  
Pickled sheet metal closing disk in polyacrylic paint.  
Suspension kit with rod in brass tube in polyacrylic paint.  
3m (118,1") long suspension and power cable in transparent PVC.  
Power canopy with pickled sheet metal ceiling bracket and extruded aluminium covering in white, black, bronze, matt brass or titanium polyacrylic paint.

### Data sheet


CODE	L05301.011.0501
SYSTEM POWER CONSUMPTION	6,5W
EFFICACY	64.67lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	460lm
LUMEN OUTPUT	388lm
EFFICIENCY	84.348%
WEIGHT	0,5450Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	13 x 24 x 12

### Finish

White



Technical drawing

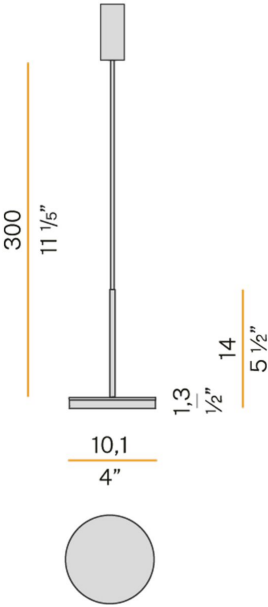

Accessories / structure