


PANZERI

APP

220-240V AC ON-OFF
A09801.002.0406

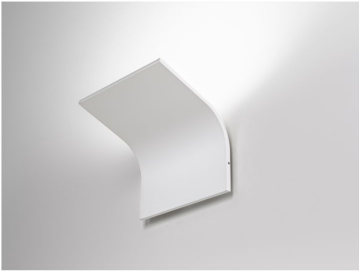

Wall lighting fixture for interiors, with indirect light emission.
Die-cast aluminium wall bracket in polyacrylic paint.
Extruded aluminium structure in white, matt brass or titanium polyacrylic paint.

Data sheet


CODE	A09801.002.0406
SYSTEM POWER CONSUMPTION	36W
EFFICACY	79.5lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	2862lm
LUMEN OUTPUT	2862lm
EFFICIENCY	100%
WEIGHT	2,0250Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	28 x 37 x 16

Finish

White




Technical drawing

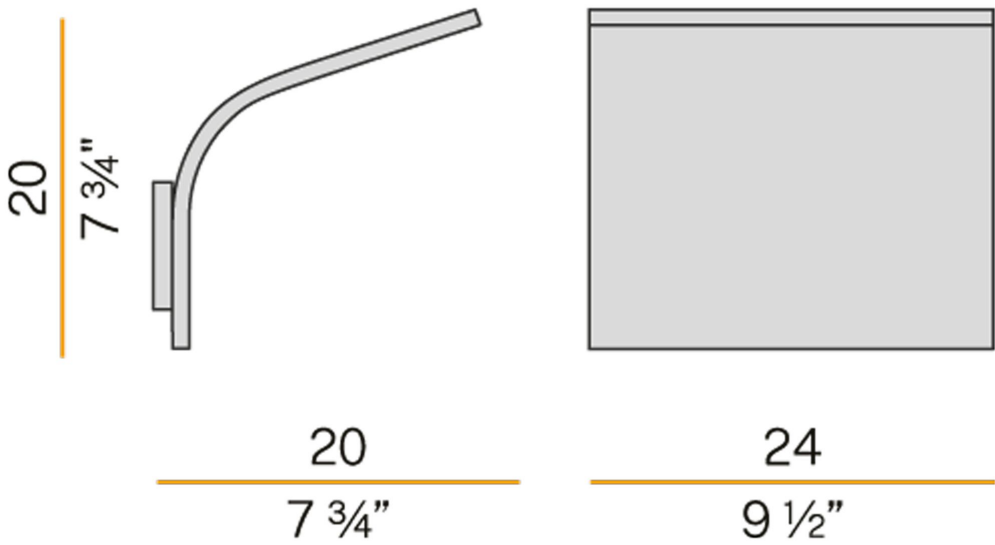

Accessories / source

XM14/230

Dimmable device for 230V LED modules, 5÷100W.

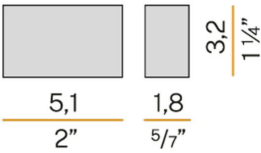

PANZERI

APP

220-240V AC ON-OFF
A09801.001.0406

Wall lighting fixture for interiors, with indirect light emission.
Die-cast aluminium wall bracket in polyacrylic paint.
Extruded aluminium structure in white, matt brass or titanium polyacrylic paint.



Data sheet

CODE	A09801.001.0406
SYSTEM POWER CONSUMPTION	18W
EFFICACY	79.5lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	1431lm
LUMEN OUTPUT	1431lm
EFFICIENCY	100%
WEIGHT	0,9920Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	16 x 30 x 14




Finish

White




Technical drawing

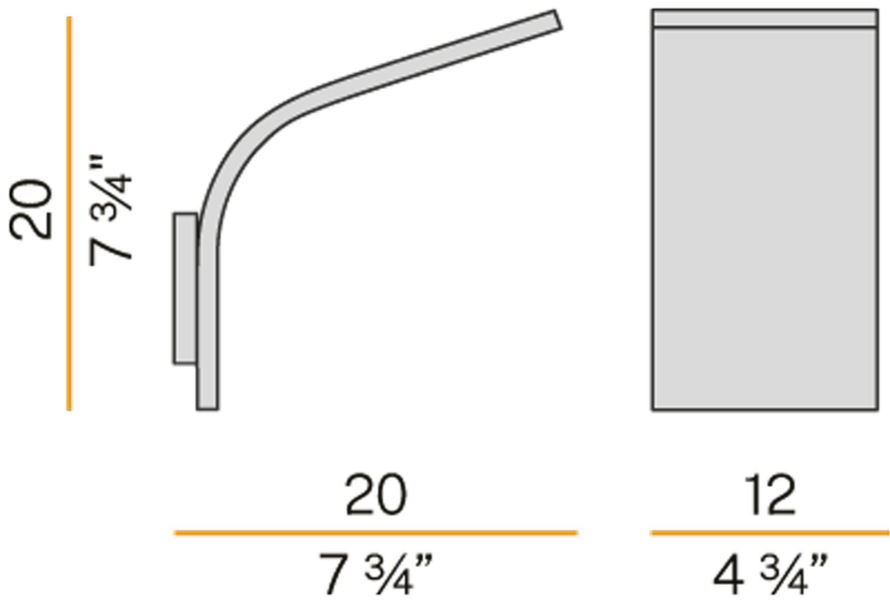

Accessories / source

XM14/230

Dimmable device for 230V LED modules, 5÷100W.

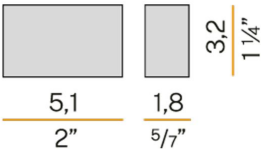

XM14/230

Dimmable device for 230V LED modules, 5÷100W.

