
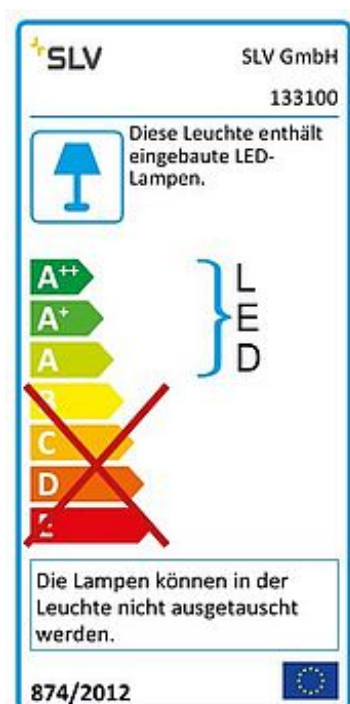


SUPROS

pendant, LED, 3000K, round, black, 3000lm, 60° reflector

Article number	133100
Product family	Supros 3000
Feed-in capability	No
Lamp included	No
Pendant length	200 cm
Net weight	1.629 kg
Gross weight	1.798 kg
Voltage	220-240V ~50/60Hz sec. 750mA
Protection class	I
Beam angle	60 Degree
Average lifespan	50000 Hours
Colour temperature	3000 Kelvin
Colour rendering index	> 80
Luminous flux	2600 lm
Energy efficiency class	A++
Light distribution type 1	direct
Light distribution type 2	rotationally symmetric
Catalogue page	BIG WHITE 2018: 185
Colour	black
Form	cylindric
Material	Aluminium
Way of mounting	Surface mounted / Ceiling mounted

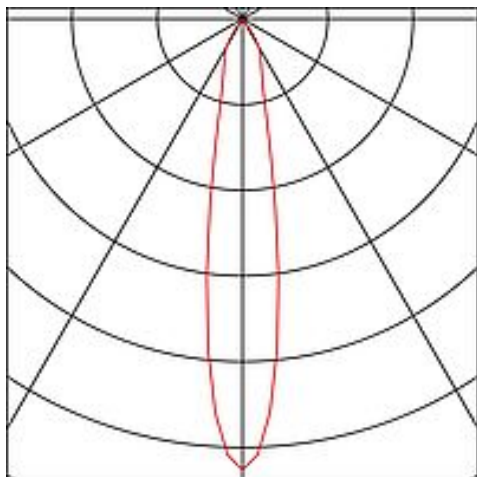



Articles of this series

133101	SUPROS, pendant, LED, 3000K, round, white, 3000lm, 60° reflector
114110	SUPROS, recessed fitting, LED, 3000K, round, black, 3000lm, 60° reflector, incl. clip springs
114111	SUPROS, recessed fitting, LED, 3000K, round, white, 3000lm, 60° reflector, incl. clip springs
114120	SUPROS, recessed fitting, LED, 3000K, round, black, 3000lm, 60° reflector, incl. clip springs
114121	SUPROS, recessed fitting, LED, 3000K, round, white, 3000lm, 60° reflector, incl. clip springs
114130	SUPROS, ceiling light, LED, 3000K, round, black, 2100lm, 60° reflector, incl. clip springs
114131	SUPROS, ceiling light, LED, 3000K, round, white, 2100lm, 60° reflector, incl. clip springs
152620	TRACKSPOT, spot for 240V 3-phase track, LED, 3000K, black, 60° reflector, incl. 3-phase adapter
152621	SUPROS, spot for 240V 3-phase track, LED, 3000K, white, 60° reflector, incl. 3-phase adapter
114140	SUPROS, wall light, LED, 3000K, round, black, 60° reflector, 2x15,2W
114141	SUPROS, wall light, LED, 3000K, round, white, 60° reflector, 2x15,2W
114160	SUPROS, recessed fitting, LED, 4000K, round, black, 3000lm, 60° reflector, 28W
114161	SUPROS, recessed fitting, LED, 4000K, round, white, 3000lm, 60° reflector, 28W
114170	SUPROS, recessed fitting, LED, 4000K, round, black, 3000lm, 60° reflector, 28W
114171	SUPROS, recessed fitting, LED, 4000K, round, black, 3000lm, 60° reflector, 28W
114180	SUPROS, ceiling light, LED, 4000K, round, black, 2100lm, 60° reflector, 28W
114181	SUPROS, ceiling light, LED, 4000K, round, white, 2100lm, 60° reflector, 28W
114190	SUPROS, wall light, LED, 4000K, round, black, 60° reflector, 2x15,2W

114191	SUPROS, wall light, LED, 4000K, round, white, 60° reflector, 2x15,2W
133110	SUPROS, pendant, LED, 4000K, round, black, 3000lm, 60° reflector, 28W
133111	SUPROS, pendant, LED, 4000K, round, white, 3000lm, 60° reflector, 28W
152680	SUPROS, spot for 240V 3-phase track, LED, 4000K, black, 60° reflector, 28W, incl. 3-phase adapter
152681	SUPROS, spot for 240V 3-phase track, LED, 4000K, white, 60° reflector, 28W, incl. 3-phase adapter

The SUPROS light series impresses with its multitude of possible applications, excellent LED technology and its harmonious design. With its very high luminous flux, the SUPROS product family is ideally suited to replace power-hungry, conventional lighting installations. The wide-area reflector included in the delivers can be replaced by reflectors with narrower beam angles which are optionally available. This can be done without the need for tools. With the factory-installed LED driver, all the luminaires in the series are suitable for direct connection to the 230V mains supply.

Notes

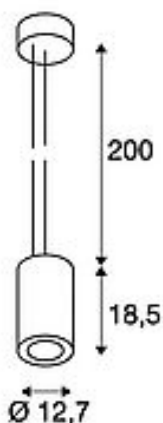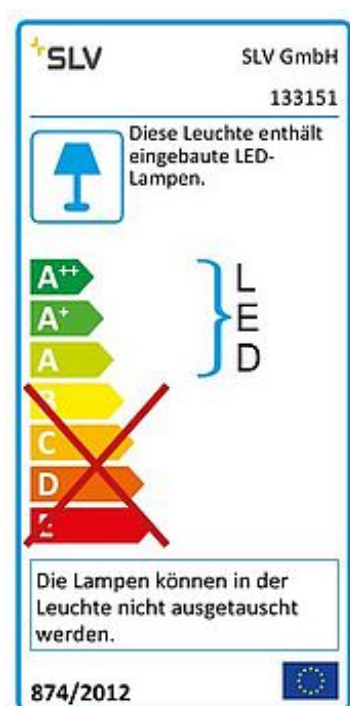

SUPROS

pendant, LED, 4000K, round, white, 3150lm, 60° reflector, 33.5W

Article number	133151
Product family	Supros 4000
Feed-in capability	No
Lamp included	No
Height	18.5 cm
Diameter	12.7 cm
Pendant length	200 cm
Net weight	1.626 kg
Gross weight	1.74 kg
Voltage	220-240V ~50/60Hz sec. 950mA
Protection class	I
Beam angle	60 Degree
Average lifespan	50000 Hours
Colour temperature	4000 Kelvin
Colour rendering index	> 80
Luminous flux	3300 lm
Energy efficiency class	A++
Catalogue page	BIG WHITE 2018: 185
Light distribution type 1	direct
Light distribution type 2	rotationally symmetric
Colour	white
Form	round
Material	Aluminium/glass
Way of mounting	Surface mounted / Ceiling mounted


Articles of this series

118110	SUPROS, recessed fitting, LED, 3000K, round, black, 4000lm, 60° reflector, 33.5W
118111	SUPROS, recessed fitting, LED, 3000K, round, white, 4000lm, 60° reflector, 33.5W
118120	SUPROS, recessed fitting, LED, 3000K, round, tiltable, black, 4000lm, 60° reflector, 33.5W
118121	SUPROS, recessed fitting, LED, 3000K, round, tiltable, white, 4000lm, 60° reflector, 33.5W
118130	SUPROS, ceiling light, LED, 3000K, round, black, 3100lm, 60° reflector, 33.5W
118131	SUPROS, ceiling light, LED, 3000K, round, white, 3100lm, 60° reflector, 33.5W
118160	SUPROS, recessed fitting, LED, 4000K, round, black, 4000lm, 60° reflector, 33.5W
118161	SUPROS, recessed fitting, LED, 4000K, round, white, 3100lm, 60° reflector, 33.5W
118170	SUPROS, recessed fitting, LED, 4000K, round, tiltable, black, 3100lm, 60° reflector, 33.5W
118171	SUPROS, recessed fitting, LED, 4000K, round, tiltable, white, 4000lm, 60° reflector, 33.5W
118180	SUPROS, ceiling light, LED, 4000K, round, black, 3100lm, 60° reflector, 33.5W
118181	SUPROS, ceiling light, LED, 4000K, round, white, 3100lm, 60° reflector, 33.5W
133140	SUPROS, pendant, LED, 3000K, round, black, 3150lm, 60° reflector, 33.5W
133141	SUPROS, pendant, LED, 3000K, round, white, 3150lm, 60° reflector, 33.5W
133150	SUPROS, pendant, LED, 4000K, round, black, 3150lm, 60° reflector, 33.5W
152800	SUPROS, spot for 240V 3-phase track, LED, 3000K, black, 60° reflector, 33.5W, incl. 3-phase adapter
152801	SUPROS, spot for 240V 3-phase track, LED, 3000K, white, 60° reflector, 33.5W, incl. 3-phase adapter
152810	SUPROS, spot for 240V 3-phase track, LED, 4000K, black, 60° reflector, 33.5W, incl. 3-phase adapter

152811 SUPROS, spot for 240V 3-phase track, LED, 4000K, white,
60° reflector, 33.5W, incl. 3-phase adapter

The SUPROS light series impresses with its multitude of possible applications, excellent LED technology and its harmonious design. With its very high luminous flux, the SUPROS product family is ideally suited to replace power-hungry, conventional lighting installations. The wide-area reflector included in the delivers can be replaced by reflectors with narrower beam angles which are optionally available. This can be done without the need for tools. With the factory-installed LED driver, all the luminaires in the series are suitable for direct connection to the 230V mains supply.


Notes

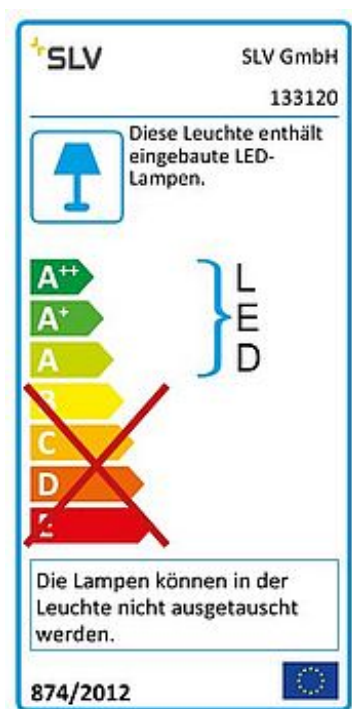

SUPROS 78

pendant, LED, 3000K, round, black, 60° lens, 9W

Article number	133120
Product family	Supros Mini 750
Feed-in capability	No
Lamp included	Yes
Height	18.2 cm
Diameter	7.8 cm
Pendant length	150 cm
Net weight	0.776 kg
Gross weight	0.857 kg
Voltage	220-240V ~50/60Hz sec. 250mA
Protection class	I
Beam angle	60 Degree
Average lifespan	25000 Hours
Colour temperature	3000 Kelvin
Colour rendering index	> 80
Luminous flux	700 lm
Energy efficiency class	A++
Catalogue page	BIG WHITE 2018: 185
Light distribution type 1	direct
Light distribution type 2	rotationally symmetric
Colour	black
Form	cylindric
Material	Aluminium
Way of mounting	Surface mounted / Ceiling mounted

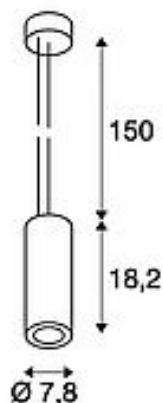

Articles of this series

116310	SUPROS 78, recessed fitting, LED, 3000K, round, black, 60° lens, 9W
116311	SUPROS 78, recessed fitting, LED, 3000K, round, white, 60° lens, 9W
116320	SUPROS 78, recessed fitting, LED, 3000K, round, tiltable, black, 60° lens, 9W
116321	SUPROS 78, recessed fitting, LED, 3000K, round, tiltable, white, 60° lens, 9W
116340	SUPROS 78, wall light, LED, 3000K, round, black, 60° lens, 9W
116341	SUPROS 78, wall light, LED, 3000K, round, white, 60° lens, 9W
133121	SUPROS 78, pendant, LED, 3000K, round, white, 60° lens, 9W
152660	SUPROS 78, spot for 240V 3-phase tracks, LED, 3000K, round, black, 60° lens, 9W, incl. 3-phase adapter
152661	SUPROS 78, spot for 240V 3-phase tracks, LED, 3000K, round, white, 60° lens, 9W, incl. 3-phase adapter
116330	SUPROS 78, ceiling light, LED, 3000K, round, black, 60° lens
116331	SUPROS 78, ceiling light, LED, 3000K, round, white, 60° lens

The SUPROS light series impresses with its multitude of possible applications, excellent LED technology and its harmonious design. With its very high luminous flux, the SUPROS product family is ideally suited to replace power-hungry, conventional lighting installations. The wide-area reflector included in the delivers can be replaced by reflectors with narrower beam angles which are optionally available. This can be done without the need for tools. With the factory-installed LED driver, all the luminaires in the series are suitable for direct connection to the 230V mains supply.

Notes