

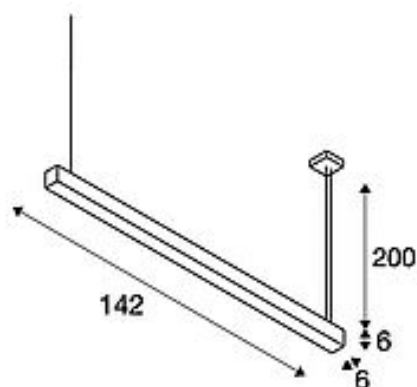


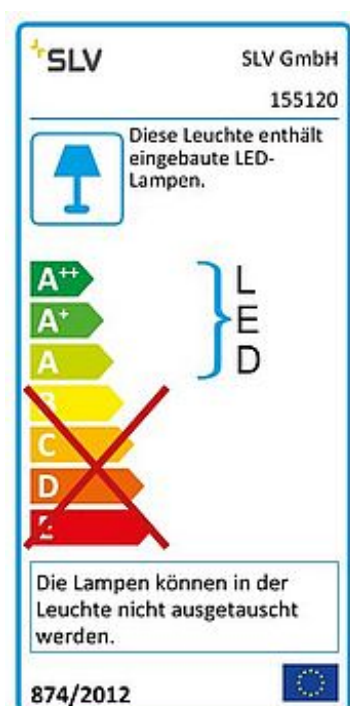

Q-LINE

pendant, single-headed, LED, 3000K, black, 2x18,2W and 1x7,5W

Article number	155120
Product family	Q-Line
Feed-in capability	No
Lamp included	No
Length	142 cm
Width	6 cm
Height	6 cm
Pendant length	200 cm
Net weight	3.163 kg
Gross weight	3.831 kg
Voltage	220-240V ~50/60Hz sec. 250mA
Protection class	I
Beam angle	120 Degree
Average lifespan	30000 Hours
Colour temperature	3000 Kelvin
Colour rendering index	> 80
Luminous flux	3200 lm
Energy efficiency class	A++
Catalogue page	BIG WHITE 2018: 157
Light distribution type 1	direct
Light distribution type 2	symetrically
Colour	black
Form	square
Material	Aluminium/acrylic glass
Way of mounting	Surface mounted / Ceiling mounted

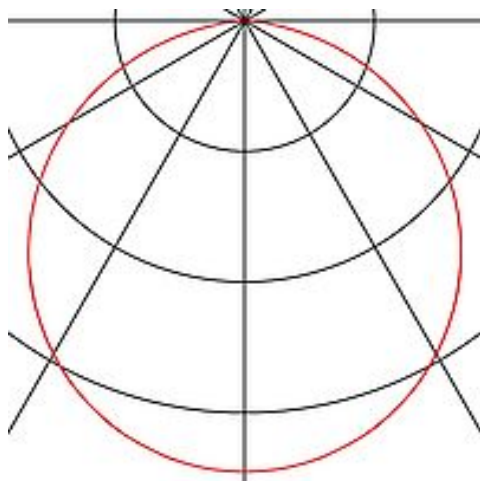

Articles of this series

155001	Q-LINE WALL, wall light, T16, white/chrome, max. 35W, incl. electronic ballast
155002	Q-LINE WALL, wall light, T16, natural aluminium/anthracite, max. 35W, incl. electronic ballast
155011	Q-LINE, pendant, single-headed, T16, white/chrome, energy saving lamp, max. 35W
155012	Q-LINE, pendant, single-headed, T16, natural aluminium/anthracite, energy saving lamp, max. 35W, incl. electronic ballast
155021	Q-LINE, pendant, double-headed, T16, white/chrome, energy saving lamp, 35W
155022	Q-LINE, pendant, double-headed, T16, natural aluminium/anthracite, energy saving lamp, 35W, incl. electronic ballast
155121	Q-LINE, pendant, single-headed, LED, 3000K, white, 2x18,2W and 1x7,5W
155124	Q-LINE, pendant, single-headed, LED, 3000K, silver, 2x18,2W and 1x7,5W
155130	Q-LINE DALI, pendant, single-headed, LED, 3000K, black, dimmable, 2x18,2W and 1x7,5W
155131	Q-LINE DALI, pendant, single-headed, LED, 3000K, white, dimmable, 2x18,2W and 1x7,5W
155134	Q-LINE DALI, pendant, single-headed, LED, 3000K, silver, dimmable, 2x18,2W and 1x7,5W

The Q-LINE wall light is available with a choice of a white, black, or silver-grey luminaire housing. A diffuser made of acrylic glass found underneath provides glare-free lighting properties. The integrated warm-white LEDs give an output of 3200 lm. Due to the integrated LED driver, the luminaire can be directly connected to the 230V mains supply.

Notes