
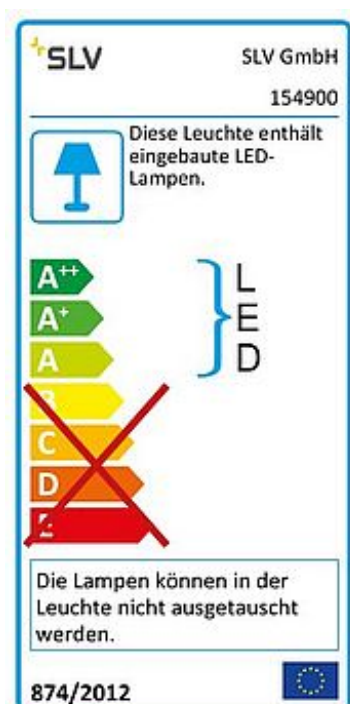


## LYNAH

pendant, double-headed, LED, 3000K, rectangular, matt black, 20W

|                           |                                   |
|---------------------------|-----------------------------------|
| Article number            | 154900                            |
| Product family            | Lynah                             |
| Feed-in capability        | No                                |
| Lamp included             | No                                |
| Length                    | 45 cm                             |
| Width                     | 16 cm                             |
| Height                    | 4 cm                              |
| Pendant length            | 150 cm                            |
| Net weight                | 2.167 kg                          |
| Gross weight              | 2.598 kg                          |
| Voltage                   | 220-240V ~50/60Hz                 |
| Protection class          | I                                 |
| Beam angle                | 14 Degree                         |
| Average lifespan          | 40000 Hours                       |
| Colour temperature        | 3000 Kelvin                       |
| Colour rendering index    | > 80                              |
| Luminous flux             | 1320 lm                           |
| Energy efficiency class   | A++                               |
| Light distribution type 1 | direct                            |
| Light distribution type 2 | rotationally symmetric            |
| Catalogue page            | AKTIONSLISTE 05.2018: 140         |
| Colour                    | matt black                        |
| Form                      | square                            |
| Material                  | Aluminium                         |
| Way of mounting           | Surface mounted / Ceiling mounted |

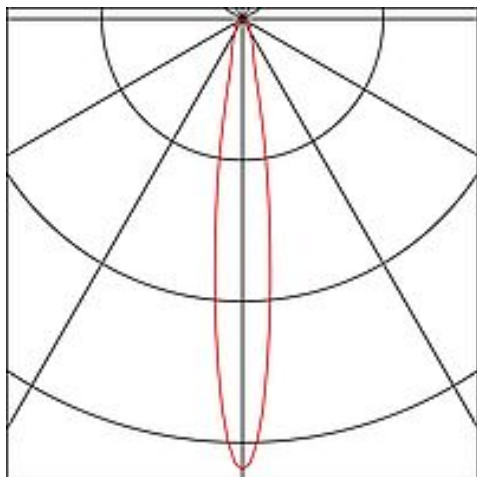

#### Articles of this series

|        |                                                                                                                   |
|--------|-------------------------------------------------------------------------------------------------------------------|
| 143770 | LYNAH spot for 240V 1-phase track, double-headed, black, 21 W, incl. 1-phase adapter                              |
| 143771 | LYNAH spot for 240V 1-phase track, double-headed, matt white, 21 W, incl. 1-phase adapter                         |
| 152580 | LYNAH, spot for 240V 3-phase track, double-headed, LED, 3000K, round, matt black, max. 20W, incl. 3-phase adapter |
| 152581 | LYNAH, spot for 240V 3-phase track, double-headed, LED, 3000K, round, matt white, max. 20W, incl. 3-phase adapter |
| 154901 | LYNAH, pendant, double-headed, LED, 3000K, rectangular, matt white, 20W                                           |
| 154910 | LYNAH, pendant, four-headed, LED, 3000K, rectangular, matt black, 40 W                                            |
| 154911 | LYNAH, pendant, four-headed, LED, 3000K, rectangular, matt white, 40 W                                            |
| 154920 | LYNAH, pendant, six-headed, LED, 3000K, rectangular, matt black, 60W                                              |
| 154921 | LYNAH, pendant, six-headed, LED, 3000K, rectangular, matt white, 60W                                              |
| 154930 | LYNAH, pendant, four-headed, LED, 3000K, square, matt black, 40W                                                  |
| 154931 | LYNAH, pendant, four-headed, LED, 3000K, square, matt white, 40W                                                  |
| 154940 | LYNAH, wall light, single-headed, LED, 3000K, matt black, max. 10W                                                |
| 154941 | LYNAH, wall light, single-headed, LED, 3000K, matt white, max. 10W                                                |

The timeless and modern design, as well as the efficiency of the LYNHAH luminaire series, available in matt black or matt white, makes it an innovative lighting option for any setting. The lamp holders are multi-directional, thus allowing the individual focus of the light beam. The luminaire is equipped with dimmable LED modules with a beam angle of 24° each, and is ready for direct connection to 230V power supply.

#### Notes

