

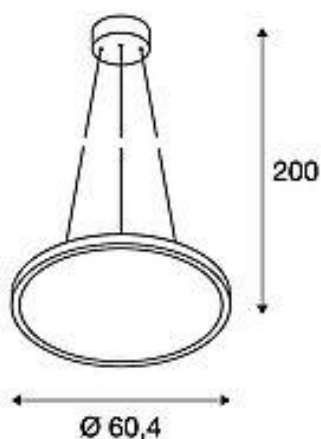


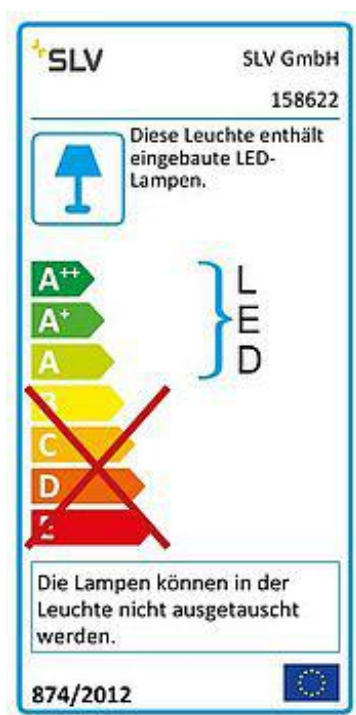

LED PANEL

pendant, 2700K, round, white, dimmable 1 to 10 V, 40W

Article number	158622
Product family	LED Panel
Feed-in capability	No
Lamp included	No
Height	2.7 cm
Diameter	60.4 cm
Pendant length	200 cm
Net weight	4.621 kg
Gross weight	6.18 kg
Voltage	100-240V ~50/60Hz sec. 1000mA
Protection class	I
Beam angle	110 Degree
Average lifespan	30000 Hours
Colour temperature	2700 Kelvin
Colour rendering index	> 80
Luminous flux	2630 lm
Energy efficiency class	A++
Catalogue page	BIG WHITE 2018: 173
Light distribution type 1	direct
Light distribution type 2	rotationally symmetric
Colour	white
Form	round
Material	Aluminium/acrylic glass
Way of mounting	Surface mounted / Ceiling mounted

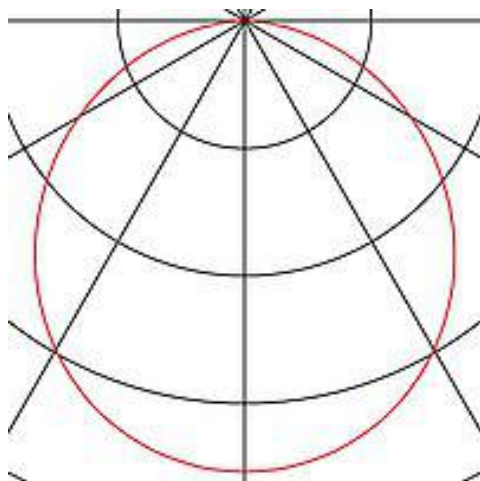

Articles of this series

158602	LED PANEL, recessed and surface-mounted ceiling light, 2700K, square, matt white, L/W/H 59.5/59.5/1.5 cm, 39.5W
158603	LED PANEL, recessed and surface-mounted ceiling light, 3000K, square, matt white, L/W/H 59.5/59.5/1.5 cm, 39.5W
158604	LED PANEL, recessed and surface-mounted ceiling light, 4000K, square, matt white, L/W/H 59.5/59.5/1.5 cm, 39.5W
158612	LED PANEL, recessed and surface-mounted ceiling light, 2700K, square, matt white, L/W/H 61.7/61.7/1.5 cm, 39.5W for grid ceilings
158613	LED PANEL, recessed and surface-mounted ceiling light, 3000K, square, matt white, L/W/H 61.7/61.7/1.5 cm, 39.5W for grid ceilings
158614	LED PANEL, recessed and surface-mounted ceiling light, 4000K, square, matt white, L/W/H 61.7/61.7/1.5 cm, 39.5W for grid ceilings
158623	LED PANEL, pendant, 3000K, round, white, dimmable 1 to 10 V, 40W
158624	LED PANEL, pendant, 4000K, round, white, dimmable 1 to 10 V, 40W
158632	LED PANEL, pendant, 2700K, round, silver-grey, dimmable 1-10 V, 39.8W
158633	LED PANEL, pendant, 3000K, round, silver-grey, dimmable 1 to 10 V, 40W
158634	LED PANEL, pendant, 4000K, round, silver-grey, dimmable 1 to 10 V, 40W
158662	LED PANEL 360, recessed fitting, 2700K, round, white, without a driver, 40W
158663	LED PANEL 360, recessed fitting, 3000K, round, white, without a driver, 40W
158664	LED PANEL 360, recessed fitting, 4000K, round, white, without a driver, 40W
158703	I-VIDUAL LED PANEL, recessed fitting, 3000K, square, white, L/W/H 59.5/59.5/1.2 cm, can be converted to a pendant, 40W
158704	I-VIDUAL LED PANEL, recessed fitting, 4000K, square, white, L/W/H 59.5/59.5/1.2 cm, can be converted to a pendant, 40W

158713	I-VIDUAL LED PANEL, recessed fitting, 3000K, square, white, L/W/H 61.7/61.7/1.2 cm, can be converted to a pendant, 40W
158714	I-VIDUAL LED PANEL, recessed fitting, 4000K, square, white, L/W/H 61.7/61.7/1.2 cm, can be converted to a pendant, 40W
158722	I-PENDANT PRO, pendant, LED, 2700K, square, white matt, 39W
158723	I-PENDANT PRO, pendant, LED, 3000K, square, white matt, 39W
158724	I-PENDANT PRO, pendant, LED, 4000K, square, white matt, 39W
158732	I-PENDANT PRO, pendant, LED, 2700K, square, silver-grey, 39W
158733	I-PENDANT PRO, pendant, LED, 3000K, square, silver-grey, 39W
158734	I-PENDANT PRO, pendant, LED, 4000K, square, silver-grey, 39W
158852	I-PENDANT PRO, pendant, LED, 2700K, white, L/W/H 123/29.5/1.3 cm, 35W
158853	I-PENDANT PRO, pendant, LED, 3000K, white, L/W/H 123/29.5/1.3 cm, 35W
158854	I-PENDANT PRO, pendant, LED, 4000K, white, L/W/H 123/29.5/1.3 cm, 35W
158862	I-PENDANT PRO, pendant, LED, 2700K, silver-grey, L/W/H 123/29.5/1.3 cm, 35W
158863	I-PENDANT PRO, pendant, LED, 3000K, silver-grey, L/W/H 123/29.5/1.3 cm, 35W
158864	I-PENDANT PRO, pendant, LED, 4000K, silver-grey, L/W/H 123/29.5/1.3 cm, 35W

The LED PANEL pendant is available in three different light colours and impresses with its ultra-flat shape and its powerful, dimmable LED modules. The aluminium frame is fitted with an acrylic glass cover which ensures homogeneous and glare-free illumination. The built-in LED driver allows direct connection to a mains supply of 100V to 240V.

Notes

