
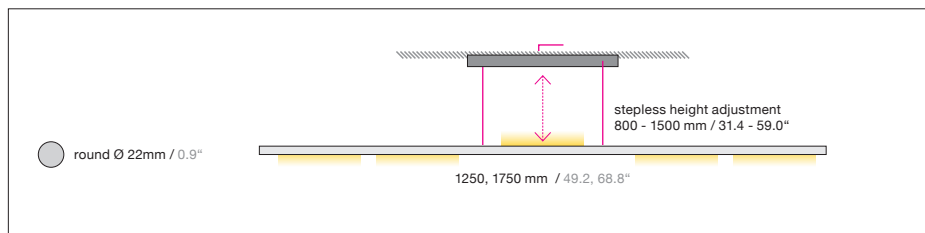
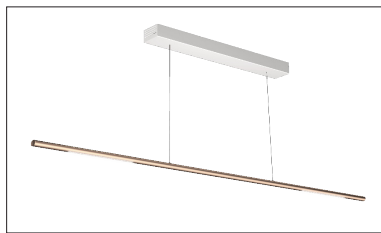


## PALITO LINEA


Housing: Pendant light, solid aluminium housing  
Design: Ulrich Sattler | Michael Schmidt, Code2design




|                                     | Size: Ø / L mm                                                                      | Inches                                        | LED Watt<br>direct / indirect                          | Lumen <sup>1)</sup><br>direct / indirect                                     | Weight <sup>2)</sup> kg/lbs            | Item No.         | LED          | Dimming            | LED          | Finish                                                                                | Power<br>supply<br>cable | Mounting<br>version |
|-------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------|--------------------------------------------------------|------------------------------------------------------------------------------|----------------------------------------|------------------|--------------|--------------------|--------------|---------------------------------------------------------------------------------------|--------------------------|---------------------|
| <b>SIZE</b>                         | <b>Ø 22 / L 1250 mm</b>                                                             | <b>Ø 0.9 / L 49.2"</b>                        | 13 / 6,5                                               | 1.300 / 650                                                                  |                                        | <b>1545.</b>     | x x.         | x x.               | x x.         | x x.                                                                                  | x x x.                   | x                   |
|                                     | <b>Ø 22 / L 1750 mm</b>                                                             | <b>Ø 0.9 / L 68.8"</b>                        | 26 / 6,5                                               | 2.600 / 650                                                                  |                                        | <b>1546.</b>     | x x.         | x x.               | x x.         | x x.                                                                                  | x x x.                   | x                   |
| <b>LED</b><br>CRI > 90<br>*CRI > 80 |    | <b>Standard: Warm-white</b>                   | <b>3000 K</b>                                          |                                                                              |                                        | x x x.           | <b>30.</b>   | x x.               | <b>30.</b>   | x x.                                                                                  | x x x.                   | x                   |
|                                     |                                                                                     | <b>Optional:</b>                              | Neutral-white                                          | 4000 K                                                                       |                                        | x x x.           | <b>40.</b>   | x x.               | <b>40.</b>   | x x.                                                                                  | x x x.                   | x                   |
|                                     |                                                                                     |                                               | Extra warm-white                                       | 2700 K                                                                       |                                        | x x x.           | <b>27.</b>   | x x.               | <b>27.</b>   | x x.                                                                                  | x x x.                   | x                   |
|                                     |                                                                                     |                                               | Tunable white                                          | 2700 - 6500 K*                                                               |                                        | x x x.           | <b>80.</b>   | x x.               | <b>80.</b>   | x x.                                                                                  | x x x.                   | x                   |
|                                     |                                                                                     |                                               | (only with DALI or touchless sensor)                   |                                                                              |                                        |                  |              |                    |              |                                                                                       |                          |                     |
| <b>SELV</b>                         |    |                                               |                                                        |                                                                              |                                        |                  |              |                    |              |                                                                                       |                          |                     |
| <b>Dimming</b>                      |    | <b>Standard:</b>                              | Dimmable TRIAC                                         |                                                                              |                                        | x x x.           | x x.         | <b>11.</b>         | x x.         | x x.                                                                                  | x x x.                   | x                   |
|                                     |                                                                                     | <b>Optional:</b>                              | Dimmable DALI<br>Dimming via touchless gesture control |                                                                              |                                        | x x x.<br>x x x. | x x.<br>x x. | <b>06.<br/>21.</b> | x x.<br>x x. | x x.<br>x x.                                                                          | x x x.<br>x x x.         | x<br>x              |
| <b>Finish</b>                       |   | <b>Standard:</b>                              | <b>66</b> bronze anodised brushed                      |                                                                              |                                        | x x x.           | x x.         | x x.               | x x.         |  | x x x.                   | x                   |
|                                     |                                                                                     | <b>Optional:</b>                              | <b>60</b> silver anodised brushed                      | <b>62</b> black anodised brushed                                             | <b>65</b> champ. gold anodised brushed |                  |              |                    |              |                                                                                       |                          |                     |
| <b>Power supply cable</b>           |  | <b>000</b> current carrying suspension cables |                                                        |                                                                              |                                        | x x x.           | x x.         | x x.               | x x.         | x x.                                                                                  | <b>000.</b>              | x                   |
| <b>Mounting version</b>             |  | <b>Standard:</b>                              | <b>Canopy:</b><br>Type DBH 542                         | Size mm / inch<br>Mounting version Y<br>542 x 53 x 68 mm / 21.3 x 2.1 x 2.7" |                                        | x x x.           | x x.         | x x.               | x x.         | x x.                                                                                  | x x x.                   | <b>Y</b>            |
|                                     |                                                                                     |                                               | Colour white (12), similar RAL 9003                    |                                                                              |                                        |                  |              |                    |              |                                                                                       |                          |                     |

Input voltage for all external power supply units and canopy is 220-240 VAC 50/60 Hz.

### 1250 indirect / direct

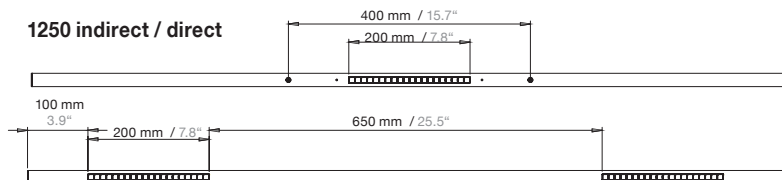

### 1750 indirect / direct

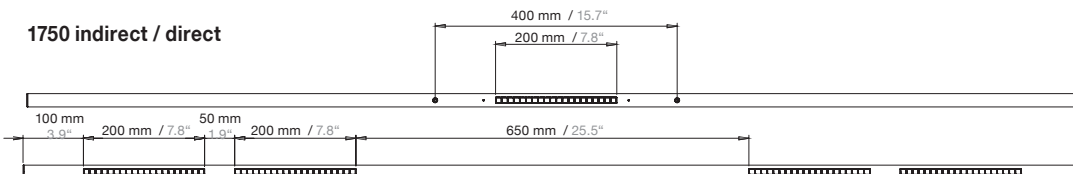

|     |     |     |     |     |             |          |
|-----|-----|-----|-----|-----|-------------|----------|
| --- | --- | --- | --- | --- | <b>000.</b> | <b>Y</b> |
|-----|-----|-----|-----|-----|-------------|----------|

Complete order number



**IP 20**

Protective rating of luminaire



Direct / indirect light distribution



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

www.sattler-lighting.com

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C. / 95° F. 2) Weight of lights without remote technical unit or canopy.