


PALADIO TRACK 35

Housing: Aluminium profile with integrated black 48V DALI power track and diverse light elements
Design: SATTLER

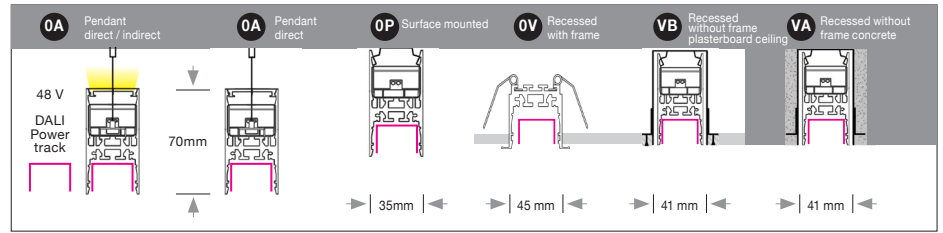

L x W x H mm	Wattage direct / indirect	Lumen direct / indirect	Lumen / W direct / indirect	Weight kg	Item No.	Mounting version	Colour	LED direct	LED indirect	Dimming	Power supply cable
Single luminaire	1130 x 35 x 70										
1410	100 W (48V) / -	- / -	- / -	3,4	2060.	X X.	X X.	00.	01.	X X.	X X X.
2250	100 W (48V) / 10	- / 960	- / 98	4,0	2061.	X X.	X X.	X X.	X X.	X X.	X X X.
2810	100 W (48V) / 20	- / 1.920	- / 98	5,7	2062.	X X.	X X.	X X.	X X.	X X.	X X X.
3370	100 W (48V) / 30	- / 2.880	- / 98	6,9	2063.	X X.	X X.	X X.	X X.	X X.	X X X.
3930	100 W (48V) / 40	- / 3.840	- / 98	8,0	2064.	X X.	X X.	X X.	X X.	X X.	X X X.
				9,3	2065.	X X.	X X.	X X.	X X.	X X.	X X X.

Separate specification sheet for system luminaires

Mounting version	0A	0P	0V	VB	VA						
						X X X X.	--.	X X.	X X.	X X.	X X.
	Pendant	Surface mounted	Recessed with frame	*Recessed without frame (plasterboard ceiling)	*Recessed without frame (concrete)						

*under development

Finish											
Standard		Optional				X X X X.	X X.	--.	X X.	X X.	X X.
	66 bronze anodised		60 silver anodised	62 black anodised	65 champ. gold anodised						

Direct side											
		Paladio Track - power track 48 V DALI	X X X X.	X X.	X X.	00.	01.	X X.	X X.	X X.	X X X.
		A magnetic adapter allows flexible positioning of versatile light elements. Each light element can be addressed individually through DALI.									
		For light elements see page 4.									
		Colour of power track: black									

LED indirect											
		LED	X X X X.	X X.	X X.	X X.	X X.	00.	00.	X X.	X X X.
		Standard: No indirect light output									
		Optional: Neutral-white 4000 K	X X X X.	X X.	X X.	X X.	X X.	40.	X X.	X X.	X X X.
		Warm-white 3000 K	X X X X.	X X.	X X.	X X.	X X.	30.	X X.	X X.	X X X.
		Tunable white 2700 - 6500 K	X X X X.	X X.	X X.	X X.	X X.	80.	X X.	X X.	X X X.

SELV

DIFFUSER


Dimming											
		Standard: Opal diffuser	X X X X.	X X.	X X.	X X.	X X.	X X.	99.	X X.	X X X.
		Standard: Dimmable to 1% via DALI-2, switch Dim	X X X X.	X X.	X X.	X X.	X X.	X X.	06.	X X.	X X X.

Mounting kit											
		Mounting version 0A	X X X X.	X X.	X X.	X X.	X X.	X X.	X X.	X X.	A15.
		1500mm steel cable suspension + 1800 mm PVC cable Z91 transparent	X X X X.	X X.	X X.	X X.	X X.	X X.	X X.	X X.	A30.
		3000 mm steel cable suspension + 3300 mm PVC cable Z91 transparent									
		Mounting version 0P 0V VB VA	X X X X.	X X.	X X.	X X.	X X.	X X.	X X.	X X.	000
		mounting clamps included									

Pieces:

Complete order number:

---	--.	--.	00.	01.	--.	--.	06.	---
-----	-----	-----	------------	------------	-----	-----	------------	-----




PALADIO TRACK 35

Housing: Aluminium profile with integrated black 48V DALI power track and diverse light elements
Design: SATTLER

Accessories

Connection box

Surface mounted connection box + support of steel cable suspension
220 - 240 VAC/DALI



L: 70 mm
W: 70 mm
H: 30 mm



12
white powder coated
RAL 9003



60
silver
anodised



62
black
anodised



65
champ. gold
anodised



66
bronze
anodised

Item No.	Quantity
2002.00.00.00.00. 12	_____
2002.00.00.00.00. 60	_____
2002.00.00.00.00. 62	_____
2002.00.00.00.00. 65	_____
2002.00.00.00.00. 66	_____

End caps

End caps in luminaire colour pre-mounted with every single luminaire.

Cover for power track

black, 2m to be cut to size* 2278.00.00.00.00. **62** _____

*under development


black, 3m to be cut to size* 2279.00.00.00.00. **62** _____

Technical information

L x W x H mm


Item No.
Single luminaire

Direct side mini lens reflector - illumination by segments



1130 x 35 x 70 mm	2060.	
1410	2061.	
2250	2062.	
2810	2063.	
3370	2064.	
3930	2065.	

Indirect side opal diffuser - illumination by segment



1130 x 35 x 70 mm	2060.	
1410	2061.	
2250	2062.	
2810	2063.	
3370	2064.	
3930	2065.	

Input voltage 220 - 240 VAC 50/60 Hz

Dimensions in mm

Maximum series connection

B 16A Circuit breaker (2,5 mm²)
luminaire size up to 3m = 14 pcs.
from 3m = 7 pcs.

B 10A Circuit breaker (1,5 mm²)
luminaire size up to 3m = 8 pcs.
from 3m = 4 pcs.

DALI programming

The table on the right shows the amount of DALI addresses necessary per fixture

			48V DALI power track	indirect light
1130	1410	2250	depending on the amount of light elements	+1
2810	3370	3930	depending on the amount of light elements	+1

Mounting versions

0A - Pendant luminaire


- Suspended with height adjustable steel cables (1500 mm or 3000 mm), adjustment to be done on ceiling
- Recommended minimum distance to ceiling for luminaires with indirect light is 500 mm to achieve even illumination
- Power supply integrated in luminaire.
- Position of suspension points can be repositioned on-site if necessary (within limits, please check with our office)
- Power supply cable included for single luminaires
- Connection box optional**

Suspension points

1130 mm	325	480	325
1410 mm	370	670	370
2250 mm	720	810	720
2810 mm	500	1810	500
3370 mm	735	1900	735
3930 mm	850	2230	850


• Suspension points

⚡ Power supply cable always 35mm beside the suspension point

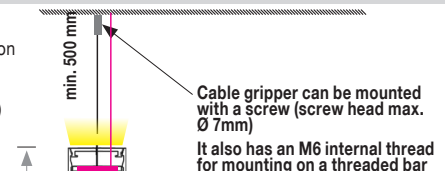

Cable gripper can be mounted with a screw (screw head max. Ø 7mm)
It also has an M6 internal thread for mounting on a threaded bar

Connection box optional

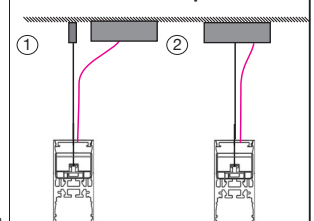


Dimensions in mm


PALADIO TRACK 35

OP - Surface mounted luminaire


- Surface mounting with mounting brackets
- Position of mounting brackets can be adjusted on-site if necessary
- Power supply cable not included
- Power supply and terminal clamp integrated in luminaire
- Minimal distance to wall and other objects 50 mm
- Position of power supply outlet flexible




1) Fix brackets for quick installation with screws



2) Click in profile which is secured by an assembly rope

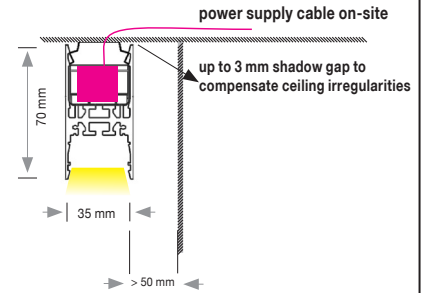



Fixation points

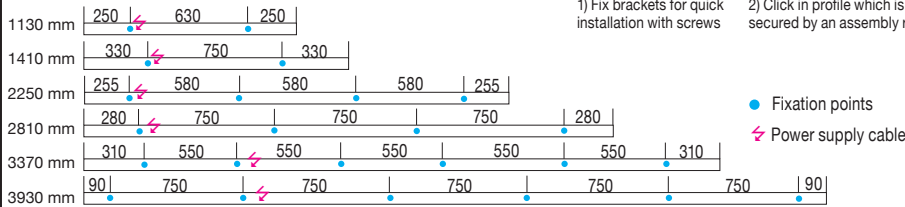


Dimensions in mm

OV - Recessed luminaire with frame

- Luminaire with springs for easy mounting in plasterboard ceiling
- Delivery with quick mounting plug (Adels AC 164/5) incl. 500 mm connection cable
- Up to ceiling thickness of 35 mm
- Fixation points can be adapted on-site if necessary

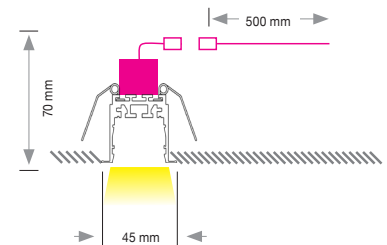


Fixation points

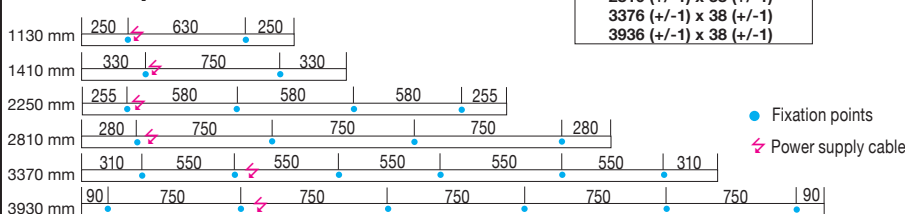


Dimensions in mm

VB - Recessed luminaire frameless plasterboard ceiling

- Luminaire for frameless recessed mounting in plasterboard ceiling
- Power supply cable not included
- Power supply integrated in luminaire
- Incl. mounting profile
- For further details see mounting instructions

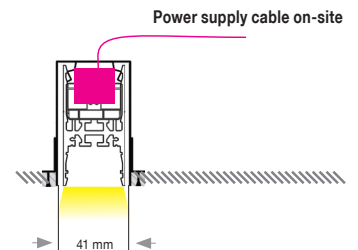

Fixation points

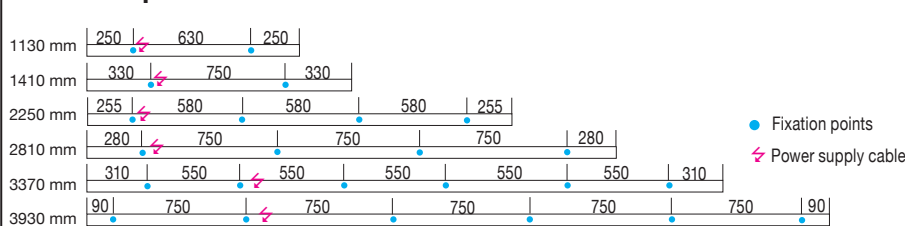


Dimensions in mm


under development

VA - Recessed luminaire frameless concrete ceiling

- Luminaire for frameless recessed mounting in concrete ceiling
- Power supply cable not included
- Power supply integrated in luminaire
- Incl. mounting profile for recessed mounting into concrete
- For further details see mounting instructions

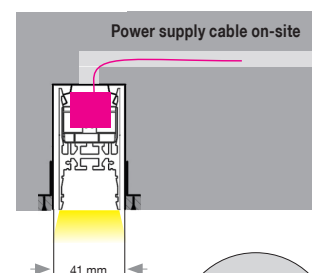

Fixation points

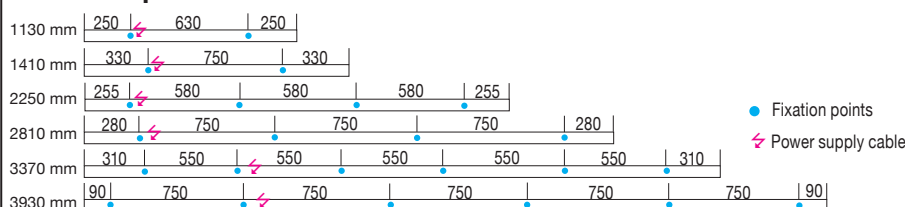


Dimensions in mm

under development

PALADIO TRACK 35

Light elements and
luminaires for 48V DALI
power track

Housing: Aluminium profile with integrated black 48V DALI power track and diverse light elements
Design: SATTLER

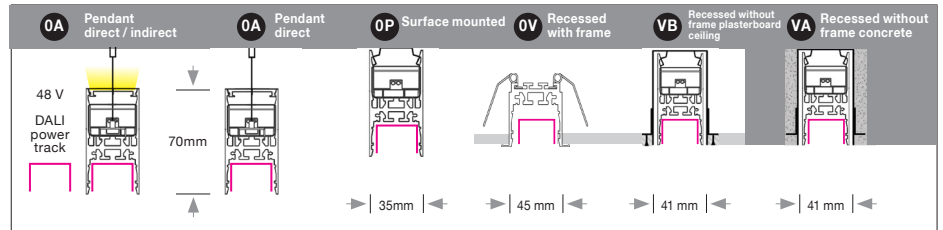

The integrated magnetic adapter allows any positioning of light elements with reflector, microprism or opal diffuser on the 48V track of the PALADIO profile.


Attachable lights from the SATTLER portfolio, such as FINO SPOT 2, FINO PENDANT, EVOLUTION SPOT, AVVENI SPOT, AVVENI PENDANT and PALITO can also be freely positioned on the track with the magnetic adapter.


Each individual system luminaire of the PALADIO system can be equipped with light elements with a maximum of 100W.

L x W x H mm	Wattage	Lumen	Weight ²⁾ kg	Item No.	
Light elements for 48V DALI power track					-- . Light temperature optional 40. (4000 K) or 30. (3000 K)
Reflectors 286 x 22 x 25 567 x 22 x 25 567 x 22 x 50 240° rotatable CRI > 95 UGR < 19	5,2 9,9 9,9	412 825 984	0,20 0,38	2011. 2012. 2022.	-- . 06.00.62.000.Z -- . 06.00.62.000.Z -- . 06.00.62.000.Z
Microprism 567 x 22 x 25 1128 x 22 x 25 CRI > 90 UGR < 25	11,9 23,8	704 1409	0,28 0,56	2017. 2019.	-- . 06.00.62.000.Z -- . 06.00.62.000.Z
Opal 567 x 22 x 25 1128 x 22 x 25 CRI > 90 UGR < 29	11,9 23,8	1005 2011	0,28 0,56	2007. 2009.	-- . 06.00.62.000.Z -- . 06.00.62.000.Z
Attachable lights for 48V DALI power track					
FINO SPOT 2 Ø 22 / L 165	5	365	0,4	1539.	For further information see Spec Sheet FINO SPOT 2
FINO PENDANT Ø 22 / L 600 Ø 22 / L 800 Ø 22 / L 1240 Ø 22 / L 1550	5 5 5 5	365 365 365 365	0,5 0,7 0,8 0,8	1533. 1534. 1535. 1536.	For further information see Spec Sheet FINO PENDANT
EVOLUTION SPOT Ø 42 / L 110 38°	6,3	858		1778. 1779.	For further information see Spec Sheet EVOLUTION SPOT
AVVENI SPOT Ø 169 / L 270	max. 19	1268	1,6	1805.	For further information see Spec Sheet AVVENI SPOT
AVVENI PENDANT 1 Ø 134 / H 101	max. 19	1268	0,8	1211.	For further information see Spec Sheet AVVENI PENDANT 1
PALITO Ø 22 / L 1240 Ø 22 / L 1550	15 22	1514 2270	3,1 4,4	1541. 1542.	For further information see Spec Sheet PALITO

PALADIO TRACK 35

Housing: Aluminium profile with integrated black 48V DALI power track and diverse light elements
Design: SATTLER

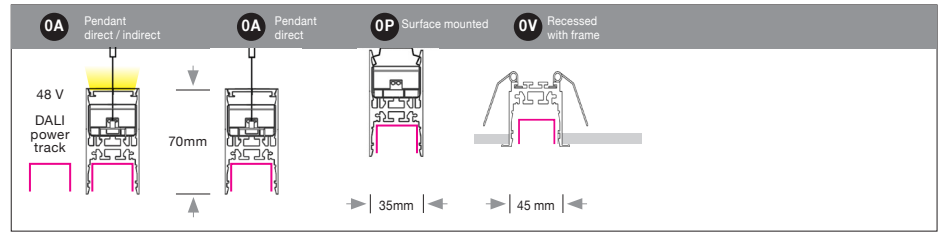

L x W x H mm		Wattage direct / indirect	Lumen direct / indirect	Lumen / W direct / indirect	Weight kg	Item No.	Mounting version	Colour	LED direct		LED indirect		Dimming	Power supply cable	
System luminaire  End caps, connectors, power supply cables and PALADIO CONNECT elements to be ordered separately, see page 2	1130 x 35 x 70	100W/ 48V / -	- / -	- / -	3,4	2260.	x x.	x x.	00.	01.	00.	00.	x x.	x x x.	
	1410	100W/ 48V / -	- / -	- / -	4,0	2261.	x x.	x x.	x x.	x x.	x x.	x x.	x x.	x x x.	
	2250	100 W 48V / 20	- / 1.920	- / 98	5,7	2262.	x x.	x x.	x x.	x x.	x x.	x x.	x x.	x x x.	
	2810	100 W 48V / 20	- / 1.920	- / 98	6,9	2263.	x x.	x x.	x x.	x x.	x x.	x x.	x x.	x x x.	
	3370	100 W 48V / 30	- / 2.880	- / 98	8,0	2264.	x x.	x x.	x x.	x x.	x x.	x x.	x x.	x x x.	
3930	100 W 48V / 40	- / 3.840	- / 98	9,3	2265.	x x.	x x.	x x.	x x.	x x.	x x.	x x.	x x.	x x x.	
Separate specification sheet for single luminaires															
Mounting version	 Pendant					x x x x.	 Surface mounted	x x.	x x.	x x.	x x.	x x.	x x.	x x x.	
	 Recessed with frame														
Finish	 66 bronze anodised					x x x x.	x x.	 60 silver anodised	 62 black anodised	 65 champ. gold anodised	x x.	x x.	x x.	x x.	x x x.
Standard	Optional														
Direct side		Paladio Track - power track 48 V DALI A magnetic adapter allows flexible positioning of versatile light elements. Each light element can be addressed individually through DALI. For light elements see page 4. Colour of power track: black				x x x x.	x x.	x x.	00.	01.	x x.	x x.	x x.	x x x.	
LED indirect  Only available for mounting version 0A. Indirect light not continuous, see page 2 CRI > 90 MacAdam 3 L 80 B10 72.000 h SELV	LED Standard: No indirect light output					x x x x.	x x.	x x.	x x.	x x.	00.	00.	x x.	x x x.	
	Optional: Neutral-white 4000 K Warm-white 3000 K Tunable white 2700 - 6500 K					x x x x.	x x.	x x.	x x.	x x.	40.	30	x x.	x x.	x x x.
	DIFFUSER Standard: Opal diffuser					x x x x.	x x.	x x.	x x.	x x.	x x.	80.	x x.	x x.	x x x.
						x x x x.	x x.	x x.	x x.	x x.	x x.	99.	x x.	x x.	x x x.
Dimming	Standard: Dimmable to 1% via DALI-2, switch Dim					x x x x.	x x.	x x.	x x.	x x.	x x.	x x.	06.	x x x.	
Mounting kit	Mounting version 0A 1500 mm steel cable suspension 3000 mm steel cable suspension					x x x x.	x x.	x x.	x x.	x x.	x x.	x x.	x x.	A15.	
	Mounting version 0P 0V VB VA mounting clamps included					x x x x.	x x.	x x.	x x.	x x.	x x.	x x.	x x.	A30.	
						x x x x.	x x.	x x.	x x.	x x.	x x.	x x.	x x.	000.	

Please order power supply cable separately, see page 2

Pieces:

Complete order number:

---	---	---	00.	01.	---	---	06.	---
-----	-----	-----	-----	-----	-----	-----	-----	-----



Handcrafted in Germany, certified quality



IP 20 Protective rating of luminaire



Protection class I



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

Housing: Aluminium profile with integrated black 48V DALI power track and diverse light elements
Design: SATTLER

Accessories

Connection box

Surface mounted connection box + support of steel cable suspension
220 - 240 VAC/DALI



L: 70 mm
W: 70 mm
H: 30 mm



12
white powder coated
RAL 9003



60
silver
anodised



62
black
anodised



65
champ. gold
anodised



66
bronze
anodised

Item No.	Quantity
2002.00.00.00.00.	12 _____
2002.00.00.00.00.	60 _____
2002.00.00.00.00.	62 _____
2002.00.00.00.00.	65 _____
2002.00.00.00.00.	66 _____

End caps for
system luminaires

Set of two

Surface mounted
Pendant



60
silver
anodised



62
black
anodised



65
champ. gold
anodised



66
bronze
anodised

2245.00.00.00.00.	60 _____
2245.00.00.00.00.	62 _____
2245.00.00.00.00.	65 _____
2245.00.00.00.00.	66 _____

Recessed



60
silver
anodised



62
black
anodised



65
champ. gold
anodised



66
bronze
anodised

2246.00.00.00.00.	60 _____
2246.00.00.00.00.	62 _____
2246.00.00.00.00.	65 _____
2246.00.00.00.00.	66 _____

Power supply cable

Power supply cable PVC transparent 1800 mm
Power supply cable PVC transparent 3300 mm
Wiring between connected system luminaire by 220-240 VAC / DALI connecting clamps.

2000.00.00.00.00.	00 _____
2001.00.00.00.00.	00 _____

Connector set

The connector set is to be ordered separately in the respective quantity for each connection point. Connector Set consists of components for mechanical, optical and electrical connection, see page 4

**symmetrical
diffuser**
PRISM | LENS | TRACK

Surface mounted
Recessed
Pendant

2247.0P.00.00.00.	00 _____
2248.0V.00.00.00.	00 _____
2249.0A.00.00.00.	00 _____

**asymmetrical
diffuser**
PRISM

Surface mounted
Recessed
Pendant

2227.0P.00.00.00.	00 _____
2228.0V.00.00.00.	00 _____
2229.0A.00.00.00.	00 _____

Cover for power track

black, 2m to be cut to size*
black, 3m to be cut to size*

2278.00.00.00.00.	62 _____
2279.00.00.00.00.	62 _____

*under development

PALADIO CONNECT
Connection elements

Please order PALADIO CONNECT elements for system luminaires with separate specification sheet.

Connector Set



90°
connector



120°
connector



cross
connector



T-connector




individual
connector

Technical information

L x W x H mm

Item No.
System luminaire

Direct side position of suspension points



1130 x 35 x 70 mm

1410

2250

2810

3370

3930

2260.


2261.

2262.

2263.


2264.

2265.

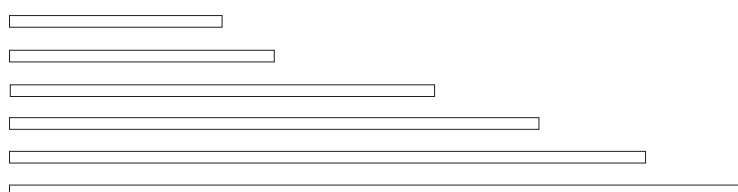

Input voltage 220 - 240 VAC 50/60 Hz

Indirect side opal diffuser - illumination by segments



1130 x 35 x 70 mm

1410

2250

2810

3370


3930

2262.

2263.

2264.

2265.

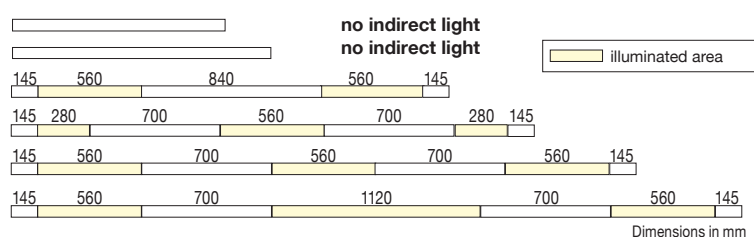Maximum
series connection

B 16A Circuit breaker (2,5 mm²)
luminaire size up to 3m = 14 pcs.
from 3m = 7 pcs.

B 10A Circuit breaker (1,5 mm²)
luminaire size up to 3m = 8 pcs.
from 3m = 4 pcs.

DALI programming

The table on the right shows the amount of DALI addresses necessary per fixture



			48V DALI power track	indirect light
1130	1410	2250	depending on the amount of light elements	+1
2810	3370	3930	depending on the amount of light elements	+1

Mounting versions


0A - Pendant luminaire

- Suspended with height adjustable steel cables (1500 mm or 3000 mm), adjustment to be done on ceiling
- Recommended minimum distance to ceiling for luminaires with indirect light is 500 mm to achieve even illumination
- Power supply integrated in luminaire.
- Position of suspension points can be repositioned on-site if necessary (within limits, please check with our office)
- Power supply cable included for single luminaires
- **Connection box optional**

Suspension points

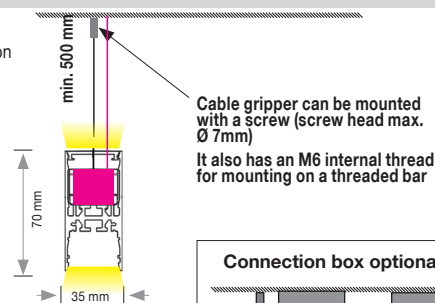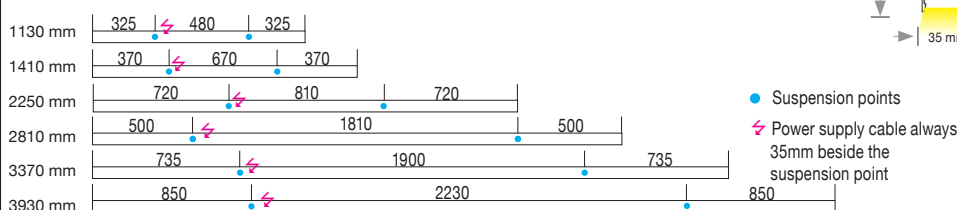

Connection box optional




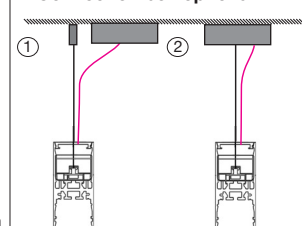


Dimensions in mm

0P - Surface mounted luminaire

- Surface mounting with mounting brackets
- Position of mounting brackets can be adjusted on-site if necessary
- Power supply cable not included
- Power supply and terminal clamp integrated in luminaire
- Minimal distance to wall and other objects 50 mm
- Position of power supply outlet flexible

Fixation points

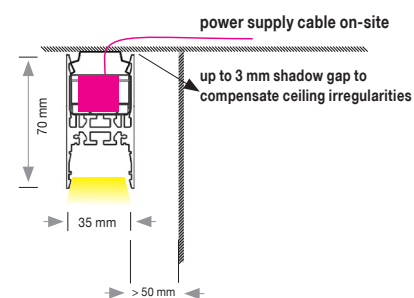

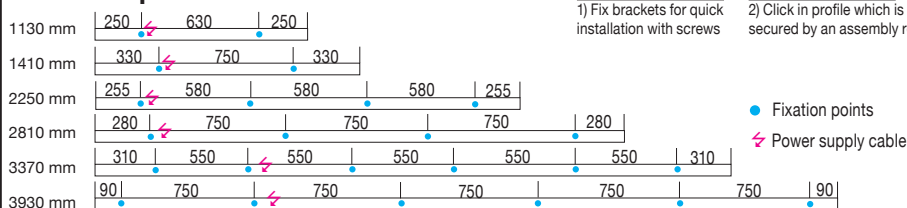


Dimensions in mm

0V - Recessed luminaire with frame

- Luminaire with springs for easy mounting in plasterboard ceiling
- Delivery with quick mounting plug (Adels AC 164/5) incl. 500 mm connection cable
- Up to ceiling thickness of 35 mm
- Fixation points can be adapted on-site if necessary

Fixation points

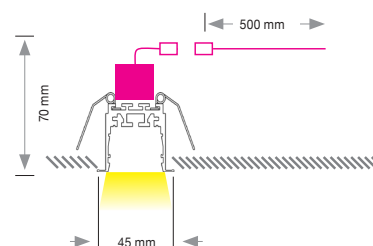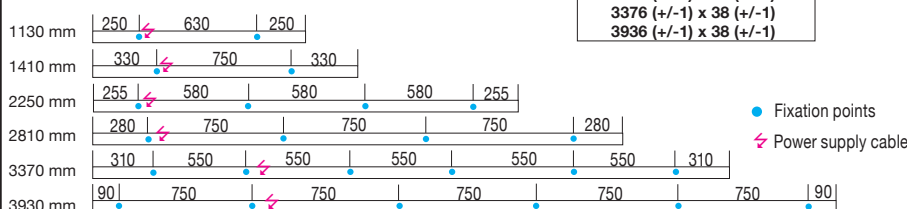


Dimensions in mm

PALADIO TRACK 35

Light elements and
luminaires for 48V DALI
power track






Housing: Aluminium profile with integrated black 48V DALI power track and diverse light elements
Design: SATTLER

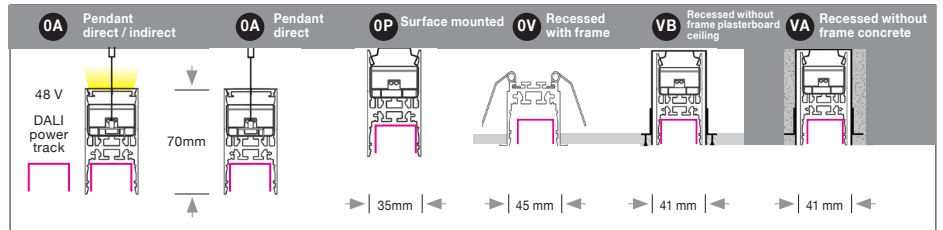

The integrated magnetic adapter allows any positioning of light elements with reflector, microprism or opal diffuser on the 48V track of the PALADIO profile.

Attachable lights from the SATTLER portfolio, such as FINO SPOT 2, FINO PENDANT, EVOLUTION SPOT, AVVENI SPOT, AVVENI PENDANT and PALITO can also be freely positioned on the track with the magnetic adapter.


Each individual system luminaire of the PALADIO system can be equipped with light elements with a maximum of 100W.

L x W x H mm	Wattage	Lumen	Weight ²⁾ kg	Item No.		
Light elements for 48V DALI power track					- Housing colour black - control via track (DALI) - with adapter for power track H= 43 mm, visible H=25mm	
					-- . Light temperature optional 40. (4000 K) or 30. (3000 K)	
Reflectors  CRI > 95 UGR < 19	286 x 22 x 25 567 x 22 x 25 567 x 22 x 50 240° rotatable	5,2 9,9 9,9	412 825 984	0,20 0,38	2011. 2012. 2022.	-- . 06.00.62.000.Z -- . 06.00.62.000.Z -- . 06.00.62.000.Z 
Microprism  CRI > 90 UGR < 25	567 x 22 x 25 1128 x 22 x 25	11,9 23,8	704 1409	0,28 0,56	2017. 2019.	-- . 06.00.62.000.Z -- . 06.00.62.000.Z 
Opal  CRI > 90 UGR < 29	567 x 22 x 25 1128 x 22 x 25	11,9 23,8	1005 2011	0,28 0,56	2007. 2009.	-- . 06.00.62.000.Z -- . 06.00.62.000.Z 
Attachable lights for 48V DALI power track						
FINO SPOT 2  Ø 22 / L 165	5	365	0,4	1539.	For further information see Spec Sheet FINO SPOT 2	
FINO PENDANT  Ø 22 / L 600 Ø 22 / L 800 Ø 22 / L 1240 Ø 22 / L 1550	5 5 5 5	365 365 365 365	0,5 0,7 0,8 0,8	1533. 1534. 1535. 1536.	For further information see Spec Sheet FINO PENDANT	
EVOLUTION SPOT  Ø 42 / L 110 38°	6,3	858		1778. 1779.	For further information see Spec Sheet EVOLUTION SPOT	
AVVENI SPOT  Ø 169 / L 270	max. 19	1268	1,6	1805.	For further information see Spec Sheet AVVENI SPOT	
AVVENI PENDANT 1  Ø 134 / H 101	max. 19	1268	0,8	1211.	For further information see Spec Sheet AVVENI PENDANT 1	
PALITO  Ø 22 / L 1240 Ø 22 / L 1550	15 22	1514 2270	3,1 4,4	1541. 1542.	For further information see Spec Sheet PALITO	

PALADIO SYSTEM

ORDER EXAMPLE

The diverse components of the PALADIO series give you the possibility to create your individually designed PALADIO SYSTEM LUMINAIRE. The illustration below shows only one of the various possibilities offered by the PALADIO System.

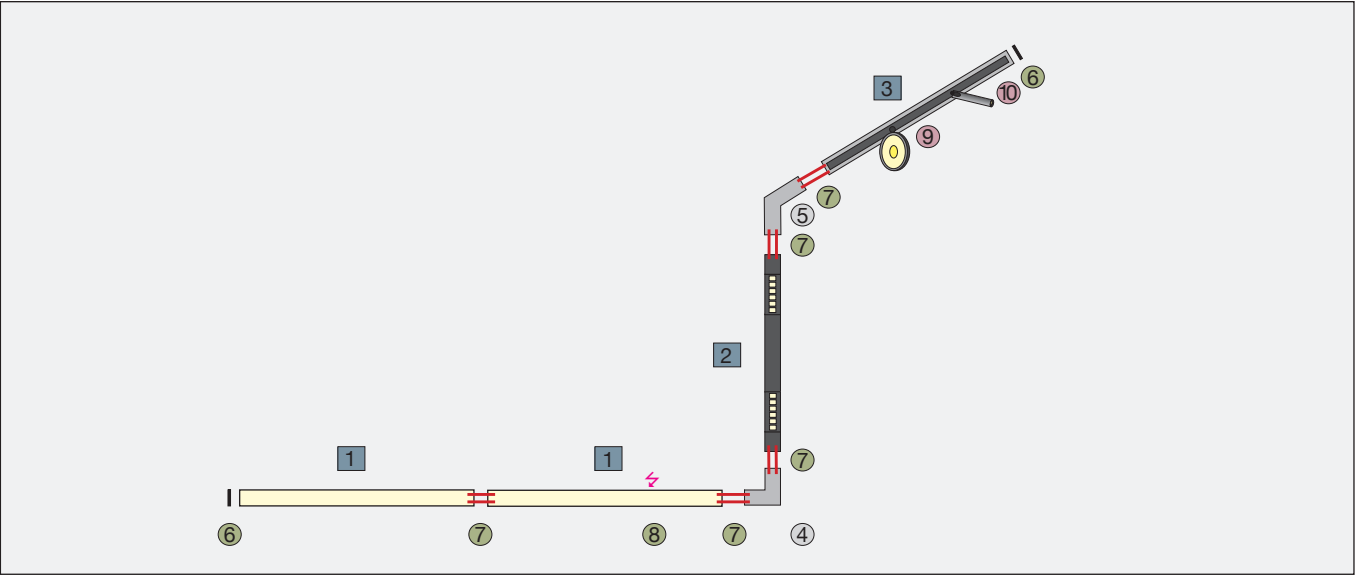

Luminaires	Connectors	Accessories	Light elements (TRACK)
1 PRISM 1130 mm 2 LENS 1410 mm 3 TRACK 1410 mm	4 90° connector 5 120° connector	6 End caps 7 Connector Set 8 Power supply cable	9 AVVENI SPOT 10 FINO SPOT 2