







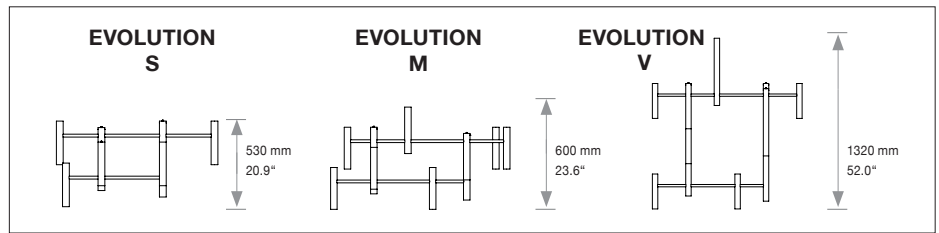






EVOLUTION

S / M / Vertical

Housing: Pendant light, solid aluminium housing
Design: Ulrich Sattler | Michael Schmidt, Code2design



SIZE	Size: L x B x H mm Size: L x W x H Inches	LED Watt	Lumen ¹⁾ direct /indirect	Weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version							
	EVOLUTION - S 1000 x 1000 x 530 mm 39.4 x 39.4 x 20.9“	direct light distribution 47	4300	8,0 / 17.64	1780.	x x.	x x.	x x.	x x.	x x x.	x							
	EVOLUTION - M 1258 x 1158 x 600 mm 49.5 x 45.6 x 23.6“	direct light distribution 71	6450	12,0 / 26.46	1781.	x x.	x x.	x x.	x x.	x x x.	x							
	EVOLUTION - Vertical 1 element 1158 x 1158 x 1320 mm 45.6 x 45.6 x 52.0“	direct light distribution 57	5160	16,0 / 35.27	1782.	x x.	x x.	x x.	x x.	x x x.	x							
	2 elements vertically suspended* 1158 x 1158 x 2740 mm 45.6 x 45.6 x 107.9“	direct and indirect light distribution 137	10320 / 2150	32,0 / 70.54	1783.	x x.	x x.	x x.	x x.	x x x.	x							
	3 elements vertically suspended* 1158 x 1158 x 4160 mm 45.6 x 45.6 x 163.8“	direct and indirect light distribution 217	15480 / 4300	48,0 / 105.81	1784.	x x.	x x.	x x.	x x.	x x x.	x							
	* Minimum distance of 100 mm between elements included.																	
Direct LED 24V CRI > 90		Standard: Warm-white	3000 K		x x x.	30.	x x.	x x.	x x.	x x x.	x							
		Optional: Extra warm-white Neutral-white	2700 K		x x x.	27.	x x.	x x.	x x.	x x x.	x							
			4000 K		x x x.	40.	x x.	x x.	x x.	x x x.	x							
Indirect LED 24V CRI > 90		EVOLUTION S,M, Vertical 1: no indirect light output			x x x.	x x.	x x.	00.	x x.	x x x.	x							
		EVOLUTION VERICAL 2 and 3 elements: indirect light output same light colour as direct			xxx.	x x.	x x.		x x.	x x x.	x							
Dimming		Standard: Without Dimmer			x x x.	x x.	01.	x x.	x x.	x x x.	x							
		Optional: Dimmable DALI Dimmable CASAMBI Bluetooth 4.0 remote control through app			x x x.	x x.	61.	x x.	x x.	x x x.	x							
					x x x.	x x.	81.	x x.	x x.	x x x.	x							
Finish		65 champ. gold anodised brushed			x x x.	x x.	x x.	x x.	65.	x x x.	x							
Power supply cable		Z 80 Black			x x x.	x x.	x x.	x x.	x x.	Z80.	x							
Mounting version		4-point suspension with external power supply in suspended ceiling	Distance of external power supply unit to light fixture max. 10 m / 394" EVOLUTION-S und EVOLUTION-M: Including steel cable suspension 5 m / 197" and power supply cable 5 m / 197". EVOLUTION-Vertical: Including steel cable suspension 10 m / 394" and power supply		x x x.	x x.	x x.	x x.	x x.	x x x.	A							
<div><div><div>Power supply (L x B x H) 325 x 45 x 31 mm Input voltage for all external power supply unit is 220-240 VAC 50/60 Hz</div><div></div></div><div><div></div><div><table><tr><td>x x x.</td><td>x x.</td><td>x x.</td><td>--.</td><td>65.</td><td>Z80.</td><td>A</td></tr></table></div></div><div>Complete order number</div></div>												x x x.	x x.	x x.	--.	65.	Z80.	A
x x x.	x x.	x x.	--.	65.	Z80.	A												

