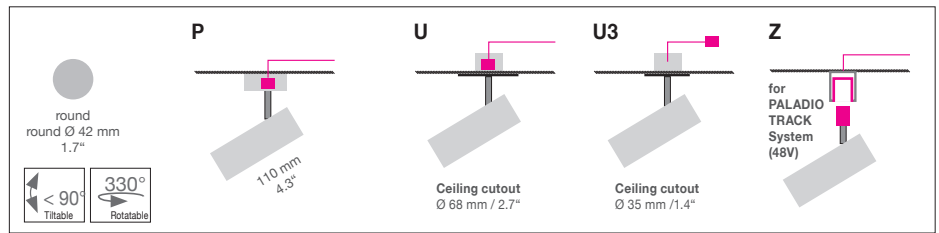
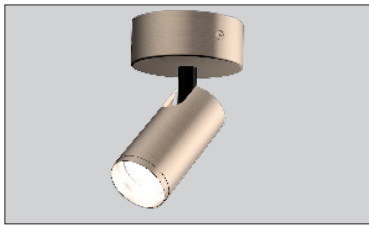















## EVOLUTION SPOT

Housing: Spotlight, solid aluminium housing, 330° hinge, 24° and 38°  
Design: Ulrich Sattler



	Size: Ø / L mm	Inches	LED Watt	Lumen <sup>1)</sup>	Weight <sup>2)</sup> kg/lbs	Beam angle	Item No.	LED direct	Dimming	LED indirect	Finish	Power supply cable	Mounting version		
Size	Ø 42 / L 110 mm	Ø 1.7 / L 4.3"	6,3	858	0,4 / 0.88	24°	1778.	x x .	x x .	x x .	x x .	x x x .	x x		
	Ø 42 / L 110 mm	Ø 1.7 / L 4.3"	6,3	858	0,4 / 0.86	38°	1779.	x x .	x x .	x x .	x x .	x x x .	x x		
LED		Standard: Warm-white 3000 K						x x x .	30.	x x .	x x .	x x .	x x x .	x x	
CRI > 90		 24°	 38°	Optional: Neutral-white 4000 K			x x x .	40.	x x .	x x .	x x .	x x x .	x x		
				Extra warm-white 2700 K			x x x .	27.	x x .	x x .	x x .	x x x .	x		
Dimming		Standard: Dimmable TRIAC (P) (U)						x x x .	x x .	11.	00.	x x .	x x x .	x x	
		Dimmable DALI (Z)						x x x .	x x .	61.	00.	x x .	x x x .	x x	
		Optional: Dimmable DALI (U)						x x x .	x x .	61.	00.	x x .	x x x .	x x	
Finish															
Standard:	66 bronze anodised brushed	Optional: 60 silver anodised brushed	62 black anodised brushed	65 champ. gold anodised brushed	12 white, powder coated, similar RAL 9003		x x x .	x x .	x x .	x x .	--.	x x x .	x x		
Mounting version															
Standard:	Direct ceiling mounting with power supply unit in canopy	Optional: (U) Cover Ø 80 mm / 3.1" Ceiling cutout 68 mm / 2.7" Power supply unit in cavity box	(U3) Cover Ø 50mm / 2.0" Ceiling cutout 35 mm / 1.4" Power supply unit in suspended ceiling	Mounting with adapter for 48V PALADIO TRACK System					x x x .	x x .	x x .	x x .	x x .	x x x .	--.
														*mounting version U3 available from the 4th quarter of 2020	

\*mounting version U3 available from the 4th quarter of 2020

Canopy:			For use with Mounting version			Protective rating			Complete order number		
Type											
DA 50	Cover Ø 50mm / 2.0" Ceiling cutout 35 mm / 1.4" Power supply unit in cavity box colour: white RAL 9003		U3			IP 40			--.	--.	--.
DA 80	Cover Ø 80mm / 3.1" Ceiling cutout 68mm / 2.7" Power supply unit in cavity box colour: white RAL 9003		U			IP 40			00.	000.	--.
DB 78/32	Cover Ø 78 mm / 3.0" H 32 mm / 1.2" Same colour as luminaire		P			IP 40					

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz.



Handcrafted in Germany, certified quality

IP 20

Protective rating of luminaire



Direct light distribution



Protection class I



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F