



EVOLUTION CEILING

Housing: Ceiling Light with Click-lock, solid aluminium housing.
Design: Ulrich Sattler

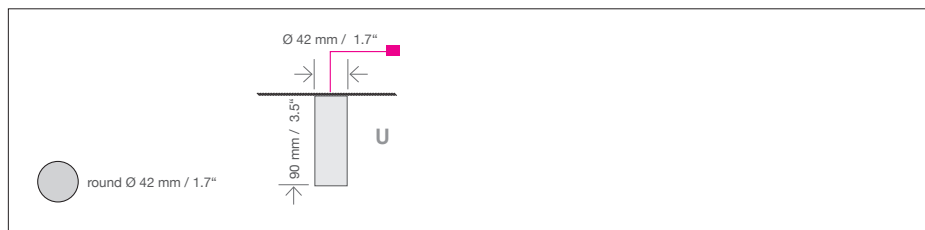

	Size: Ø / H mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Beam angle	Item No.	LED direct	Dimming	LED indirect	Finish	Power supply cable	Mounting version
Size	Ø 42 / H 90 mm	Ø 1.7 / L 3.5"	6,3	858	0,4 / 0.88	24° 38°	1776. 1777.	x x. x x.	x x. x x.	x x. x x.	x x. x x.	x x x. x x x.	x x
LED		Standard: Warm-white	3000 K				x x x.	30.	x x.	x x.	x x.	x x x.	x
CRI > 90		Optional: Neutral-white	4000 K				x x x.	40.	x x.	x x.	x x.	x x x.	x
		Extra warm-white	2700 K				x x x.	27.	x x.	x x.	x x.	x x x.	x
SELV													
		Standard: Dimmable TRIAC					x x x.	x x.	11.	00.	x x.	x x x.	x
Dimming		Optional: Dimmable DALI					x x x.	x x.	06.	00.	x x.	x x x.	x
Finish													
Standard:	66 bronze anodised brushed	Optional:	60 silver anodised brushed	62 black anodised brushed	65 champ. gold anodised brushed	12 white, powder coated, similar RAL 9003	x x x.	x x.	x x.	x x.	--.	x x x.	x
Mounting version		Deckeneinbau, Anschluss über 2m Kabel an Netzteil, dieses wird separat über Revisionsöffnung in Zwischendecke eingelegt. Installation in ceiling, connection via 2m cable to power supply unit, this is inserted separately into ceiling via inspection opening.					x x x.	x x.	x x.	x x.	x x.	x x x.	U.



---	---	---	00.	---	000.	U.
-----	-----	-----	------------	-----	-------------	-----------

Complete order number

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz.



Handcrafted in Germany, certified quality



Protective rating of luminaire



Direct light distribution



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F