


PANZERI

MARK

24V DC
X01701.055.0410

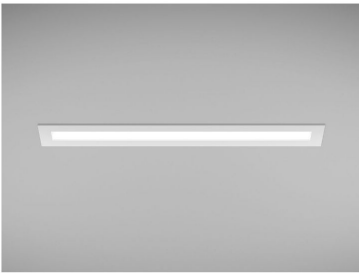

Lighting fixture for ceiling or wall built-in installation for interiors, with direct light emission.

Built-in structure in plasterboard, in aluminium in white polyacrylic paint.

Reflector in aluminium in white polyacrylic paint.

Pickled sheet metal closing frame in white, black, bronze, matt brass or titanium polyacrylic paint.

Stainless steel spring clips for plasterboard fixing.

Built-in hole dimension: 535x70mm (21,1x2,8")

Data sheet



CODE	X01701.055.0410
SYSTEM POWER CONSUMPTION	17W
EFFICACY	42.53lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	24V DC
FREQUENCY	
ELECTRICAL CONFIGURATION	
DRIVER	Remote Not Included
NOMINAL LUMINOUS FLUX	2152lm
LUMEN OUTPUT	723lm
EFFICIENCY	33.597%
WEIGHT	0,5900Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	0 x 0 x 0

Finish

White




Technical drawing

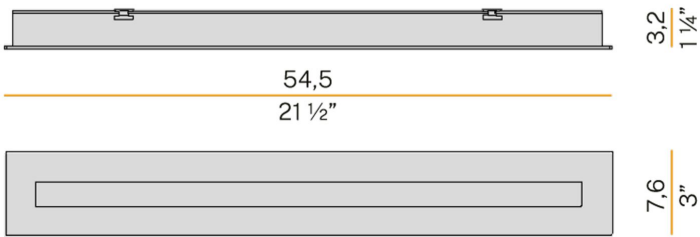

PANZERI

MARK

24V DC
X01701.080.0410

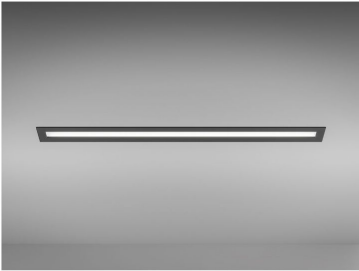

Lighting fixture for ceiling or wall built-in installation for interiors, with direct light emission.

Built-in structure in plasterboard, in aluminium in white polyacrylic paint.

Reflector in aluminium in white polyacrylic paint.

Pickled sheet metal closing frame in white, black, bronze, matt brass or titanium polyacrylic paint.

Stainless steel spring clips for plasterboard fixing.

Built-in hole dimension: 785x70mm (30,9x2,8")

Data sheet

CODE	X01701.080.0410
SYSTEM POWER CONSUMPTION	25W
EFFICACY	43.4lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	24V DC
FREQUENCY	
ELECTRICAL CONFIGURATION	
DRIVER	Remote Not Included
NOMINAL LUMINOUS FLUX	3228lm
LUMEN OUTPUT	1085lm
EFFICIENCY	33.612%
WEIGHT	0,5900Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	0 x 0 x 0

Finish

White



Technical drawing

