

PANZERI

PLANET RING

220-240V AC ON-OFF
P08301.070.0401

Ceiling lighting fixture for interiors, with direct light emission.
Pickled sheet metal structure in white polyacrylic paint.
Aluminium dissipation plate.
Pickled sheet metal closing frame in polyacrylic paint.
Modelled polycarbonate diffuser with opaline finish.



Data sheet


CODE	P08301.070.0401
SYSTEM POWER CONSUMPTION	71W
EFFICACY	82.59lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	8857lm
LUMEN OUTPUT	5864lm
EFFICIENCY	66.208%
WEIGHT	8,6050Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	70 x 70 x 18



Finish

White

Technical drawing

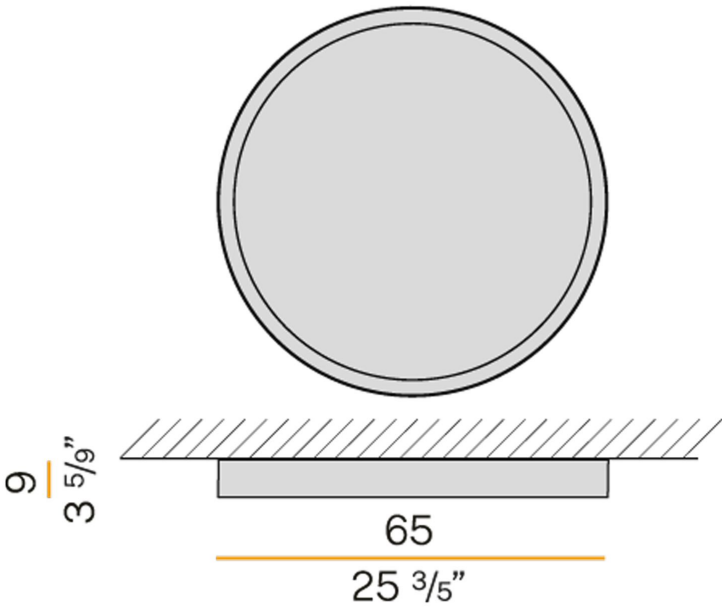

PANZERI

PLANET RING

220-240V AC emergency
P08301.040.0407

Ceiling lighting fixture for interiors, with direct light emission.
Pickled sheet metal structure in white polyacrylic paint.
Pickled sheet metal closing frame in polyacrylic paint.
Modelled polycarbonate diffuser with opaline finish.



Data sheet

CODE	P08301.040.0407
SYSTEM POWER CONSUMPTION	28W
EFFICACY	78.54lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	Emergency
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	3321lm
LUMEN OUTPUT	2199lm
EFFICIENCY	66.215%
WEIGHT	3,8000Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	46 x 15 x 46

Finish

White



Technical drawing

