

PANZERI

ZERO

220-240V AC ON-OFF

A03501.100.0401

Ceiling or wall lighting fixture for interiors, with direct and indirect light emission. Pickled sheet metal structure in white, bronze or matt brass polyacrylic paint, or with gold leaf coating, or in polished stainless steel. Specular aluminium reflector. Cover in brass with white, bronze or matt brass polyacrylic paint, or with gold leaf coating, or with galvanic chrome plating. Extruded polycarbonate diffuser with opaline finish.



Data sheet


CODE	A03501.100.0401
SYSTEM POWER CONSUMPTION	20W
EFFICACY	61.35lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	1980lm
LUMEN OUTPUT	1227lm
EFFICIENCY	61.97%
WEIGHT	2,400Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	
PACKING DIMENSIONS (CM)	10 x 108 x 7

Finish

White



Technical drawing

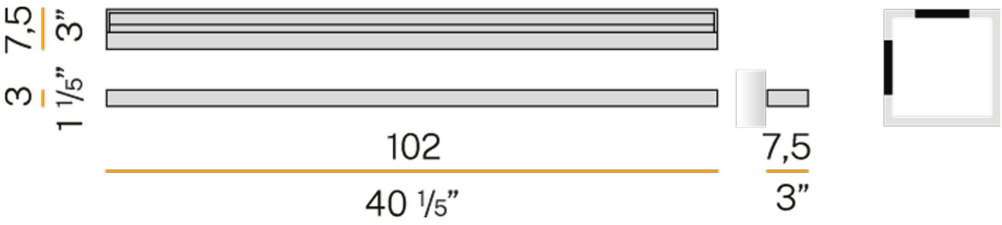

PANZERI

ZERO

220-240V AC ON-OFF

A03501.050.0401

Ceiling or wall lighting fixture for interiors, with direct and indirect light emission. Pickled sheet metal structure in white, bronze or matt brass polyacrylic paint, or with gold leaf coating, or in polished stainless steel. Specular aluminium reflector. Cover in brass with white, bronze or matt brass polyacrylic paint, or with gold leaf coating, or with galvanic chrome plating. Extruded polycarbonate diffuser with opaline finish.



Data sheet

CODE	A03501.050.0401
SYSTEM POWER CONSUMPTION	11W
EFFICACY	55.73lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	990lm
LUMEN OUTPUT	613lm
EFFICIENCY	61.919%
WEIGHT	1,3650Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	
PACKING DIMENSIONS (CM)	10 x 84 x 7

Finish

White



Technical drawing

