

PANZERI

ZERO SQUARE

24V DC
M03201.075.0510



Single or multiple suspension lighting fixture for interiors, with direct and indirect light emission.
Bended extruded aluminium structure in white, black, bronze, matt brass or titanium polyacrylic paint.
Extruded polycarbonate diffuser with opaline finish.
Suspension kit with griplocks and 5m (196,9") long steel cables.
5m (196,9") long power cable in transparent PVC.
Provided without power canopy.

Data sheet


CODE	M03201.075.0510
SYSTEM POWER CONSUMPTION	34W
EFFICACY	89.97lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	24V DC
FREQUENCY	
ELECTRICAL CONFIGURATION	
DRIVER	Remote Not Included
NOMINAL LUMINOUS FLUX	4252lm
LUMEN OUTPUT	3059lm
EFFICIENCY	71.943%
WEIGHT	1,2100Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	6 x 80 x 80

Finish

White 



Technical drawing

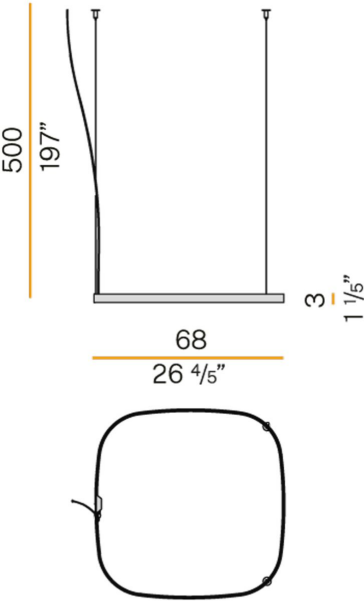

PANZERI

ZERO SQUARE

24V DC
M03201.050.0510



Single or multiple suspension lighting fixture for interiors, with direct and indirect light emission.
Bended extruded aluminium structure in white, black, bronze, matt brass or titanium polyacrylic paint.
Extruded polycarbonate diffuser with opaline finish.
Suspension kit with griplocks and 5m (196,9") long steel cables.
5m (196,9") long power cable in transparent PVC.
Provided without power canopy.

Data sheet

CODE	M03201.050.0510
SYSTEM POWER CONSUMPTION	25W
EFFICACY	81.56lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	24V DC
FREQUENCY	
ELECTRICAL CONFIGURATION	
DRIVER	Remote Not Included
NOMINAL LUMINOUS FLUX	2835lm
LUMEN OUTPUT	2039lm
EFFICIENCY	71.922%
WEIGHT	0,9500Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	8 x 56 x 56

Finish

White



Technical drawing

