


PANZERI

GOLDEN RING

220-240V AC dimmable (DALI/Push DIM)
L08101.300.0402

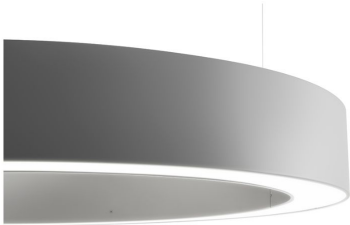

Suspension lighting fixture for interiors, with direct and indirect light emission.
Pickled sheet metal structure in polyacrylic paint.
Aluminium dissipation plates.
Aluminium and pickled sheet metal covers in white or black polyacrylic paint, or with gold leaf coating.
Diffusers in modelled polycarbonate with opaline finish.
Suspension kit with griplocks and 5m (196,9") long steel cables.
5m (196,9") long power cable in transparent PVC.
Power canopy with galvanized sheet metal ceiling bracket and pickled sheet metal covering in white or black polyacrylic paint, or with gold leaf coating.

Data sheet


CODE	L08101.300.0402
SYSTEM POWER CONSUMPTION	370W
EFFICACY	70.72lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	Dimmable (DALI/Push DIM)
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	52387lm
LUMEN OUTPUT	26166lm
EFFICIENCY	49.948%
WEIGHT	41,4800Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	312 x 40 x 180

Finish

White




Technical drawing

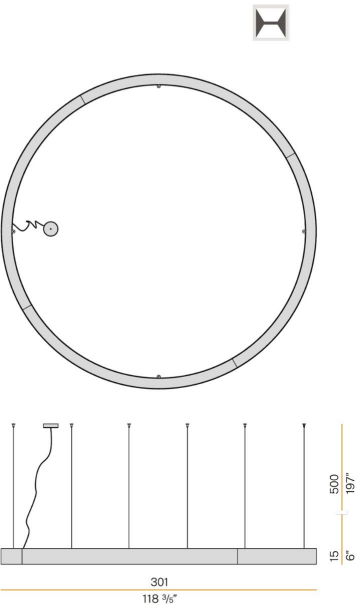

Accessories / canopy

M8101-6


Canopy for power supply and to join 6 steel cables.

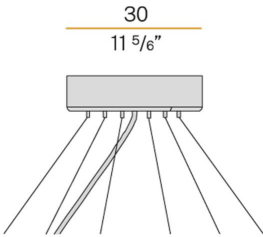

PANZERI

GOLDEN RING

220-240V AC dimmable (DALI/Push DIM)
L08101.120.0402

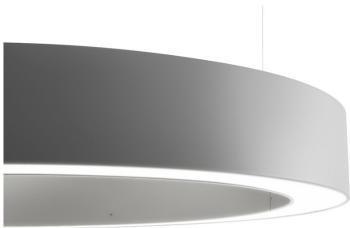

Suspension lighting fixture for interiors, with direct and indirect light emission.
Pickled sheet metal structure in polyacrylic paint.
Aluminium dissipation plates.
Aluminium and pickled sheet metal covers in white or black polyacrylic paint, or with gold leaf coating.
Diffusers in modelled polycarbonate with opaline finish.
Suspension kit with griplocks and 5m (196,9") long steel cables.
5m (196,9") long power cable in transparent PVC.
Power canopy with galvanized sheet metal ceiling bracket and pickled sheet metal covering in white or black polyacrylic paint, or with gold leaf coating.

Data sheet


CODE	L08101.120.0402
SYSTEM POWER CONSUMPTION	150W
EFFICACY	69.77lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	Dimmable (DALI/Push DIM)
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	20955lm
LUMEN OUTPUT	10466lm
EFFICIENCY	49.945%
WEIGHT	15,2700Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	136 x 25 x 136

Finish

White



Technical drawing

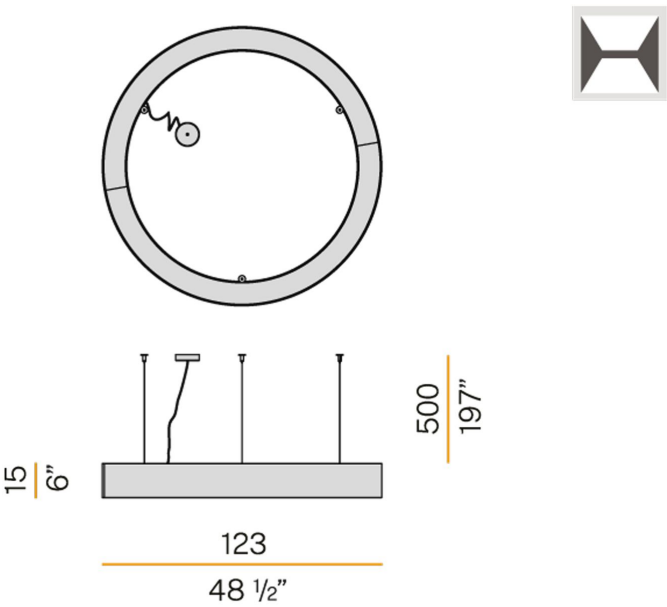

Accessories / canopy

M8101-3

Canopy for power supply and to join 3 steel cables.

