

863V

(for glass tops)

455




Ø315

865V

(for glass tops)

705



Ø400


868

(luminous)

1060



Ø420



Ø600

(Only for 863V)

Ø700

(Only for 868)

Ø800


(Only for 865V)



600x600

(Only for 868)

866
(with ballast)




Ø1100





900x900

869
(to be filled)

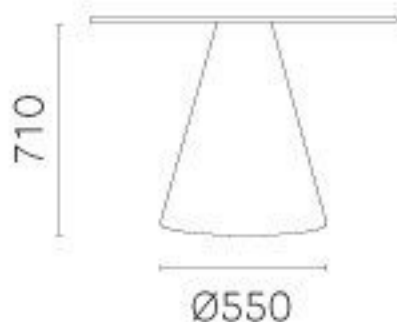

869/2
(to be filled.
For tops thickness
up to 20mm)

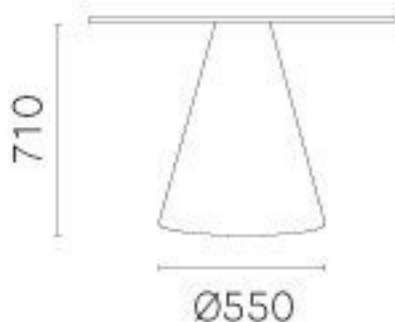

For 869
Ø1800
thickness 30mm

For 869/2

HPL: Ø1290÷1590

LAM: Ø1300÷1800