

MAGO R

Mago R is a linear 24VDC LED system for interior applications.

White varnished aluminum profile available in three different

lengths. Opal protection screen to uniform lighting and two colour

temperatures. Ceiling, recessed and suspension versions are available.

On request: customized lengths, tunable white, RGB and RGBW.



RECESSED | 3000K - 1M

LAMPING

Source	Linear LED
Total power	17W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Luminous flux	1400lm
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM < 3
Typ cri	> 80
Energy class	A+
Ip class	40
Dimensions	96x4,3x4,2cm
Materials	Aluminum + polycarbonate
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Lengths, Colour temperatures
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	1,2 kg

Codes

MMAG0110G15WBO

Structure

white

PACKAGE


Package 01

Dimension: 196x4,3x4,2 cm / Gross weight: 2,4 kg


Certificazioni




RECESSED



CEILING



SUSPENSION

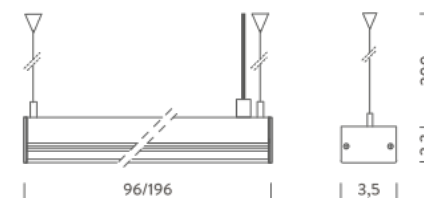

RECESSED | 3000K - 2M

LAMPING

Source	Linear LED
Total power	34W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM < 3
Typ cri	> 80
Energy class	A+
Ip class	40
Dimensions	196x4,3x4,2cm
Materials	Aluminum + polycarbonate
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Lengths, Colour temperatures
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	2,4 kg

Codes

MMAG0120G15WBO


Structure

white

PACKAGE

Package 01	Dimension: 296x4,3x4,2 cm / Gross weight: 3,6 kg
------------	--

Certificazioni

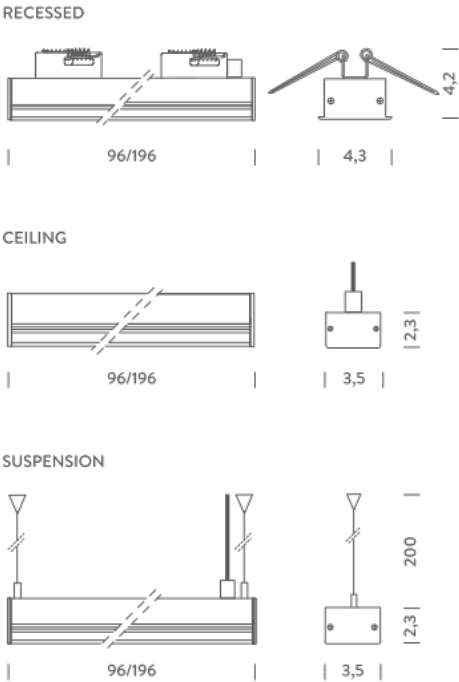

RECESSED | 3000K - 3M

LAMPING

Source	Linear LED
Total power	50W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM < 3
Typ cri	> 80
Energy class	A+
Ip class	40
Dimensions	296x4,3x4,2cm
Materials	Aluminum + polycarbonate
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Lengths, Colour temperatures
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	3,6 kg

Codes

MMAG0130G15WBO

Structure

white


PACKAGE

Package 01 Dimension: 96x4,3x4,2 cm / Gross weight: 1,21 kg


Certificazioni




RECESSED



CEILING



SUSPENSION

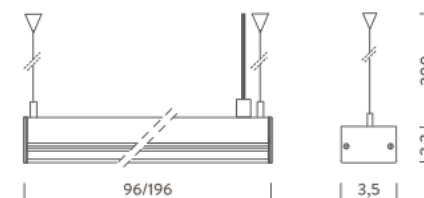

RECESSED | 4000K - 1M

LAMPING

Source	Linear LED
Total power	17W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM < 3
Typ cri	> 80
Energy class	A+
Ip class	40
Dimensions	96x4,3x4,2cm
Materials	Aluminum + polycarbonate
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Lengths, Colour temperatures
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	1,2 kg

Codes

MMAG0110G15NBO


Structure

white

PACKAGE

Package 01 Dimension: 196x4,3x4,2 cm / Gross weight: 2,4 kg

Certificazioni

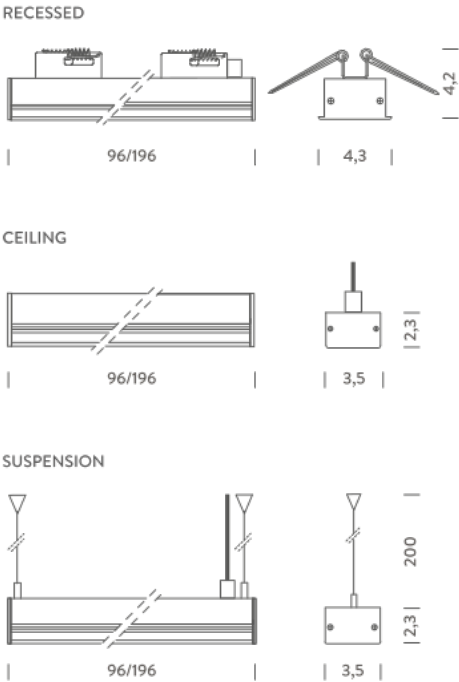

RECESSED | 4000K - 2M

LAMPING

Source	Linear LED
Total power	34W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM < 3
Typ cri	> 80
Energy class	A+
Ip class	40
Dimensions	196x4,3x4,2cm
Materials	Aluminum + polycarbonate
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Lengths, Colour temperatures
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	2,4 kg

Codes

MMAG0120G15NBO

Structure

white


PACKAGE

Package 01 Dimension: 296x4,3x4,2 cm / Gross weight: 3,6 kg


Certificazioni




RECESSED



CEILING

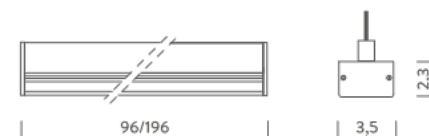

SUSPENSION

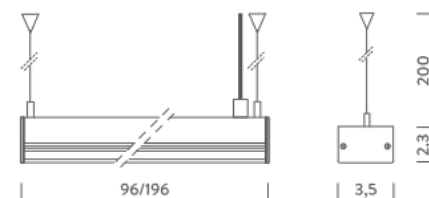

RECESSED | 4000K - 3M

LAMPING

Source	Linear LED
Total power	50W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM < 3
Typ cri	> 80
Energy class	A+
Ip class	40
Dimensions	296x4,3x4,2cm
Materials	Aluminum + polycarbonate
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Lengths, Colour temperatures
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	3,6 kg

Codes

MMAG0130G15NBO

Structure

white


PACKAGE

Package 01 Dimension: 96x3,5x2,3 cm / Gross weight: 1,21 kg


Certificazioni




RECESSED

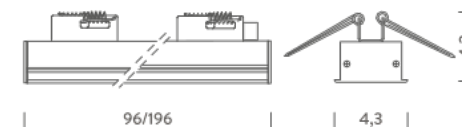

CEILING

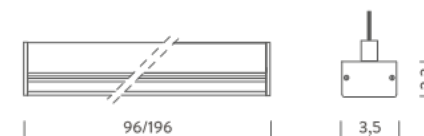

SUSPENSION

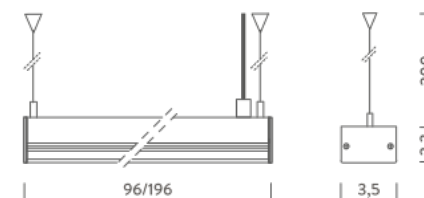

CEILING | 3000K - 1M

LAMPING

Source	Linear LED
Total power	17W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Luminous flux	1400lm
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM < 3
Typ cri	> 80
Energy class	A+
Ip class	40
Dimensions	96x3,5x2,3cm
Materials	Aluminum + polycarbonate
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Lengths, Colour temperatures
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	1,2 kg

Codes

MMAG0410G15WBO

Structure

white

PACKAGE


Package 01

Dimension: 196x3,5x2,3 cm / Gross weight: 2,4 kg


Certificazioni




RECESSED

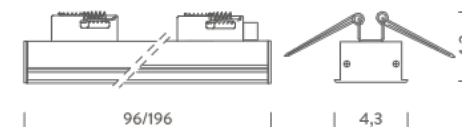

CEILING



SUSPENSION

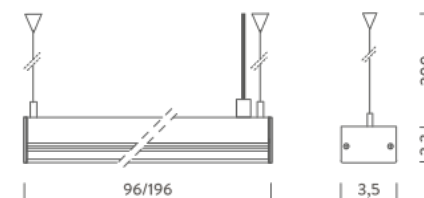

CEILING | 3000K - 2M

LAMPING

Source	Linear LED
Total power	34W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM < 3
Typ cri	> 80
Energy class	A+
Ip class	40
Dimensions	196x3,5x2,3cm
Materials	Aluminum + polycarbonate
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Lengths, Colour temperatures
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	2,4 kg

Codes

MMAG0410G15NBO

Structure

white


PACKAGE

Package 01 Dimension: 96x3,5x2,3 cm / Gross weight: 1,21 kg


Certificazioni




RECESSED

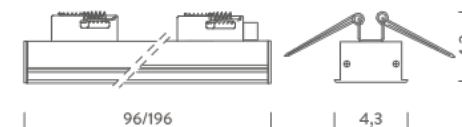

CEILING

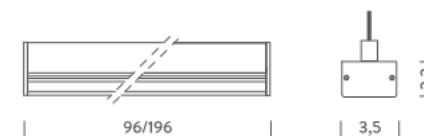

SUSPENSION

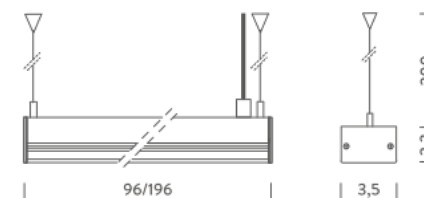

CEILING | 4000K - 1M

LAMPING

Source	Linear LED
Total power	17W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM < 3
Typ cri	> 80
Energy class	A+
Ip class	40
Dimensions	96x3,5x2,3cm
Materials	Aluminum + polycarbonate
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Lengths, Colour temperatures
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	1,2 kg

Codes

MMAG0420G15WBO

Structure

white


PACKAGE

Package 01 Dimension: 196x3,5x2,3 cm / Gross weight: 2,4 kg


Certificazioni




RECESSED

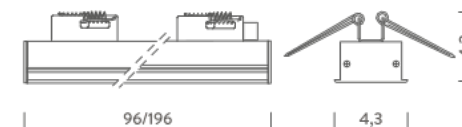

CEILING

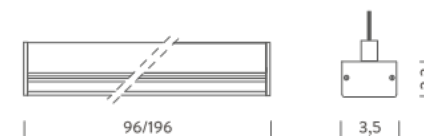

SUSPENSION

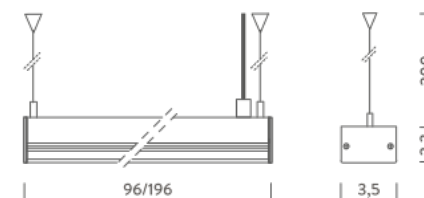

CEILING | 4000K - 2M

LAMPING

Source	Linear LED
Total power	34W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM < 3
Typ cri	> 80
Energy class	A+
Ip class	40
Dimensions	196x3,5x2,3cm
Materials	Aluminum + polycarbonate
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Lengths, Colour temperatures
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	2,4 kg

Codes

MMAG0420G15NBO

Structure

white


PACKAGE

Package 01 Dimension: 96x3,5x2,3 cm / Gross weight: 1,21 kg


Certificazioni




RECESSED

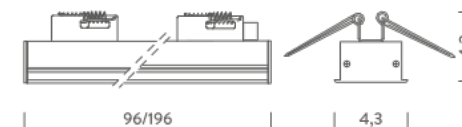

CEILING

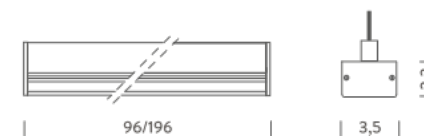

SUSPENSION

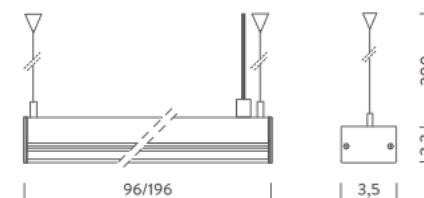

PENDANT | 3000K - 1M

LAMPING

Source	Linear LED
Total power	17W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Luminous flux	1400lm
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM < 3
Typ cri	> 80
Energy class	A+
Ip class	40
Dimensions	96x3,5x2,3cm
Materials	Aluminum + polycarbonate
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Lengths, Colour temperatures
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	1,2 kg

Codes

MMAG0310G15WBO

Structure

white

PACKAGE


Package 01

Dimension: 196x3,5x2,3 cm / Gross weight: 2,4 kg


Certificazioni




RECESSED

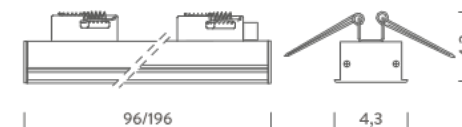

CEILING



SUSPENSION

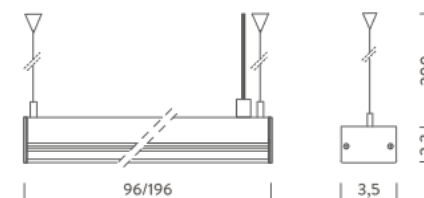

PENDANT | 3000K - 2M

LAMPING

Source	Linear LED
Total power	34W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM < 3
Typ cri	> 80
Energy class	A+
Ip class	40
Dimensions	296x3,5x2,3cm
Materials	Aluminum + polycarbonate
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Lengths, Colour temperatures
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	2,4 kg

Codes

MMAG0320G15WBO


Structure

white

PACKAGE

Package 01	Dimension: 296x3,5x2,3 cm / Gross weight: 3,6 kg
------------	--

Certificazioni

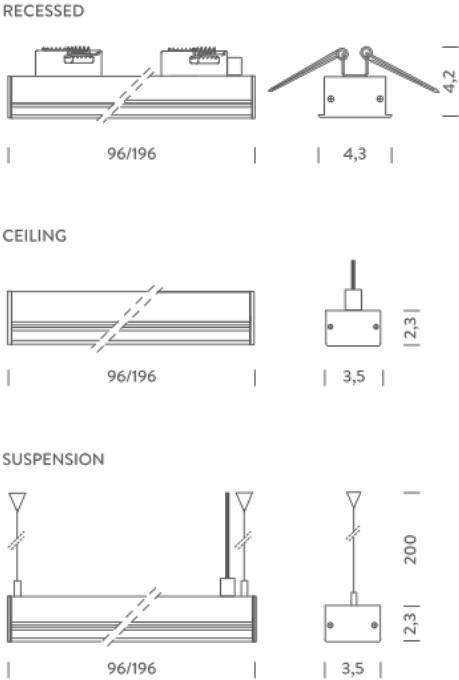

PENDANT | 3000K - 3M

LAMPING

Source	Linear LED
Total power	50W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM < 3
Typ cri	> 80
Energy class	A+
Ip class	40
Dimensions	196x3,5x2,3cm
Materials	Aluminum + polycarbonate
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Lengths, Colour temperatures
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	3,6 kg

Codes

MMAG0330G15WBO

Structure

white


PACKAGE

Package 01 Dimension: 96x3,5x2,3 cm / Gross weight: 1,21 kg


Certificazioni




RECESSED

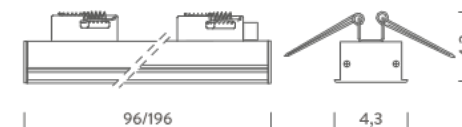

CEILING



SUSPENSION

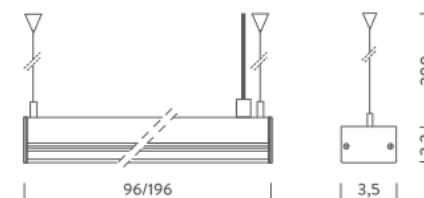

PENDANT | 4000K - 1M

LAMPING

Source	Linear LED
Total power	17W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM < 3
Typ cri	> 80
Energy class	A+
Ip class	40
Dimensions	96x3,5x2,3cm
Materials	Aluminum + polycarbonate
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Lengths, Colour temperatures
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	1,2 kg

Codes

MMAG0310G15NBO


Structure

white

PACKAGE

Package 01	Dimension: 196x3,5x2,3 cm / Gross weight: 2,4 kg
------------	--

Certificazioni

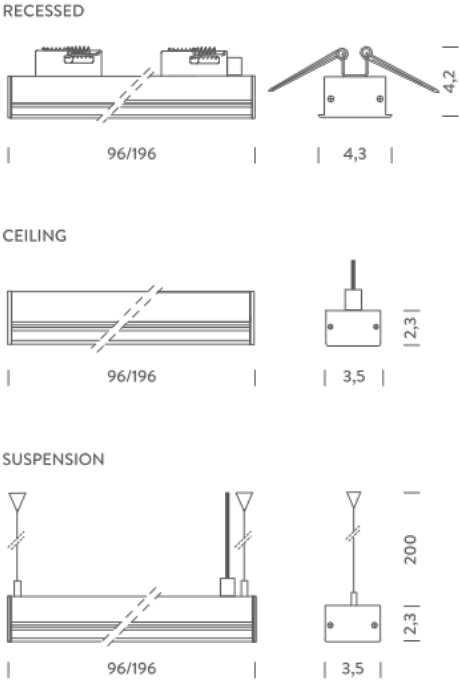

PENDANT | 4000K - 2M

LAMPING

Source	Linear LED
Total power	34W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM < 3
Typ cri	> 80
Energy class	A+
Ip class	40
Dimensions	196x3,5x2,3cm
Materials	Aluminum + polycarbonate
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	2,4 kg

Codes

MMAG0320G15NBO


Structure

white

PACKAGE

Package 01	Dimension: 296x3,5x2,3 cm / Gross weight: 3,6 kg
------------	--

Certificazioni

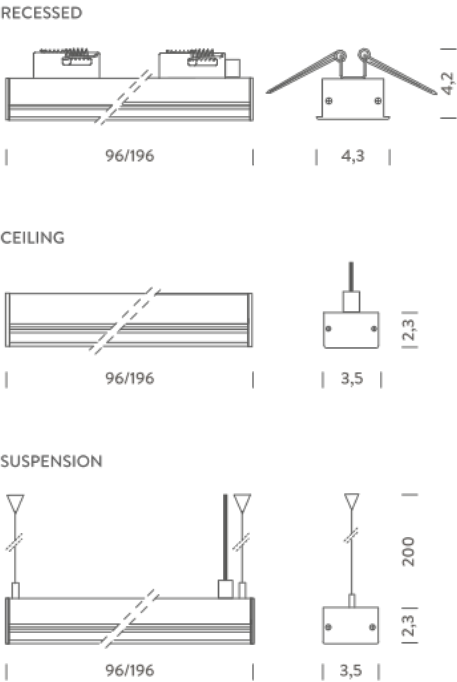

PENDANT | 4000K - 3M

LAMPING

Source	Linear LED
Total power	50W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Initial luminaire efficacy	> 45lm/W
Initial chromaticity	SDCM < 3
Typ cri	> 80
Energy class	A+
Ip class	40
Dimensions	296x3,5x2,3cm
Materials	Aluminum + polycarbonate
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	3,6 kg

Codes

MMAG0330G15NBO

Structure

white

PACKAGE

Package 01	Dimension: 100x5x5 cm / Gross weight: 0,3 kg
------------	--

Certificazioni

