

# MINIFLUX TRANSPARENT

MINIFLUX is a modular LED system for indoor / outdoor suitable for cornice, decorative and accent lighting.

High-emission LED strip (24V DC) installed in an aluminium profile.

Clear polycarbonate diffuser.

Installation is realised through transparent polycarbonate clips that are adjusted for the customer's needs.

Miniflux can be supplied in numerous lengths and colour temperatures.

Tube diameter dimensions depend on the lamp's luminous flux.

LED driver not included.



## 1M | 2700K HP

### LAMPING

|                                   |                                                                                                            |
|-----------------------------------|------------------------------------------------------------------------------------------------------------|
| Source                            | Linear LED                                                                                                 |
| Total power                       | 16W                                                                                                        |
| Emission                          | Direct 120°                                                                                                |
| Tension                           | 24VDC                                                                                                      |
| Color temperature                 | 2700K                                                                                                      |
| Initial luminaire efficacy        | > 90lm/W                                                                                                   |
| Initial chromaticity              | SDCM < 3                                                                                                   |
| Typ cri                           | 80                                                                                                         |
| Energy class                      | A+                                                                                                         |
| Ip class                          | 65                                                                                                         |
| Dimensions                        | ø1,6x104cm                                                                                                 |
| Materials                         | Polycarbonate                                                                                              |
| Ambient temperature range         | - 20°C / 50°                                                                                               |
| Performance ambient temperature   | 25°                                                                                                        |
| Mechanical impact protection code | IK08                                                                                                       |
| Notes                             | compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included                              |
| Customization options             | Lengths                                                                                                    |
| Accessories                       | Connectors kit IP68,   Drivers 24VDC + DALI interface,   Miniflux accessories, joint, PG, feeding, end-cap |
| Net lamp weight                   | 0,31 kg                                                                                                    |

### Codes

BBOK0910007DPC

### Structure


transparent

### PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,5 kg

### Certificazioni

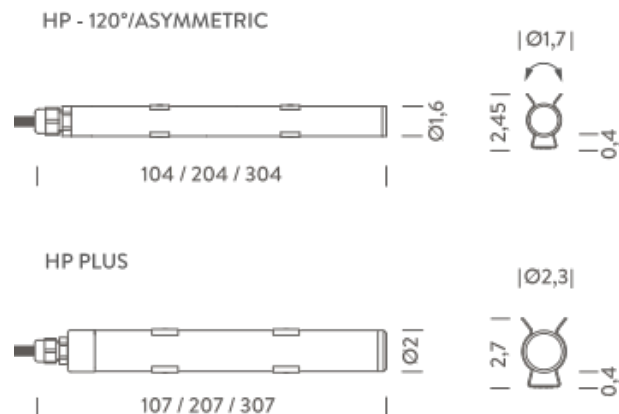

## 1M | 3000K HP

### LAMPING

|                                   |                                                                                                            |
|-----------------------------------|------------------------------------------------------------------------------------------------------------|
| Source                            | Linear LED                                                                                                 |
| Total power                       | 16W                                                                                                        |
| Emission                          | Direct 120°                                                                                                |
| Tension                           | 24VDC                                                                                                      |
| Color temperature                 | 3000K                                                                                                      |
| Luminous flux                     | 1486lm                                                                                                     |
| Initial luminaire efficacy        | > 90lm/W                                                                                                   |
| Initial chromaticity              | SDCM < 3                                                                                                   |
| Typ cri                           | 80                                                                                                         |
| Energy class                      | A+                                                                                                         |
| Ip class                          | 65                                                                                                         |
| Dimensions                        | ø1,6x104cm                                                                                                 |
| Materials                         | Polycarbonate                                                                                              |
| Ambient temperature range         | - 20°C / 50°                                                                                               |
| Performance ambient temperature   | 25°                                                                                                        |
| Mechanical impact protection code | IK08                                                                                                       |
| Notes                             | compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included                              |
| Customization options             | Lengths                                                                                                    |
| Accessories                       | Connectors kit IP68,   Drivers 24VDC + DALI interface,   Miniflux accessories, joint, PG, feeding, end-cap |
| Net lamp weight                   | 0,31 kg                                                                                                    |

### Codes

BBOK0910007WPC

### Structure

transparent

### PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,5 kg

### Certificazioni




NEMO  
STUDIO

HP - 120°/ASYMMETRIC



HP PLUS

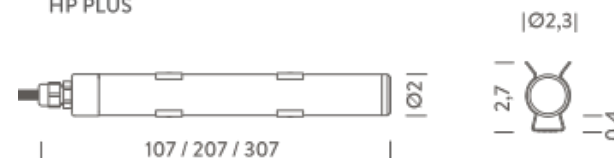

## 1M | 3000K HP - ASYMMETRIC

### LAMPING

|                                   |                                                                                                            |
|-----------------------------------|------------------------------------------------------------------------------------------------------------|
| Source                            | Linear LED                                                                                                 |
| Total power                       | 16W                                                                                                        |
| Emission                          | Direct asymmetric                                                                                          |
| Tension                           | 24VDC                                                                                                      |
| Color temperature                 | 3000K                                                                                                      |
| Initial luminaire efficacy        | > 90lm/W                                                                                                   |
| Initial chromaticity              | SDCM < 3                                                                                                   |
| Typ cri                           | 80                                                                                                         |
| Energy class                      | A+                                                                                                         |
| Ip class                          | 65                                                                                                         |
| Dimensions                        | ø2x107cm                                                                                                   |
| Materials                         | Polycarbonate                                                                                              |
| Ambient temperature range         | - 20°C / 50°                                                                                               |
| Performance ambient temperature   | 25°                                                                                                        |
| Mechanical impact protection code | IK08                                                                                                       |
| Notes                             | compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included                              |
| Customization options             | Lengths                                                                                                    |
| Accessories                       | Connectors kit IP68,   Drivers 24VDC + DALI interface,   Miniflux accessories, joint, PG, feeding, end-cap |
| Net lamp weight                   | 0,31 kg                                                                                                    |

### Codes

BBOK0910207WPC

### Structure


transparent

### PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,5 kg

### Certificazioni

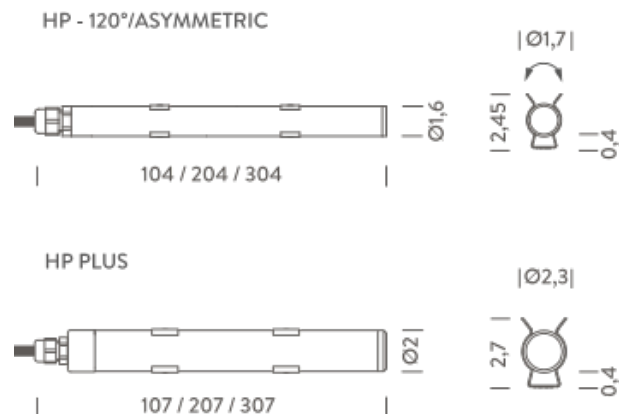

## 1M | 4000K HP

### LAMPING

|                                   |                                                                                                            |
|-----------------------------------|------------------------------------------------------------------------------------------------------------|
| Source                            | Linear LED                                                                                                 |
| Total power                       | 16W                                                                                                        |
| Emission                          | Direct 120°                                                                                                |
| Tension                           | 24VDC                                                                                                      |
| Color temperature                 | 4000K                                                                                                      |
| Luminous flux                     | 1512lm                                                                                                     |
| Initial luminaire efficacy        | > 90lm/W                                                                                                   |
| Initial chromaticity              | SDCM < 3                                                                                                   |
| Typ cri                           | 80                                                                                                         |
| Energy class                      | A+                                                                                                         |
| Ip class                          | 65                                                                                                         |
| Dimensions                        | ø1,6x104cm                                                                                                 |
| Materials                         | Polycarbonate                                                                                              |
| Ambient temperature range         | - 20°C / 50°                                                                                               |
| Performance ambient temperature   | 25°                                                                                                        |
| Mechanical impact protection code | IK08                                                                                                       |
| Notes                             | compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included                              |
| Customization options             | Lengths                                                                                                    |
| Accessories                       | Connectors kit IP68,   Drivers 24VDC + DALI interface,   Miniflux accessories, joint, PG, feeding, end-cap |
| Net lamp weight                   | 0,31 kg                                                                                                    |

### Codes

BBOK0910007NPC

### Structure

transparent

### PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,5 kg

### Certificazioni




NEMO  
STUDIO

HP - 120°/ASYMMETRIC



HP PLUS

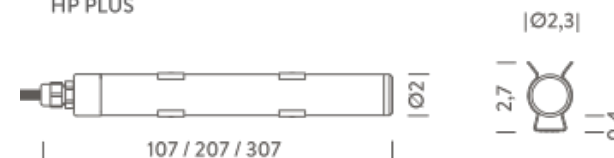

# 1M | 4000K HP - ASYMMETRIC

## LAMPING

|                                   |                                                                                                            |
|-----------------------------------|------------------------------------------------------------------------------------------------------------|
| Source                            | Linear LED                                                                                                 |
| Total power                       | 16W                                                                                                        |
| Emission                          | Direct asymmetric                                                                                          |
| Tension                           | 24VDC                                                                                                      |
| Color temperature                 | 4000K                                                                                                      |
| Luminous flux                     | 1386lm                                                                                                     |
| Initial luminaire efficacy        | > 90lm/W                                                                                                   |
| Initial chromaticity              | SDCM < 3                                                                                                   |
| Typ cri                           | 80                                                                                                         |
| Energy class                      | A+                                                                                                         |
| Ip class                          | 65                                                                                                         |
| Dimensions                        | ø2x107cm                                                                                                   |
| Materials                         | Polycarbonate                                                                                              |
| Ambient temperature range         | - 20°C / 50°                                                                                               |
| Performance ambient temperature   | 25°                                                                                                        |
| Mechanical impact protection code | IK08                                                                                                       |
| Notes                             | compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included                              |
| Customization options             | Lengths                                                                                                    |
| Accessories                       | Connectors kit IP68,   Drivers 24VDC + DALI interface,   Miniflux accessories, joint, PG, feeding, end-cap |
| Net lamp weight                   | 0,31 kg                                                                                                    |

**Codes**  
BBOK0910207NPC

**PACKAGE**  
Package 01


## Certificazioni



NEMO STUDIO

**Structure**  
transparent

Dimension: 120x8,5x4 cm / Gross weight: 0,5 kg

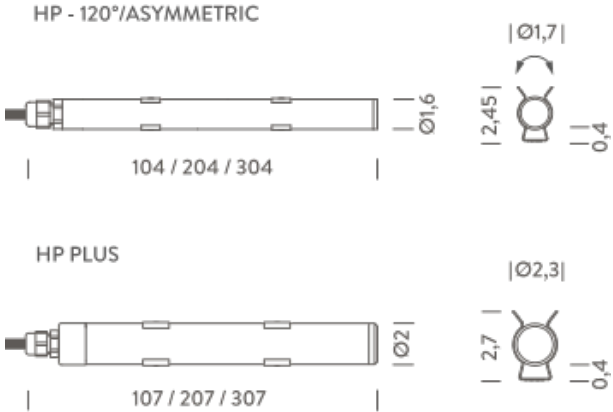

## 2M | 2700K HP

### LAMPING

|                                   |                                                                                                            |
|-----------------------------------|------------------------------------------------------------------------------------------------------------|
| Source                            | Linear LED                                                                                                 |
| Total power                       | 32W                                                                                                        |
| Emission                          | Direct 120°                                                                                                |
| Tension                           | 24VDC                                                                                                      |
| Color temperature                 | 2700K                                                                                                      |
| Initial luminaire efficacy        | > 90lm/W                                                                                                   |
| Initial chromaticity              | SDCM < 3                                                                                                   |
| Typ cri                           | 80                                                                                                         |
| Energy class                      | A+                                                                                                         |
| Ip class                          | 65                                                                                                         |
| Dimensions                        | ø1,6x204cm                                                                                                 |
| Materials                         | Polycarbonate                                                                                              |
| Ambient temperature range         | - 20°C / 50°                                                                                               |
| Performance ambient temperature   | 25°                                                                                                        |
| Mechanical impact protection code | IK08                                                                                                       |
| Notes                             | compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included                              |
| Customization options             | Lengths                                                                                                    |
| Accessories                       | Connectors kit IP68,   Drivers 24VDC + DALI interface,   Miniflux accessories, joint, PG, feeding, end-cap |
| Net lamp weight                   | 0,49 kg                                                                                                    |

### Codes

BBOK0920007DPC

### Structure


transparent

### PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,72 kg

### Certificazioni

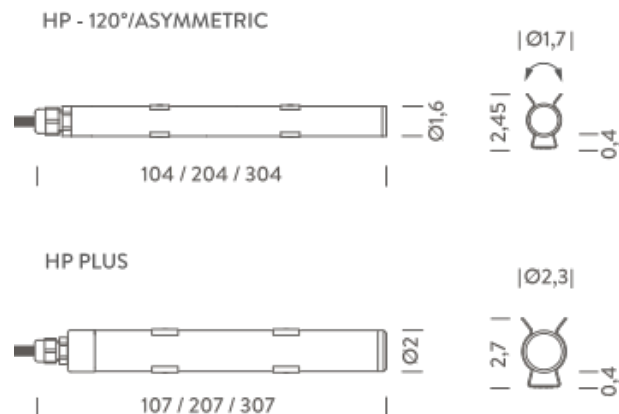

2M | 3000K HP

LAMPING

|                                   |                                                                                                            |
|-----------------------------------|------------------------------------------------------------------------------------------------------------|
| Source                            | Linear LED                                                                                                 |
| Total power                       | 32W                                                                                                        |
| Emission                          | Direct 120°                                                                                                |
| Tension                           | 24VDC                                                                                                      |
| Color temperature                 | 3000K                                                                                                      |
| Luminous flux                     | 2972lm                                                                                                     |
| Initial luminaire efficacy        | > 90lm/W                                                                                                   |
| Initial chromaticity              | SDCM < 3                                                                                                   |
| Typ cri                           | 80                                                                                                         |
| Energy class                      | A+                                                                                                         |
| Ip class                          | 65                                                                                                         |
| Dimensions                        | ø1,6x204cm                                                                                                 |
| Materials                         | Polycarbonate                                                                                              |
| Ambient temperature range         | - 20°C / 50°                                                                                               |
| Performance ambient temperature   | 25°                                                                                                        |
| Mechanical impact protection code | IK08                                                                                                       |
| Notes                             | compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included                              |
| Customization options             | Lengths                                                                                                    |
| Accessories                       | Connectors kit IP68,   Drivers 24VDC + DALI interface,   Miniflux accessories, joint, PG, feeding, end-cap |
| Net lamp weight                   | 0,49 kg                                                                                                    |

Codes  
BBOK0920007WPC


PACKAGE

Package 01  
Dimension: 220x8,5x4 cm / Gross weight: 0,72 kg

Certificazioni



NEMO  
STUDIO

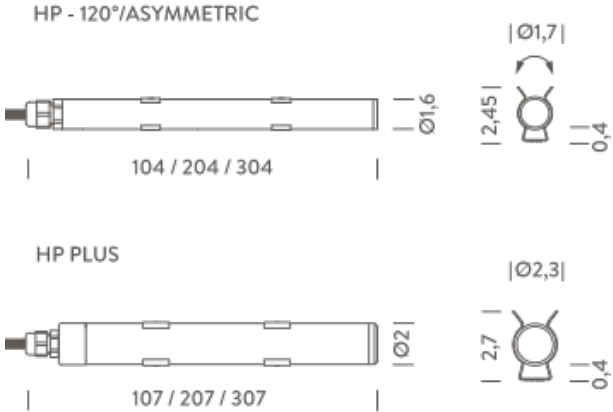



# 2M | 3000K HP - ASYMMETRIC

## LAMPING

|                                   |                                                                                                            |
|-----------------------------------|------------------------------------------------------------------------------------------------------------|
| Source                            | Linear LED                                                                                                 |
| Total power                       | 32W                                                                                                        |
| Emission                          | Direct asymmetric                                                                                          |
| Tension                           | 24VDC                                                                                                      |
| Color temperature                 | 3000K                                                                                                      |
| Initial luminaire efficacy        | > 90lm/W                                                                                                   |
| Initial chromaticity              | SDCM < 3                                                                                                   |
| Typ cri                           | 80                                                                                                         |
| Energy class                      | A+                                                                                                         |
| Ip class                          | 65                                                                                                         |
| Dimensions                        | ø2x207cm                                                                                                   |
| Materials                         | Polycarbonate                                                                                              |
| Ambient temperature range         | - 20°C / 50°                                                                                               |
| Performance ambient temperature   | 25°                                                                                                        |
| Mechanical impact protection code | IK08                                                                                                       |
| Notes                             | compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included                              |
| Customization options             | Lengths                                                                                                    |
| Accessories                       | Connectors kit IP68,   Drivers 24VDC + DALI interface,   Miniflux accessories, joint, PG, feeding, end-cap |
| Net lamp weight                   | 0,49 kg                                                                                                    |

## Codes

BBOK0920207WPC


## Structure

transparent

## PACKAGE

Package 01      Dimension: 220x8,5x4 cm / Gross weight: 0,72 kg

## Certificazioni

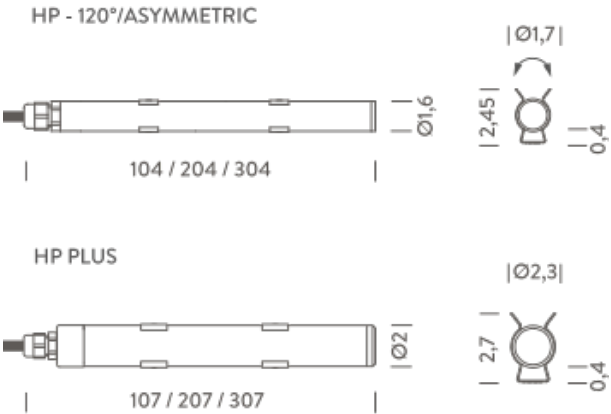

## 2M | 4000K HP

### LAMPING

|                                   |                                                                                                            |
|-----------------------------------|------------------------------------------------------------------------------------------------------------|
| Source                            | Linear LED                                                                                                 |
| Total power                       | 32W                                                                                                        |
| Emission                          | Direct 120°                                                                                                |
| Tension                           | 24VDC                                                                                                      |
| Color temperature                 | 4000K                                                                                                      |
| Luminous flux                     | 3024lm                                                                                                     |
| Initial luminaire efficacy        | > 90lm/W                                                                                                   |
| Initial chromaticity              | SDCM < 3                                                                                                   |
| Typ cri                           | 80                                                                                                         |
| Energy class                      | A+                                                                                                         |
| Ip class                          | 65                                                                                                         |
| Dimensions                        | ø1,6x204cm                                                                                                 |
| Materials                         | Polycarbonate                                                                                              |
| Ambient temperature range         | - 20°C / 50°                                                                                               |
| Performance ambient temperature   | 25°                                                                                                        |
| Mechanical impact protection code | IK08                                                                                                       |
| Notes                             | compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included                              |
| Customization options             | Lengths                                                                                                    |
| Accessories                       | Connectors kit IP68,   Drivers 24VDC + DALI interface,   Miniflux accessories, joint, PG, feeding, end-cap |
| Net lamp weight                   | 0,49 kg                                                                                                    |

### Codes

BBOK0920007NPC

### Structure

transparent

### PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,72 kg

### Certificazioni




NEMO  
STUDIO

HP - 120°/ASYMMETRIC



HP PLUS

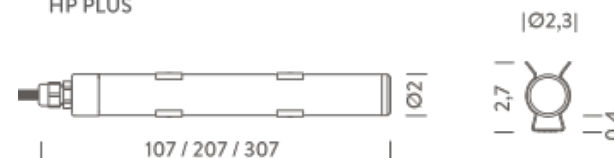

# 2M | 4000K HP - ASYMMETRIC

## LAMPING

|                                   |                                                                                                            |
|-----------------------------------|------------------------------------------------------------------------------------------------------------|
| Source                            | Linear LED                                                                                                 |
| Total power                       | 32W                                                                                                        |
| Emission                          | Direct asymmetric                                                                                          |
| Tension                           | 24VDC                                                                                                      |
| Color temperature                 | 4000K                                                                                                      |
| Luminous flux                     | 2772lm                                                                                                     |
| Initial luminaire efficacy        | > 90lm/W                                                                                                   |
| Initial chromaticity              | SDCM < 3                                                                                                   |
| Typ cri                           | 80                                                                                                         |
| Energy class                      | A+                                                                                                         |
| Ip class                          | 65                                                                                                         |
| Dimensions                        | ø2x207cm                                                                                                   |
| Materials                         | Polycarbonate                                                                                              |
| Ambient temperature range         | - 20°C / 50°                                                                                               |
| Performance ambient temperature   | 25°                                                                                                        |
| Mechanical impact protection code | IK08                                                                                                       |
| Notes                             | compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included                              |
| Customization options             | Lengths                                                                                                    |
| Accessories                       | Connectors kit IP68,   Drivers 24VDC + DALI interface,   Miniflux accessories, joint, PG, feeding, end-cap |
| Net lamp weight                   | 0,49 kg                                                                                                    |

## Codes

BBOK0920207NPC

## Structure

transparent

## PACKAGE


Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,72 kg

## Certificazioni



NEMO STUDIO

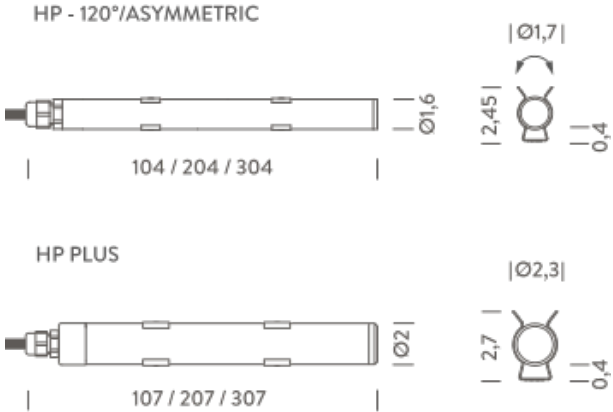

## 3M | 2700K HP

### LAMPING

|                                   |                                                                                                            |
|-----------------------------------|------------------------------------------------------------------------------------------------------------|
| Source                            | Linear LED                                                                                                 |
| Total power                       | 48W                                                                                                        |
| Emission                          | Direct 120°                                                                                                |
| Tension                           | 24VDC                                                                                                      |
| Color temperature                 | 2700K                                                                                                      |
| Initial luminaire efficacy        | > 90lm/W                                                                                                   |
| Initial chromaticity              | SDCM < 3                                                                                                   |
| Typ cri                           | 80                                                                                                         |
| Energy class                      | A+                                                                                                         |
| Ip class                          | 65                                                                                                         |
| Dimensions                        | ø1,6x304cm                                                                                                 |
| Materials                         | Polycarbonate                                                                                              |
| Ambient temperature range         | - 20°C / 50°                                                                                               |
| Performance ambient temperature   | 25°                                                                                                        |
| Mechanical impact protection code | IK08                                                                                                       |
| Notes                             | compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included                              |
| Customization options             | Lengths                                                                                                    |
| Accessories                       | Connectors kit IP68,   Drivers 24VDC + DALI interface,   Miniflux accessories, joint, PG, feeding, end-cap |
| Net lamp weight                   | 0,72 kg                                                                                                    |

### Codes

BBOK0930007DPC

### Structure


transparent

### PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,31 kg

### Certificazioni

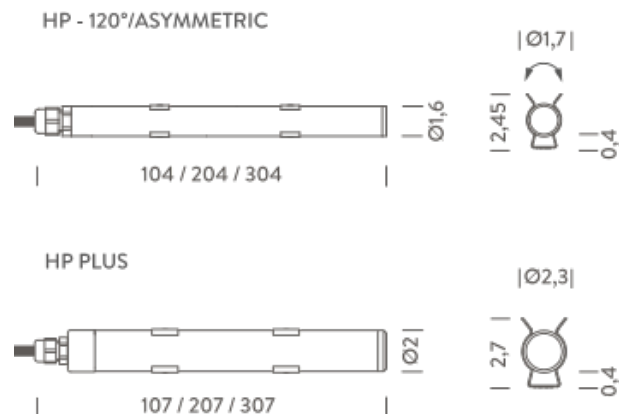

# 3M | 3000K HP

## LAMPING

|                                   |                                                                                                            |
|-----------------------------------|------------------------------------------------------------------------------------------------------------|
| Source                            | Linear LED                                                                                                 |
| Total power                       | 48W                                                                                                        |
| Emission                          | Direct 120°                                                                                                |
| Tension                           | 24VDC                                                                                                      |
| Color temperature                 | 3000K                                                                                                      |
| Luminous flux                     | 4458lm                                                                                                     |
| Initial luminaire efficacy        | > 90lm/W                                                                                                   |
| Initial chromaticity              | SDCM < 3                                                                                                   |
| Typ cri                           | 80                                                                                                         |
| Energy class                      | A+                                                                                                         |
| Ip class                          | 65                                                                                                         |
| Dimensions                        | ø1,6x304cm                                                                                                 |
| Materials                         | Polycarbonate                                                                                              |
| Ambient temperature range         | - 20°C / 50°                                                                                               |
| Performance ambient temperature   | 25°                                                                                                        |
| Mechanical impact protection code | IK08                                                                                                       |
| Notes                             | compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included                              |
| Customization options             | Lengths                                                                                                    |
| Accessories                       | Connectors kit IP68,   Drivers 24VDC + DALI interface,   Miniflux accessories, joint, PG, feeding, end-cap |
| Net lamp weight                   | 0,72 kg                                                                                                    |

**Codes**  
BBOK0930007WPC

**Structure**  
transparent


**PACKAGE**  
Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,31 kg

## Certificazioni



NEMO STUDIO

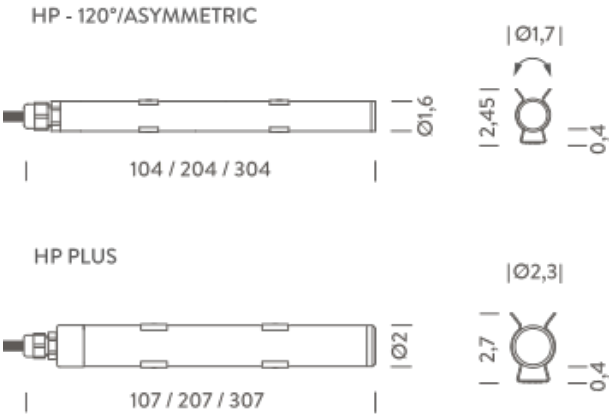

## 3M | 3000K HP - ASYMMETRIC

### LAMPING

|                                   |                                                                                                            |
|-----------------------------------|------------------------------------------------------------------------------------------------------------|
| Source                            | Linear LED                                                                                                 |
| Total power                       | 48W                                                                                                        |
| Emission                          | Direct asymmetric                                                                                          |
| Tension                           | 24VDC                                                                                                      |
| Color temperature                 | 3000K                                                                                                      |
| Initial luminaire efficacy        | > 90lm/W                                                                                                   |
| Initial chromaticity              | SDCM < 3                                                                                                   |
| Typ cri                           | 80                                                                                                         |
| Energy class                      | A+                                                                                                         |
| Ip class                          | 65                                                                                                         |
| Dimensions                        | ø2x307cm                                                                                                   |
| Materials                         | Polycarbonate                                                                                              |
| Ambient temperature range         | - 20°C / 50°                                                                                               |
| Performance ambient temperature   | 25°                                                                                                        |
| Mechanical impact protection code | IK08                                                                                                       |
| Notes                             | compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included                              |
| Customization options             | Lengths                                                                                                    |
| Accessories                       | Connectors kit IP68,   Drivers 24VDC + DALI interface,   Miniflux accessories, joint, PG, feeding, end-cap |
| Net lamp weight                   | 0,72 kg                                                                                                    |

### Codes

BBOK0930207WPC

### Structure


transparent

### PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,31 kg

### Certificazioni

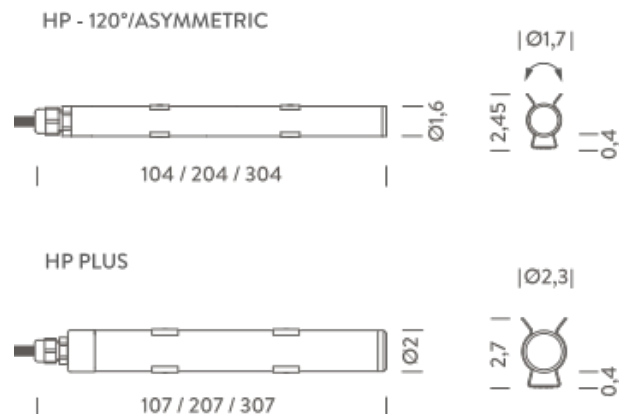

# 3M | 4000K HP

## LAMPING

|                                   |                                                                                                            |
|-----------------------------------|------------------------------------------------------------------------------------------------------------|
| Source                            | Linear LED                                                                                                 |
| Total power                       | 48W                                                                                                        |
| Emission                          | Direct 120°                                                                                                |
| Tension                           | 24VDC                                                                                                      |
| Color temperature                 | 4000K                                                                                                      |
| Luminous flux                     | 4536lm                                                                                                     |
| Initial luminaire efficacy        | > 90lm/W                                                                                                   |
| Initial chromaticity              | SDCM < 3                                                                                                   |
| Typ cri                           | 80                                                                                                         |
| Energy class                      | A+                                                                                                         |
| Ip class                          | 65                                                                                                         |
| Dimensions                        | ø1,6x304cm                                                                                                 |
| Materials                         | Polycarbonate                                                                                              |
| Ambient temperature range         | - 20°C / 50°                                                                                               |
| Performance ambient temperature   | 25°                                                                                                        |
| Mechanical impact protection code | IK08                                                                                                       |
| Notes                             | compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included                              |
| Customization options             | Lengths                                                                                                    |
| Accessories                       | Connectors kit IP68,   Drivers 24VDC + DALI interface,   Miniflux accessories, joint, PG, feeding, end-cap |
| Net lamp weight                   | 0,72 kg                                                                                                    |

**Codes**  
BBOK0930007NPC

**Structure**  
transparent


**PACKAGE**  
Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,31 kg

## Certificazioni



NEMO  
STUDIO

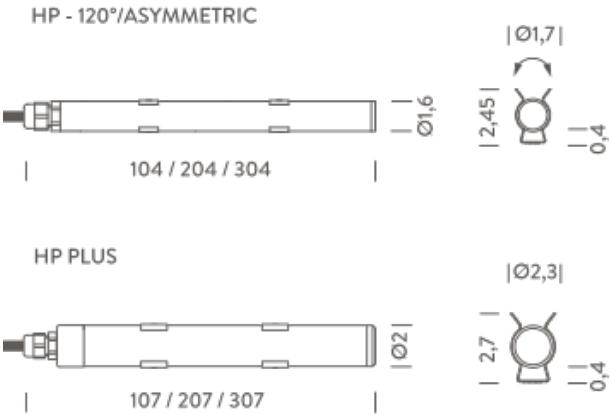

## 3M | 4000K HP - ASYMMETRIC

### LAMPING

|                                   |                                                                                                            |
|-----------------------------------|------------------------------------------------------------------------------------------------------------|
| Source                            | Linear LED                                                                                                 |
| Total power                       | 48W                                                                                                        |
| Emission                          | Direct asymmetric                                                                                          |
| Tension                           | 24VDC                                                                                                      |
| Color temperature                 | 4000K                                                                                                      |
| Luminous flux                     | 4158lm                                                                                                     |
| Initial luminaire efficacy        | > 130lm/W                                                                                                  |
| Initial chromaticity              | SDCM < 3                                                                                                   |
| Typ cri                           | 80                                                                                                         |
| Energy class                      | A+                                                                                                         |
| Ip class                          | 65                                                                                                         |
| Dimensions                        | ø2x307cm                                                                                                   |
| Materials                         | Polycarbonate                                                                                              |
| Ambient temperature range         | - 20°C / 50°                                                                                               |
| Performance ambient temperature   | 25°                                                                                                        |
| Mechanical impact protection code | IK08                                                                                                       |
| Notes                             | compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included                              |
| Customization options             | Lengths                                                                                                    |
| Accessories                       | Connectors kit IP68,   Drivers 24VDC + DALI interface,   Miniflux accessories, joint, PG, feeding, end-cap |
| Net lamp weight                   | 0,72 kg                                                                                                    |

### Codes

BBOK0930207NPC

### Structure

transparent

### PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,31 kg

### Certificazioni




NEMO  
STUDIO

HP - 120°/ASYMMETRIC



HP PLUS

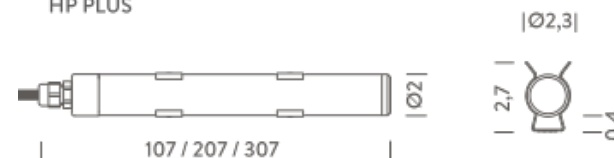



## 1M HP PLUS | 3000K

### LAMPING

|                                   |                                                                               |
|-----------------------------------|-------------------------------------------------------------------------------|
| Source                            | Linear LED                                                                    |
| Total power                       | 20W                                                                           |
| Emission                          | Direct 120°                                                                   |
| Tension                           | 24VDC                                                                         |
| Color temperature                 | 3000K                                                                         |
| Luminous flux                     | 2600lm                                                                        |
| Initial luminaire efficacy        | > 130lm/W                                                                     |
| Initial chromaticity              | SDCM < 3                                                                      |
| Typ cri                           | 80                                                                            |
| Energy class                      | A+                                                                            |
| Ip class                          | 65                                                                            |
| Dimensions                        | ø2x107cm                                                                      |
| Materials                         | Polycarbonate                                                                 |
| Ambient temperature range         | - 20°C / 50°                                                                  |
| Performance ambient temperature   | 25°                                                                           |
| Mechanical impact protection code | IK08                                                                          |
| Notes                             | compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included |
| Customization options             | Lengths                                                                       |
| Accessories                       | Connectors kit IP68,   Drivers 24VDC + DALI interface,                        |
| Net lamp weight                   | 0,31 kg                                                                       |

### Codes

BBOK0910015WPC

### Structure


transparent

### PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,5 kg

### Certificazioni

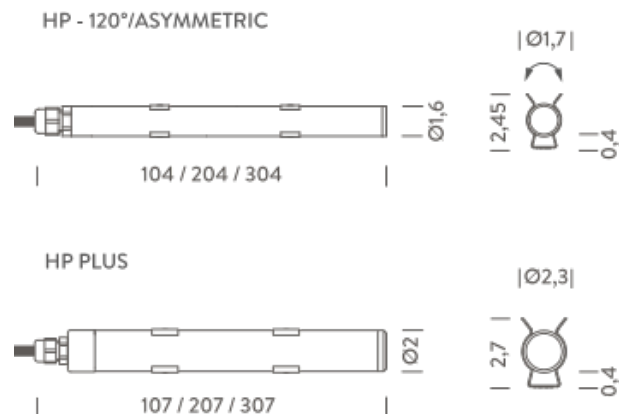

## 1M HP PLUS | 4000K

### LAMPING

|                                   |                                                                               |
|-----------------------------------|-------------------------------------------------------------------------------|
| Source                            | Linear LED                                                                    |
| Total power                       | 20W                                                                           |
| Emission                          | Direct 120°                                                                   |
| Tension                           | 24VDC                                                                         |
| Color temperature                 | 4000K                                                                         |
| Initial luminaire efficacy        | > 130lm/W                                                                     |
| Initial chromaticity              | SDCM < 3                                                                      |
| Typ cri                           | 80                                                                            |
| Energy class                      | A+                                                                            |
| Ip class                          | 65                                                                            |
| Dimensions                        | ø2x107cm                                                                      |
| Materials                         | Polycarbonate                                                                 |
| Ambient temperature range         | - 20°C / 50°                                                                  |
| Performance ambient temperature   | 25°                                                                           |
| Mechanical impact protection code | IK08                                                                          |
| Notes                             | compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included |
| Customization options             | Lengths                                                                       |
| Accessories                       | Connectors kit IP68,   Drivers 24VDC + DALI interface,                        |
| Net lamp weight                   | 0,31 kg                                                                       |

### Codes

BBOK0910015NPC

### Structure

transparent

### PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,5 kg


### Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

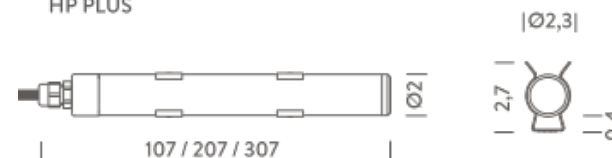

# 2M HP PLUS | 3000K

## LAMPING

|                                   |                                                                               |
|-----------------------------------|-------------------------------------------------------------------------------|
| Source                            | Linear LED                                                                    |
| Total power                       | 40W                                                                           |
| Emission                          | Direct 120°                                                                   |
| Tension                           | 24VDC                                                                         |
| Color temperature                 | 3000K                                                                         |
| Luminous flux                     | 5200lm                                                                        |
| Initial luminaire efficacy        | > 130lm/W                                                                     |
| Initial chromaticity              | SDCM < 3                                                                      |
| Typ cri                           | 80                                                                            |
| Energy class                      | A+                                                                            |
| Ip class                          | 65                                                                            |
| Dimensions                        | ø2x207cm                                                                      |
| Materials                         | Polycarbonate                                                                 |
| Ambient temperature range         | - 20°C / 50°                                                                  |
| Performance ambient temperature   | 25°                                                                           |
| Mechanical impact protection code | IK08                                                                          |
| Notes                             | compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included |
| Customization options             | Lengths                                                                       |
| Accessories                       | Connectors kit IP68,   Drivers 24VDC + DALI interface,                        |
| Net lamp weight                   | 0,49 kg                                                                       |

## Codes

BBOK0920015WPC

## Structure


transparent

## PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,72 kg

## Certificazioni

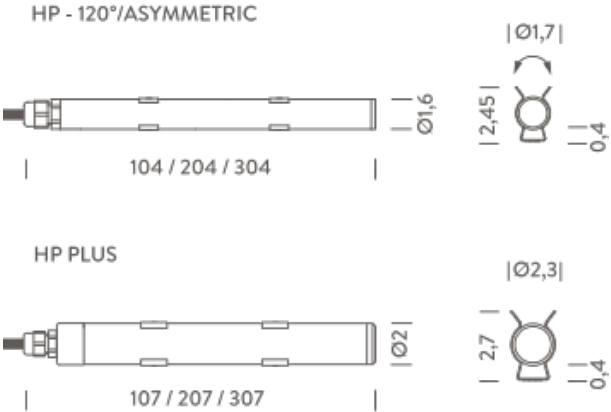

## 2M HP PLUS | 4000K

### LAMPING

|                                   |                                                                               |
|-----------------------------------|-------------------------------------------------------------------------------|
| Source                            | Linear LED                                                                    |
| Total power                       | 40W                                                                           |
| Emission                          | Direct 120°                                                                   |
| Tension                           | 24VDC                                                                         |
| Color temperature                 | 4000K                                                                         |
| Initial luminaire efficacy        | > 130lm/W                                                                     |
| Initial chromaticity              | SDCM < 3                                                                      |
| Typ cri                           | 80                                                                            |
| Energy class                      | A+                                                                            |
| Ip class                          | 65                                                                            |
| Dimensions                        | ø2x207cm                                                                      |
| Materials                         | Polycarbonate                                                                 |
| Ambient temperature range         | - 20°C / 50°                                                                  |
| Performance ambient temperature   | 25°                                                                           |
| Mechanical impact protection code | IK08                                                                          |
| Notes                             | compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included |
| Customization options             | Lengths                                                                       |
| Accessories                       | Connectors kit IP68,   Drivers 24VDC + DALI interface,                        |
| Net lamp weight                   | 0,49 kg                                                                       |

### Codes

BBOK0920015NPC

### Structure

transparent

### PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,72 kg


### Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

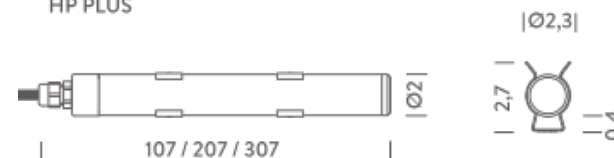

# 3M HP PLUS | 3000K

## LAMPING

|                                   |                                                                               |
|-----------------------------------|-------------------------------------------------------------------------------|
| Source                            | Linear LED                                                                    |
| Total power                       | 60W                                                                           |
| Emission                          | Direct 120°                                                                   |
| Tension                           | 24VDC                                                                         |
| Color temperature                 | 3000K                                                                         |
| Luminous flux                     | 7800lm                                                                        |
| Initial luminaire efficacy        | > 130lm/W                                                                     |
| Initial chromaticity              | SDCM < 3                                                                      |
| Typ cri                           | 80                                                                            |
| Energy class                      | A+                                                                            |
| Ip class                          | 65                                                                            |
| Dimensions                        | ø2x307cm                                                                      |
| Materials                         | Polycarbonate                                                                 |
| Ambient temperature range         | - 20°C / 50°                                                                  |
| Performance ambient temperature   | 25°                                                                           |
| Mechanical impact protection code | IK08                                                                          |
| Notes                             | compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included |
| Customization options             | Lengths                                                                       |
| Accessories                       | Connectors kit IP68,   Drivers 24VDC + DALI interface,                        |
| Net lamp weight                   | 0,72 kg                                                                       |

## Codes

BBOK0930015WPC


## Structure

transparent

## PACKAGE

Package 01      Dimension: 320x8,5x4 cm / Gross weight: 0,31 kg

## Certificazioni

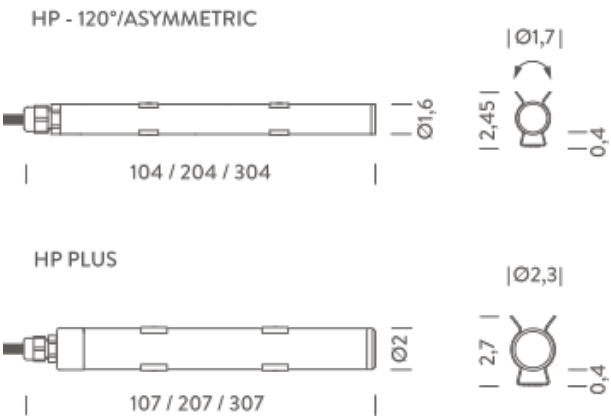

## 3M HP PLUS | 4000K

### LAMPING

|                                   |                                                                               |
|-----------------------------------|-------------------------------------------------------------------------------|
| Source                            | Linear LED                                                                    |
| Total power                       | 60W                                                                           |
| Emission                          | Direct 120°                                                                   |
| Tension                           | 24VDC                                                                         |
| Color temperature                 | 4000K                                                                         |
| Initial luminaire efficacy        | > 60lm/W                                                                      |
| Initial chromaticity              | SDCM < 3                                                                      |
| Typ cri                           | 80                                                                            |
| Energy class                      | A+                                                                            |
| Ip class                          | 65                                                                            |
| Dimensions                        | ø2x307cm                                                                      |
| Materials                         | Polycarbonate                                                                 |
| Ambient temperature range         | - 20°C / 50°                                                                  |
| Performance ambient temperature   | 25°                                                                           |
| Mechanical impact protection code | IK08                                                                          |
| Notes                             | compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included |
| Customization options             | Lengths                                                                       |
| Accessories                       | Connectors kit IP68,   Drivers 24VDC + DALI interface,                        |
| Net lamp weight                   | 0,72 kg                                                                       |

### Codes

BBOK0930015NPC

### Structure

transparent

### PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,31 kg

### Certificazioni



HP - 120°/ASYMMETRIC



HP PLUS

