


LINESCAPES

PENDANT HORIZONTAL

Family of floor, ceiling and wall elements, efficient with an highly versatile linear luminous output. Body in aluminium extruded and opal white polycarbonate diffuser. Horizontal cantilever wall version supplied with kit for connection with remote driver. White or black finishing with elements in grey painted on the floor and wall versions.

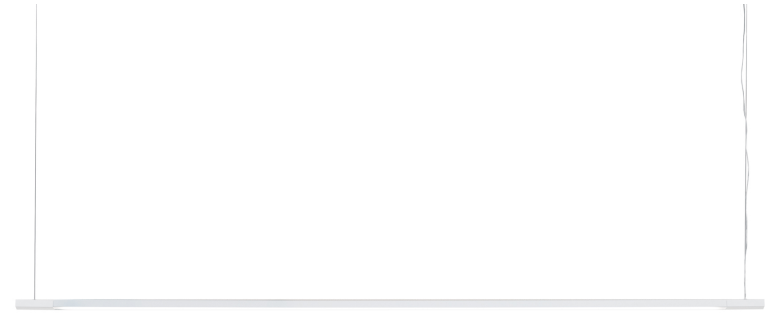

L130 - 2700K

LAMPING

Source	linear LED
Total power	19W
Emission	diffused orientable 360°
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	1125lm
Typ cri	80
Energy class	A+
Materials	Aluminium + PC + ABS
Notes	metal cable length 3m, electric cable length max 3m, orientable 360°, DALI version on request

Codes

LIN LW2 5D
LIN LN2 5D


Structure

white
black

PACKAGE

Package 01	Dimension: 65x18x23 cm / Gross weight: 2,5 kg
Package 02	Dimension: 110x5x5 cm / Gross weight: 1 kg

Certificazioni

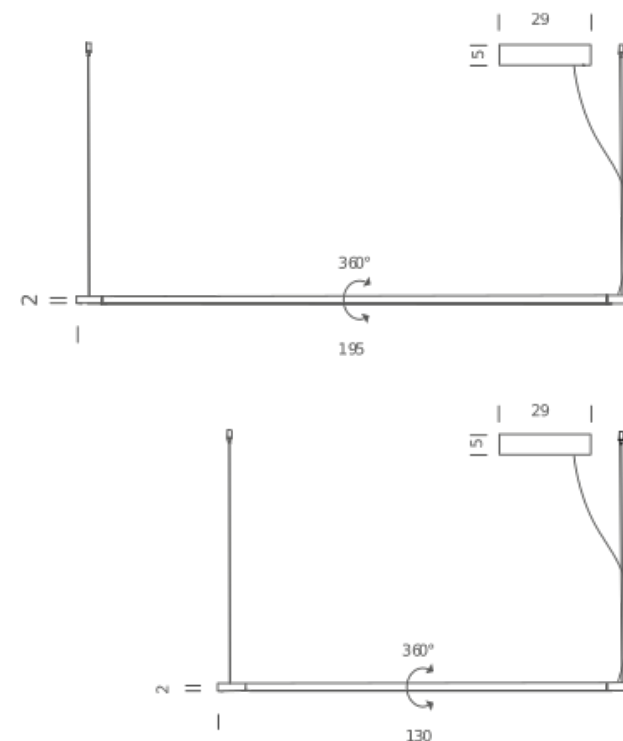

L130 - 3000K

LAMPING

Source	linear LED
Total power	19W
Emission	diffused orientable 360°
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	1125lm
Typ cri	80
Energy class	A+
Materials	Aluminium + PC + ABS
Notes	metal cable length 3m, electric cable length max 3m, orientable 360°, DALI version on request

Codes

LIN LWW 5D
LIN LNN 5D


Structure

white
black

PACKAGE

Package 01	Dimension: 65x18x23 cm / Gross weight: 2,5 kg
Package 02	Dimension: 110x5x5 cm / Gross weight: 1 kg

Certificazioni

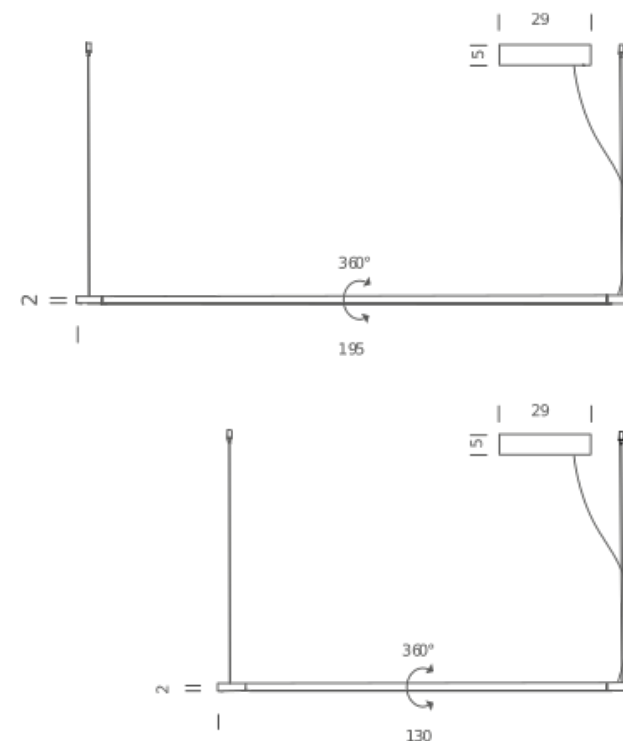

L200 - 2700K

LAMPING

Source	linear LED
Total power	33W
Emission	diffused orientable 360°
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	1765lm
Typ cri	80
Energy class	A+
Materials	Aluminium + PC + ABS
Notes	metal cable length 3m, electric cable length max 3m, orientable 360°, DALI version on request

Codes

LIN LW2 5E
LIN LN2 5E

Structure


white
black

PACKAGE

Package 01
Package 02

Dimension: 65x18x23 cm / Gross weight: 2,5 kg
Dimension: 175x5x5 cm / Gross weight: 1 kg

Certificazioni

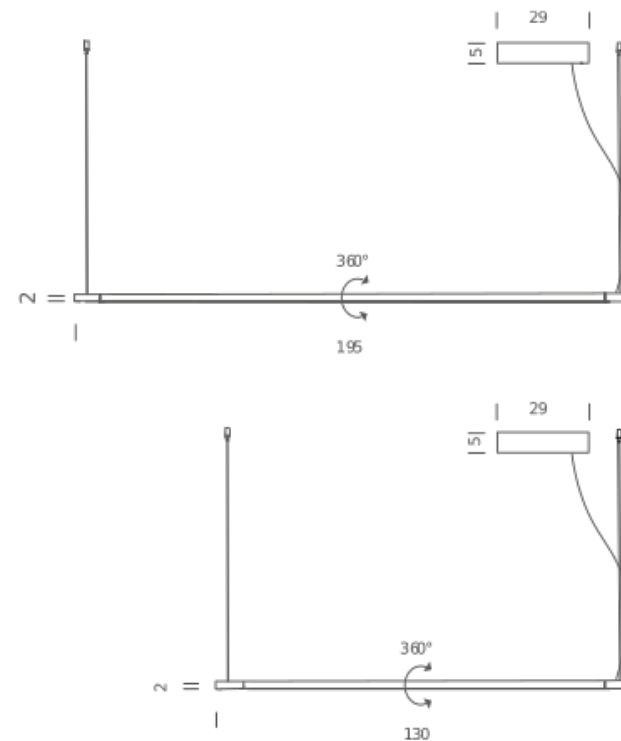

L200 - 3000K

LAMPING

Source	linear LED
Total power	33W
Emission	diffused orientable 360°
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	1765lm
Typ cri	80
Energy class	A+
Materials	Aluminium + PC + ABS
Notes	metal cable length 3m, electric cable length max 3m, orientable 360°, DALI version on request

Codes

LIN LWW 5E
LIN LNN 5E

Structure

white
black

PACKAGE

Package 01	Dimension: 65x18x23 cm / Gross weight: 2,5 kg
Package 02	Dimension: 175x5x5 cm / Gross weight: 1 kg

Certificazioni

