

APPLIQUE À VOLET PIVOTANT

Charlotte Perriand

Wall lamps with aluminium adjustable diffuser “volet” and metal structure.

Structure painted in white, diffuser “volet” in natural anodized aluminium, black anodized aluminium or mirror polished stainless steel.

For the small versions E14 and LED versions, the “volet” could be painted in red, yellow or blue.

E14 version is equipped with integrated switch (on board), cable and plug for a simple and free installation.

Indirect light output towards the wall and orientable flood beam.



R7S HALO

LAMPING

Source	R7s (75mm)
Total power	80W
Emission	indirect orientable
Switching	dimnable
Tension	230V
Dimensions	17x13x8
Materials	aluminium
Notes	orientable
Net lamp weight	0,8 kg

Codes

AVP HWD 31
AVP HWN 31
AVP HWH 31


Structure/Diffuser

white/aluminium
white/black
white/inox

PACKAGE

Package 01 Dimension: 15x24x10 cm / Gross weight: 0,9 kg

Certificazioni

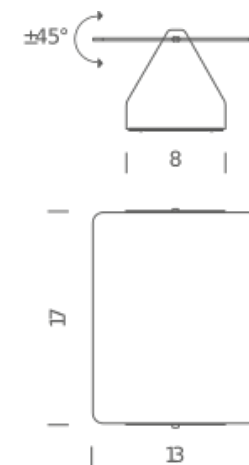

LED

LAMPING

Source	LED board
Total power	10W
Emission	indirect orientable
Tension	110/230V
Color temperature	3000K
Luminous flux	235lm (source luminous flux)
Typ cri	85
Energy class	A+
Dimensions	17x13x8
Materials	aluminium
Notes	orientable
Net lamp weight	0,8 kg

Codes

AVP LWD 31
AVP LWN 31
AVP LWR 31
AVP LWG 31
AVP LWB 31
AVP LWH 31
AVP LWW31

Structure/Diffuser


white/aluminium
white/black
white/red
white/yellow
white/blue
white/inox
white/white

PACKAGE

Package 01

Dimension: 15x24x10 cm / Gross weight: 0,9 kg

Certificazioni

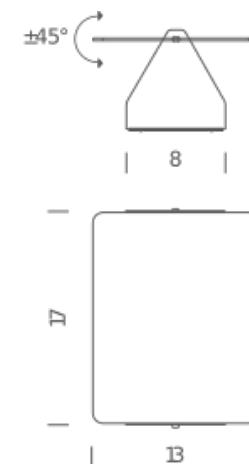

E14 LED/HALO/FLUO

LAMPING

Source	E14
Total power	40W
Emission	indirect orientable
Switching	dimnable according to bulb
Tension	230V
Materials	aluminium
Notes	switch on board, indirect orientable, bulb Ømax 3cm, with external cable plug (removable), cable length 1,1m; red RAL 3002, yellow RAL 1033, blue RAL 5002

Codes

AVP EWN 31
AVP EWD 31
AVP EWR 31
AVP EWG 31
AVP EWB 31
AVP EWH 31

Structure/Diffuser

white/black anodized
white/natural anodized
white/red
white/yellow
white/blue
white/stainless steel

PACKAGE

Package 01	Dimension: 15x24x10 cm
------------	------------------------

Certificazioni

