


PANZERI

XGQ1211

220-240V AC dimmable (DALI/Push DIM)
XGQ1211.0402

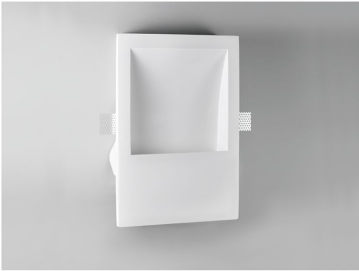

Lighting fixture for ceiling or wall built-in installation for interiors, with indirect light emission.
Total built-in plaster structure for masonry or plasterboard.
Aluminium dissipation plate.
Flat frosted glass diffuser.
Fixing brackets in micro-perforated sheet metal.
Recessed housing for masonry in galvanized sheet metal to be ordered separately.
Built-in hole dimension: 305x440mm (12x17,3")

Data sheet


CODE	XGQ1211.0402
SYSTEM POWER CONSUMPTION	15W
EFFICACY	70.87lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	Asymmetric
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	Dimmable (DALI/Push DIM)
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	1898lm
LUMEN OUTPUT	1063lm
EFFICIENCY	56.006%
WEIGHT	3,5350Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	13 x 49 x 37

Finish

Plaster




Technical drawing

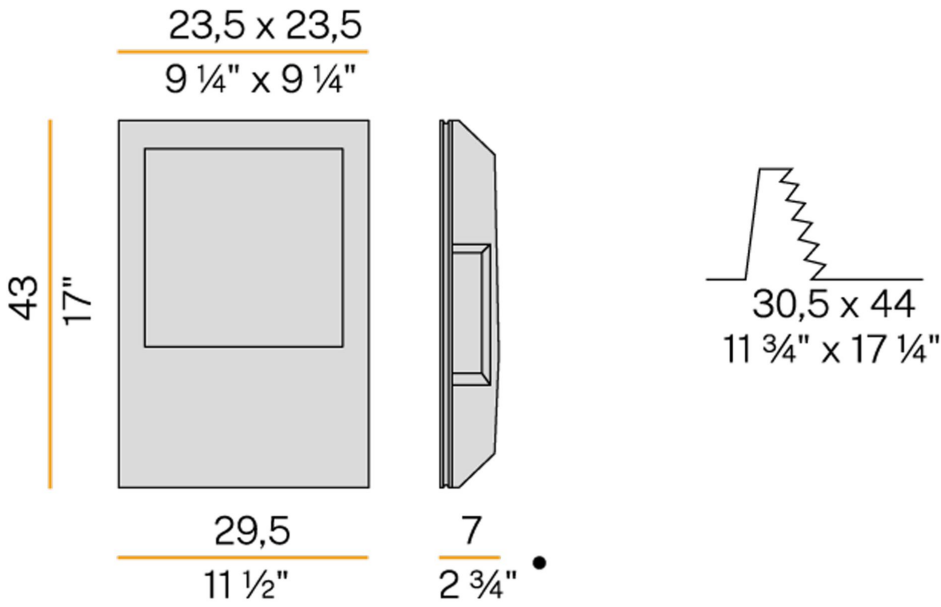

PANZERI

XGQ1211

220-240V AC ON-OFF
XGQ1211.0401

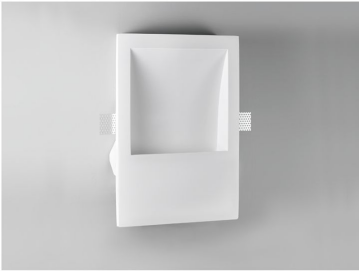

Lighting fixture for ceiling or wall built-in installation for interiors, with indirect light emission.
Total built-in plaster structure for masonry or plasterboard.
Aluminium dissipation plate.
Flat frosted glass diffuser.
Fixing brackets in micro-perforated sheet metal.
Recessed housing for masonry in galvanized sheet metal to be ordered separately.
Built-in hole dimension: 305x440mm (12x17,3")

Data sheet

CODE	XGQ1211.0401
SYSTEM POWER CONSUMPTION	15W
EFFICACY	70.87lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	Asymmetric
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	1898lm
LUMEN OUTPUT	1063lm
EFFICIENCY	56.006%
WEIGHT	3,5350Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	13 x 49 x 37

Finish

Plaster



Technical drawing

