


PANZERI

THREE

220-240V AC ON-OFF
P03901.015.0406

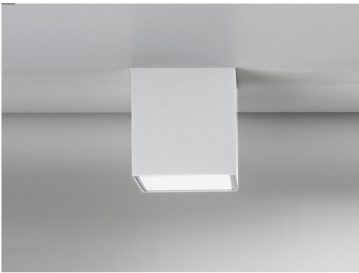

Ceiling or wall lighting fixture for interiors, with direct light emission.
Pickled sheet metal ceiling/wall bracket in polyacrylic paint.
Extruded aluminium structure in white, black, bronze or matt brass polyacrylic paint.
Aluminium dissipation plate.
Flat frosted glass diffuser.
Pickled sheet metal frame in polyacrylic paint.

Data sheet


CODE	P03901.015.0406
SYSTEM POWER CONSUMPTION	15W
EFFICACY	63.73lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 50.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	1275lm
LUMEN OUTPUT	956lm
EFFICIENCY	74.98%
WEIGHT	1,3700Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	21 x 22 x 21

Finish

White




Technical drawing

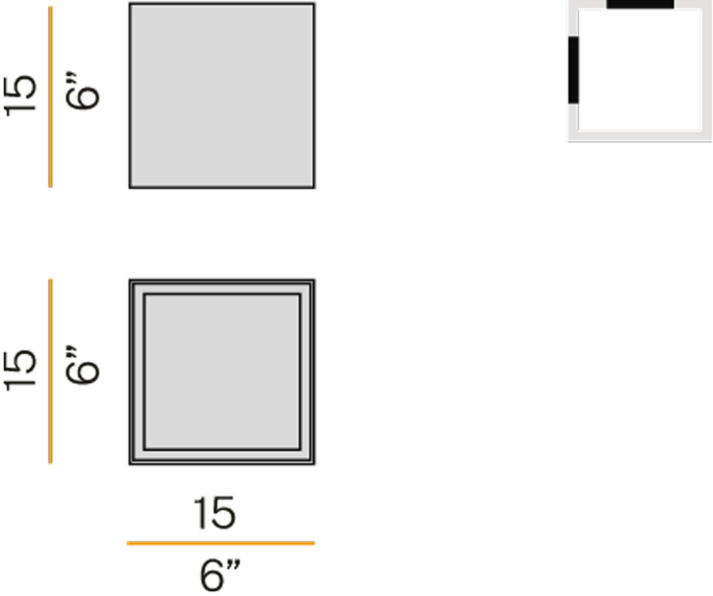

Accessories / source

XM14/230

Dimmable device for 230V LED modules, 5÷100W.



PANZERI

THREE

220-240V AC ON-OFF
P03901.011.0406

Ceiling or wall lighting fixture for interiors, with direct light emission.
Pickled sheet metal ceiling/wall bracket in polyacrylic paint.
Extruded aluminium structure in white, black, bronze or matt brass polyacrylic paint.
Aluminium dissipation plate.
Flat frosted glass diffuser.
Pickled sheet metal frame in polyacrylic paint.



Data sheet


CODE	P03901.011.0406
SYSTEM POWER CONSUMPTION	10W
EFFICACY	59.5lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 50.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	850lm
LUMEN OUTPUT	595lm
EFFICIENCY	70%
WEIGHT	0,5200Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	14 x 14 x 25

Finish

White 



Technical drawing

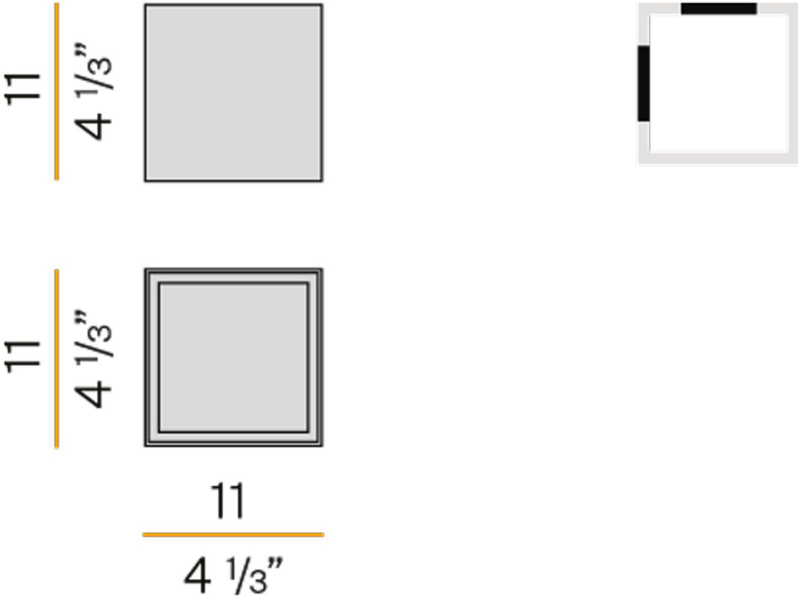

Accessories / source

XM14/230

Dimmable device for 230V LED modules, 5÷100W.

