

PANZERI

BROOKLYN ROUND

220-240V AC dimmable (DALI/Push DIM)
L23201.360.0402



Suspension lighting fixture for interiors, with direct light emission.
Bended extruded aluminium structure in white, black or matt brass polyacrylic paint.
Extruded polycarbonate diffuser with opaline finish.
Suspension kit with griplocks and 5m (196,9") long steel cables.
5m (196,9") long power cable in transparent PVC.
Power canopy with pickled sheet metal ceiling bracket and covering in RAL 9003 white polyacrylic paint.

Data sheet


CODE	L23201.360.0402
SYSTEM POWER CONSUMPTION	109W
EFFICACY	54.41lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	Dimmable (DALI/Push DIM)
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	13680lm
LUMEN OUTPUT	5931lm
EFFICIENCY	43.355%
WEIGHT	5,8300Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	202 x 202 x 13

Finish

White



Technical drawing

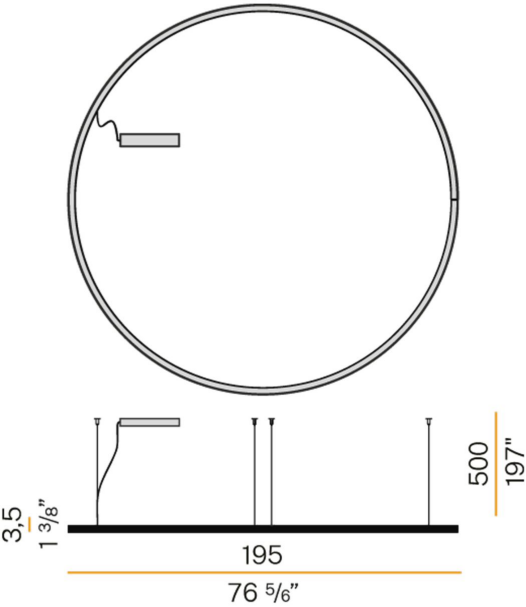

PANZERI

BROOKLYN ROUND

220-240V AC dimmable (DALI/Push DIM)
L23201.180.0402



Suspension lighting fixture for interiors, with direct light emission.
Bended extruded aluminium structure in white, black or matt brass polyacrylic paint.
Extruded polycarbonate diffuser with opaline finish.
Galvanized sheet metal end caps in polyacrylic paint.
Suspension kit with griplocks and 5m (196,9") long steel cables.
5m (196,9") long power cable in transparent PVC.
Power canopy with pickled sheet metal ceiling bracket and covering in RAL 9003 white polyacrylic paint.

Data sheet

CODE	L23201.180.0402
SYSTEM POWER CONSUMPTION	55W
EFFICACY	53.9lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	Dimmable (DALI/Push DIM)
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	6840lm
LUMEN OUTPUT	2965lm
EFFICIENCY	43.348%
WEIGHT	3,3770Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	12 x 202 x 106

Finish

White



Technical drawing

