


PANZERI

KIPS

24V DC
XG27001.200.0099

Modular profile for ceiling or wall built-in installation for interiors, with direct light emission. Built-in structure in plasterboard, in extruded aluminium in RAL 9003 white powder paint. Light modules and driver to be ordered separately. Fastening, joining and closing accessories to be ordered separately. Built-in hole dimension: 2005x9mm (78,9x0,4")

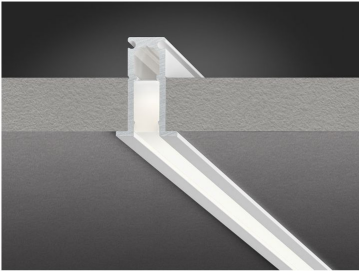

Data sheet


CODE	XG27001.200.0099
SYSTEM POWER CONSUMPTION	Max 10,6W/m
EFFICACY	0lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	
COLOUR TEMPERATURE	
LIGHT DISTRIBUTION	
POWER SUPPLY	24V DC
FREQUENCY	
ELECTRICAL CONFIGURATION	
DRIVER	Remote Not Included
NOMINAL LUMINOUS FLUX	
LUMEN OUTPUT	
EFFICIENCY	NAN%
WEIGHT	0,0000Kg
PROTECTION DEGREE	IP40 IP20
COLOUR TOLLERANCES	
PACKING DIMENSIONS (CM)	0 x 0 x 0



Finish

White 

Technical drawing

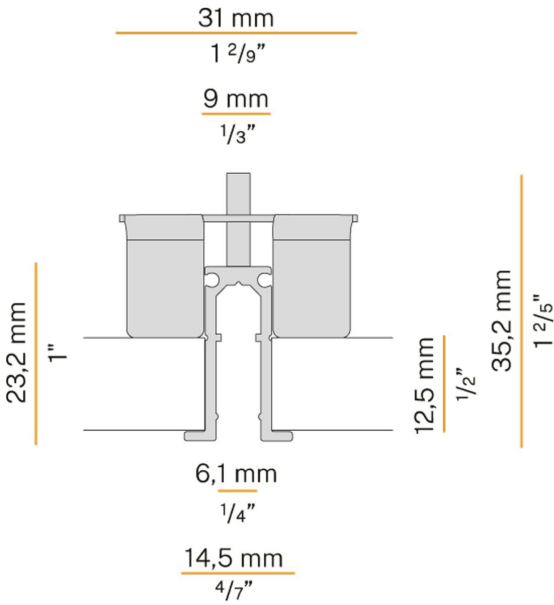


PANZERI

KIPS

24V DC
XG27001.100.0099

Modular profile for ceiling or wall built-in installation for interiors, with direct light emission. Built-in structure in plasterboard, in extruded aluminium in RAL 9003 white powder paint. Light modules and driver to be ordered separately. Fastening, joining and closing accessories to be ordered separately. Built-in hole dimension: 1005x9mm (39,6x0,4")

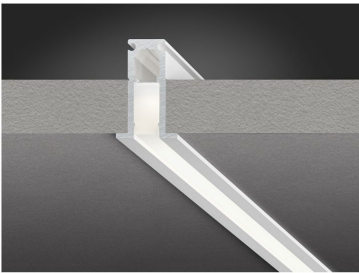

Data sheet

CODE	XG27001.100.0099
SYSTEM POWER CONSUMPTION	Max 10,6W/m
EFFICACY	0lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	
COLOUR TEMPERATURE	
LIGHT DISTRIBUTION	
POWER SUPPLY	24V DC
FREQUENCY	
ELECTRICAL CONFIGURATION	
DRIVER	Remote Not Included
NOMINAL LUMINOUS FLUX	
LUMEN OUTPUT	
EFFICIENCY	NAN%
WEIGHT	0,0000Kg
PROTECTION DEGREE	IP40 IP20
COLOUR TOLLERANCES	
PACKING DIMENSIONS (CM)	0 x 0 x 0

Finish

White



Technical drawing

