

PANZERI

VENEXIA

220-240V AC ON-OFF
ET04816.070.0201



Floor lighting fixture for outdoor spaces, with direct light emission.
Galvanized sheet metal bracket for floor installation.
Turned aluminium base in corten, micaceous grey or matt brass polyacrylic paint.
Body in aluminium tube in corten or micaceous grey polyacrylic paint, or with wood finish coating.
Turned aluminium structure in corten, micaceous grey or matt brass polyacrylic paint.
Transparent silicone gaskets.
Screen in partially matt cast glass.
Turned aluminium closing disk in corten, micaceous grey or matt brass polyacrylic paint.
Nickelled brass M12 cable gland.
Stainless steel screws.
Equipped with neoprene power cable.

Data sheet


CODE	ET04816.070.0201
SYSTEM POWER CONSUMPTION	8W
EFFICACY	74.25lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	2700K Ra>80
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	930lm
LUMEN OUTPUT	594lm
EFFICIENCY	63.871%
WEIGHT	4,0000Kg
PROTECTION DEGREE	IP65
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	0 x 0 x 0

Finish

Corten



Technical drawing

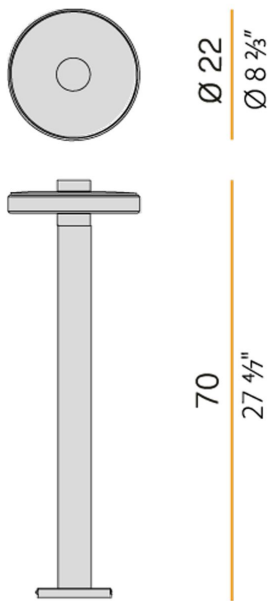

PANZERI

VENEXIA

220-240V AC ON-OFF
ET04816.095.0201



Floor lighting fixture for outdoor spaces, with direct light emission.
Galvanized sheet metal bracket for floor installation.
Turned aluminium base in corten, micaceous grey or matt brass polyacrylic paint.
Body in aluminium tube in corten or micaceous grey polyacrylic paint, or with wood finish coating.
Turned aluminium structure in corten, micaceous grey or matt brass polyacrylic paint.
Transparent silicone gaskets.
Screen in partially matt cast glass.
Turned aluminium closing disk in corten, micaceous grey or matt brass polyacrylic paint.
Nickelled brass M12 cable gland.
Stainless steel screws.
Equipped with neoprene power cable.

Data sheet

CODE	ET04816.095.0201
SYSTEM POWER CONSUMPTION	8W
EFFICACY	74.25lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	2700K Ra>80
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	930lm
LUMEN OUTPUT	594lm
EFFICIENCY	63.871%
WEIGHT	4,2100Kg
PROTECTION DEGREE	IP65
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	0 x 0 x 0

Finish


Corten



Technical drawing



Ø 22
Ø 8 3/5"



95
37 3/4"

