

PANZERI

BROOKLYN ROUND

220-240V AC dimmable (DALI/Push DIM)
P23101.360.0402

Ceiling or wall lighting fixture for interiors, with direct light emission.
Bended extruded aluminium structure in white, black or matt brass polyacrylic paint.
Extruded polycarbonate diffuser with opaline finish.
Turned brass ceiling-fastening spacers in polyacrylic paint.



Data sheet



CODE	P23101.360.0402
SYSTEM POWER CONSUMPTION	55W
EFFICACY	53.9lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	Dimmable (DALI/Push DIM)
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	6840lm
LUMEN OUTPUT	2965lm
EFFICIENCY	43.348%
WEIGHT	3,2900Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	108 x 108 x 13



Finish

White 

Technical drawing

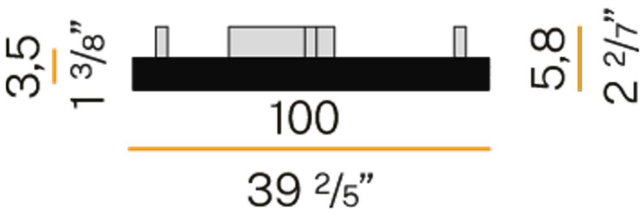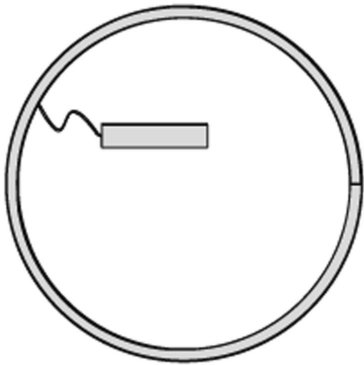

PANZERI

BROOKLYN ROUND

220-240V AC dimmable (DALI/Push DIM)
P23201.360.0402

Ceiling or wall lighting fixture for interiors, with direct light emission.
Bended extruded aluminium structure in white, black or matt brass polyacrylic paint.
Extruded polycarbonate diffuser with opaline finish.
Turned brass ceiling-fastening spacers in polyacrylic paint.



Data sheet

CODE	P23201.360.0402
SYSTEM POWER CONSUMPTION	109W
EFFICACY	54.41lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	Dimmable (DALI/Push DIM)
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	13680lm
LUMEN OUTPUT	5931lm
EFFICIENCY	43.355%
WEIGHT	5,8300Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	202 x 202 x 13

Finish

White 



Technical drawing

