


# PANZERI

## KIPS ROUND

24V DC  
XG27301.100.0099

Modular profile for ceiling or wall built-in installation for interiors, with direct light emission. Built-in structure in plasterboard, in bended extruded aluminium in RAL 9003 white powder paint.  
Light modules and driver to be ordered separately.  
Fastening, joining and closing accessories to be ordered separately.  
Built-in hole dimension: external Ø 1028mm (40,5") / internal Ø 1009mm (39,7")

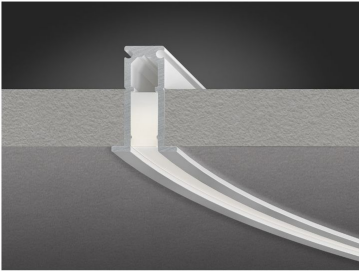

### Data sheet


CODE	XG27301.100.0099
SYSTEM POWER CONSUMPTION	Max 17W
EFFICACY	0lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	
COLOUR TEMPERATURE	
LIGHT DISTRIBUTION	
POWER SUPPLY	24V DC
FREQUENCY	
ELECTRICAL CONFIGURATION	
DRIVER	Remote Not Included
NOMINAL LUMINOUS FLUX	
LUMEN OUTPUT	
EFFICIENCY	NAN%
WEIGHT	0,0000Kg
PROTECTION DEGREE	IP40 IP20
COLOUR TOLLERANCES	
PACKING DIMENSIONS (CM)	0 x 0 x 0

### Finish

White




Technical drawing

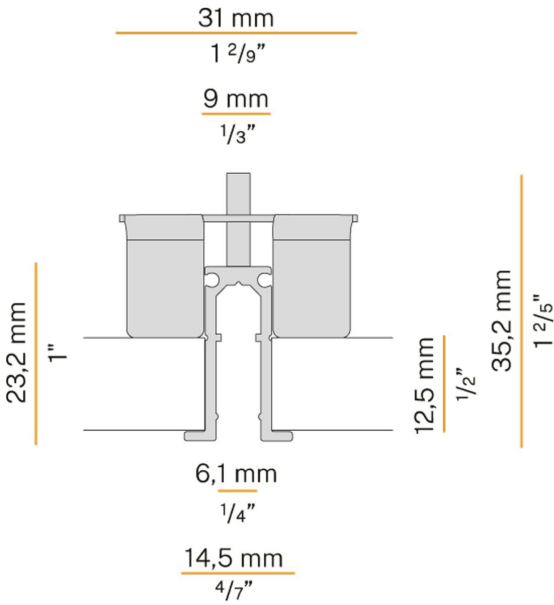

# PANZERI

## KIPS ROUND

24V DC  
XG27201.100.0099

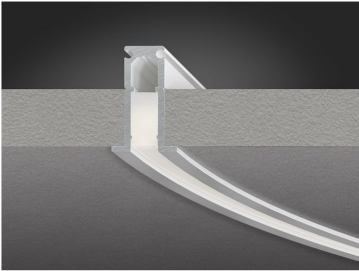

Modular profile for ceiling or wall built-in installation for interiors, with direct light emission. Built-in structure in plasterboard, in bended extruded aluminium in RAL 9003 white powder paint.  
Light modules and driver to be ordered separately.  
Fastening, joining and closing accessories to be ordered separately.  
Built-in hole dimension: external Ø 1028mm (40,5") / internal Ø 1009mm (39,7")

### Data sheet

CODE	XG27201.100.0099
SYSTEM POWER CONSUMPTION	Max 8,5W
EFFICACY	0lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	
COLOUR TEMPERATURE	
LIGHT DISTRIBUTION	
POWER SUPPLY	24V DC
FREQUENCY	
ELECTRICAL CONFIGURATION	
DRIVER	Remote Not Included
NOMINAL LUMINOUS FLUX	
LUMEN OUTPUT	
EFFICIENCY	NAN%
WEIGHT	0,0000Kg
PROTECTION DEGREE	IP40 IP20
COLOUR TOLLERANCES	
PACKING DIMENSIONS (CM)	0 x 0 x 0

### Finish

White



Technical drawing

