

# PANZERI

## SILVER RING

220-240V AC dimmable (DALI/Push DIM)  
L08201.180.0402



Suspension lighting fixture for interiors, with direct light emission.  
Pickled sheet metal structure in polyacrylic paint.  
Aluminium dissipation plates.  
Pickled sheet metal covers in white, black or bronze polyacrylic paint, or with gold leaf coating.  
Diffuser in modelled polycarbonate with opaline finish.  
Suspension kit with griplocks and 5m (196,9") long steel cables.  
5m (196,9") long power cable in transparent PVC.  
Power canopy with galvanized sheet metal ceiling bracket and pickled sheet metal covering in white, black or bronze polyacrylic paint, or with gold leaf coating.

### Data sheet


CODE	L08201.180.0402
SYSTEM POWER CONSUMPTION	110W
EFFICACY	71.36lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	Dimmable (DALI/Push DIM)
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	15716lm
LUMEN OUTPUT	7850lm
EFFICIENCY	49.949%
WEIGHT	20,7700Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	203 x 18 x 203

### Finish

White



Technical drawing

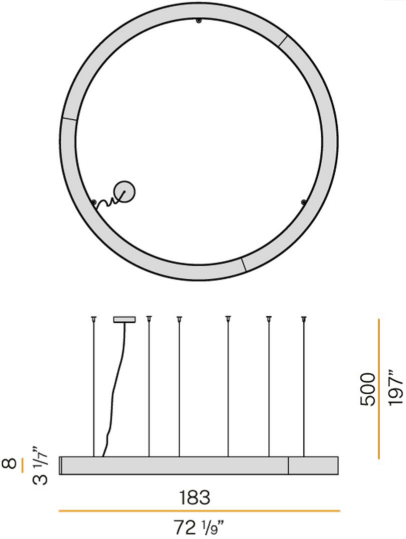

# PANZERI

## SILVER RING

220-240V AC dimmable (DALI/Push DIM)  
L08201.080.0402



Suspension lighting fixture for interiors, with direct light emission.  
Pickled sheet metal structure in polyacrylic paint.  
Aluminium dissipation plates.  
Pickled sheet metal covers in white, black or bronze polyacrylic paint, or with gold leaf coating.  
Diffuser in modelled polycarbonate with opaline finish.  
Suspension kit with griplocks and 2m (78,7") long steel cables.  
2,5m (98,4") long power cable in transparent PVC.  
Power canopy with galvanized sheet metal ceiling bracket and pickled sheet metal covering in white, black or bronze polyacrylic paint, or with gold leaf coating.

### Data sheet

CODE	L08201.080.0402
SYSTEM POWER CONSUMPTION	45W
EFFICACY	67.84lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	Diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	Dimmable (DALI/Push DIM)
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	6111lm
LUMEN OUTPUT	3053lm
EFFICIENCY	49.959%
WEIGHT	8,5500Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	90 x 18 x 90

### Finish

White



Technical drawing

