


PANZERI

TUBINO

220-240V AC ON-OFF
X07301.001.0501

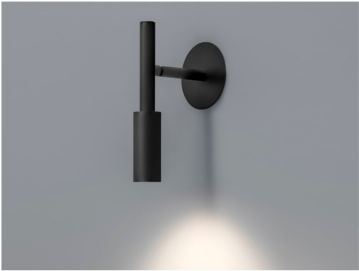

Lighting fixture for ceiling or wall semi-built-in installation for interiors, with swivelling light beam.

Pickled sheet metal fixing disk in white polyacrylic paint.

Pickled sheet metal wall plate in white, champagne, matt black, bronze or titanium polyacrylic paint.

Turned brass joints in polyacrylic paint.

Turned aluminium structure in polyacrylic paint.

Turned aluminium head rotating on two axes in polyacrylic paint.

Modelled polycarbonate diffuser with opaline finish.

Turned brass end cap in polyacrylic paint.

Recessed housing for masonry or plasterboard, in pickled sheet metal in polyacrylic paint.

Pickled sheet metal brackets for plasterboard fixing.

Built-in hole dimension: 95x95mm (3,7x3,7")

Data sheet


CODE	X07301.001.0501
SYSTEM POWER CONSUMPTION	6,5W
EFFICACY	56.5lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 80.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	Adjustable
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	475lm
LUMEN OUTPUT	339lm
EFFICIENCY	71.368%
WEIGHT	1,0900Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	14 x 24 x 29

Finish

White



Technical drawing

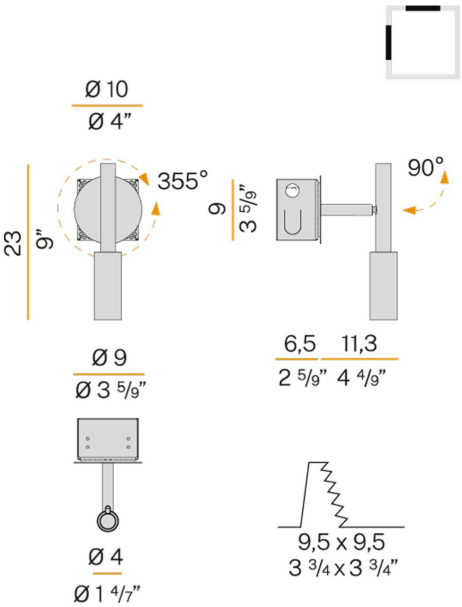

PANZERI

TUBINO

220-240V AC ON-OFF
A07301.001.0501



Ceiling or wall lighting fixture for interiors, with swivelling light beam.
Galvanized sheet metal ceiling or wall bracket.
Die-cast aluminium wall plate in white, champagne, matt black, bronze or titanium polyacrylic paint.
Turned brass joints in polyacrylic paint.
Turned aluminium structure in polyacrylic paint.
Turned aluminium head rotating on two axes in polyacrylic paint.
Modelled polycarbonate diffuser with opaline finish.
Turned brass end cap in polyacrylic paint.

Data sheet

CODE	A07301.001.0501
SYSTEM POWER CONSUMPTION	6,5W
EFFICACY	56.5lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 80.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	Adjustable
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	Integrated Included
NOMINAL LUMINOUS FLUX	475lm
LUMEN OUTPUT	339lm
EFFICIENCY	71.368%
WEIGHT	0,6200Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	14 x 24 x 29

Finish

White



Technical drawing

