

Gabriele Rosa

Light pendant LED lamp with diffused lighting, with 70% uplight and 30% downlight output. Arms in extruded aluminum, central structure in die-casted aluminum. Diffuser in opaline methacrylate. Available in matt white or black finish. Dimmable also with remote control.



REMOTE CONTROL LED

LAMPING

Source linear LED Total power 37,5W

Emission uplight, diffused

Switching dimmable, 1-10V, remote

Tension 110/240V Color temperature 3000K

Luminous flux 2130lm (source luminous flux)

Typ cri 83 Energy class A+

Dimensions 40x100x100

Materials aluminium + PC

Notes cable length max 2,5m

Net lamp weight 3 kg

Codes Structure


ALY LWW 52 white ALY LNN 52 black

PACKAGE

Package 01 Dimension: 16x64x47 cm / Gross weight: 4,5 kg

Certificazioni

C € EH[

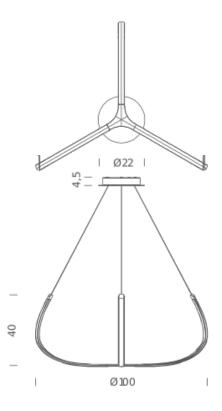

DALI PUSH 220V

LAMPING

Source Total power

Emission Switching Tension

Color temperature

Luminous flux

Typ cri

Energy class

Materials Notes

Codes

ALY LWW 53 ALY LNN 53

Certificazioni

C € ERI

linear LED 37,5W

uplight, diffused dimmable, DALI push

230V 3000K

2130lm (source luminous flux)

85 A+

> aluminium + PC cable length max 2,5m

Structure

white black

