

MINIFLUX OPAL

MINIFLUX is a modular LED system for indoor / outdoor suitable for cornice, decorative and accent lighting.

High-emission LED strip (24V DC) installed in an aluminium profile.

Opal polycarbonate diffuser for a homogenous emission of light.

Installation is realised through transparent polycarbonate clips that are adjusted for the customer's needs.

Miniflux can be supplied in numerous lengths and colour temperatures.

LED driver not included.



1M | 3000K

LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	905lm
Initial luminaire efficacy	> 60lm/W
Initial chromaticity	SDCM < 3
Typ cri	97
Energy class	A+
Ip class	65
Dimensions	ø2x103cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface, Miniflux accessories, joint, PG, feeding, end-cap
Net lamp weight	0,31 kg

Codes

BBOK0910G26WPO

Structure

opal white


PACKAGE

Package 01	Dimension: 120x8,5x4 cm / Gross weight: 0,5 kg
------------	--

Certificazioni



NEMO STUDIO

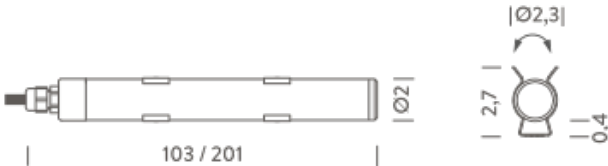

1M | 4000K

LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Initial luminaire efficacy	> 60lm/W
Initial chromaticity	SDCM < 3
Typ cri	94
Energy class	A+
Ip class	65
Dimensions	ø2x103cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface, Miniflux accessories, joint, PG, feeding, end-cap
Net lamp weight	0,31 kg

Codes

BBOK0910G26NPO

Structure


opal white

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,5 kg

Certificazioni

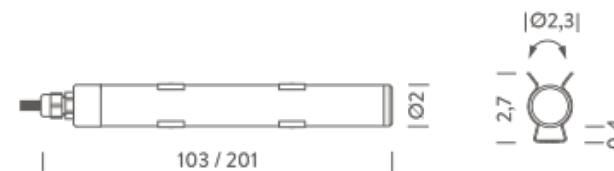

2M | 3000K

LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Initial luminaire efficacy	> 60lm/W
Initial chromaticity	SDCM < 3
Typ cri	97
Energy class	A+
Ip class	65
Dimensions	ø2x201cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface, Miniflux accessories, joint, PG, feeding, end-cap
Net lamp weight	0,49 kg

Codes

BBOK0920G26WPO


Structure

opal white

PACKAGE

Package 01	Dimension: 220x8,5x4 cm / Gross weight: 0,31 kg
------------	---

Certificazioni

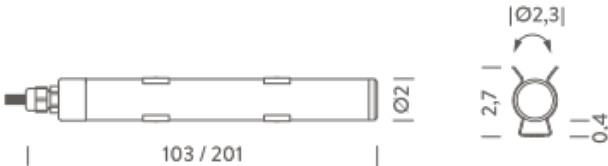

2M | 4000K

LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Initial luminaire efficacy	> 40lm/W
Initial chromaticity	SDCM < 3
Typ cri	94
Energy class	A+
Ip class	65
Dimensions	ø2x201cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Mechanical impact protection code	IK10
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface, Miniflux accessories, joint, PG, feeding, end-cap
Net lamp weight	0,49 kg

Codes
BBOK0920G26NPO

PACKAGE

Package 01 Dimension: 220x8,5x4 cm / Gross weight: 1,75 kg

Certificazioni

