

SLACKLINE REGULAR

SLACKLINE family is composed of a wide selection of aluminium profiles with different fixing types but with the same LED source:

Slackline Trim, Slackline Regular and Slackline Micro. These characteristics make the Slackline installation very flexible in any ambience.

Minimal design and excellent light quality.

Slackline is also suitable for linear connection solutions (on request).

Depending on fixing types, the Slackline comes in various different standard lengths with CRI>94.



RECESSED | 1M - 3000K

LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Luminous flux	860lm
Initial luminaire efficacy	> 55lm/W
Initial chromaticity	SDCM < 3
Typ cri	97
Energy class	A+
Ip class	40
Dimensions	5,14x1,35x100,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,45 kg

Codes

BSLA2110G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

Certificazioni




SUSPENDED

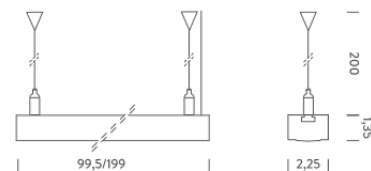

CEILING



RECESSED

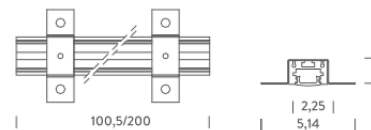

WALL MOUNTED



RECESSED | 1M - 4000K

LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	890lm
Initial luminaire efficacy	> 55lm/W
Initial chromaticity	SDCM < 3
Typ cri	94
Energy class	A+
Ip class	40
Dimensions	5,14x1,35x100,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,45 kg

Codes

BSLA2110G26NAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg

Certificazioni




SUSPENDED

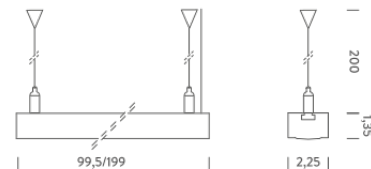

CEILING



RECESSED

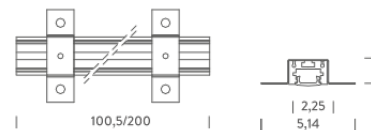

WALL MOUNTED



RECESSED | 2M - 3000K

LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Luminous flux	1720lm
Initial luminaire efficacy	> 55lm/W
Initial chromaticity	SDCM < 3
Typ cri	97
Energy class	A+
Ip class	40
Dimensions	5,14x1,35x200cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,87 kg

Codes

BSLA2120G26WAA

Structure


grey

PACKAGE

Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg

Certificazioni

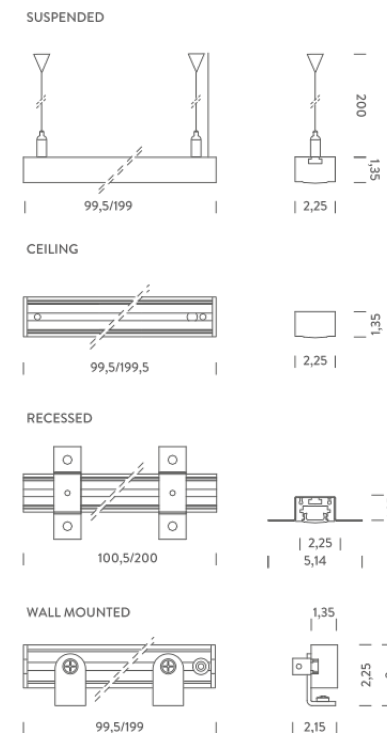

RECESSED | 2M - 4000K

LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	1780lm
Initial luminaire efficacy	> 55lm/W
Initial chromaticity	SDCM < 3
Typ cri	94
Energy class	A+
Ip class	40
Dimensions	5,14x1,35x200cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,87 kg

Codes

BSLA2120G26NAA

Structure


grey

PACKAGE

Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

Certificazioni

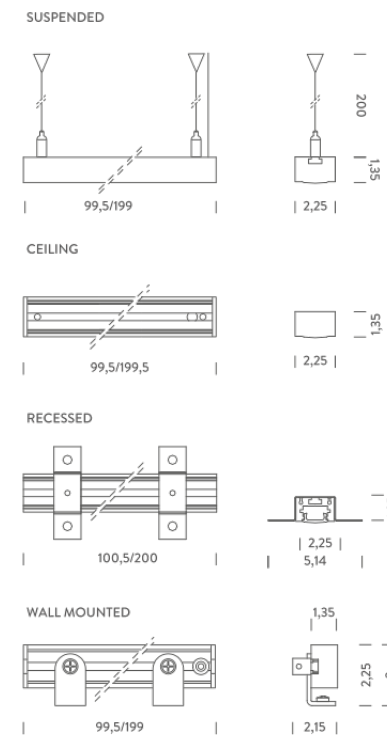

PENDANT | 1M - 3000K

LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Luminous flux	860lm
Initial luminaire efficacy	> 55lm/W
Initial chromaticity	SDCM < 3
Typ cri	97
Energy class	A+
Ip class	40
Dimensions	2,25x1,35x100cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,45 kg

Codes

BSLA0310G26WAA

Structure


grey

PACKAGE

Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

Certificazioni

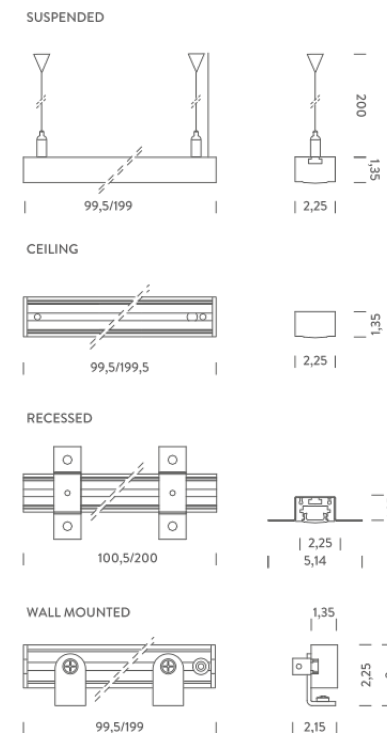

PENDANT | 1M - 4000K

LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	890lm
Initial luminaire efficacy	> 55lm/W
Initial chromaticity	SDCM < 3
Typ cri	94
Energy class	A+
Ip class	40
Dimensions	2,25x1,35x100cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,45 kg

Codes

BSLA0310G26NAA

Structure


grey

PACKAGE

Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg

Certificazioni

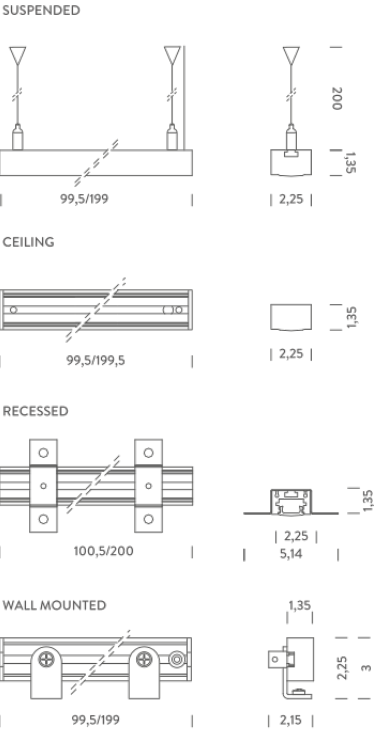

PENDANT | 2M - 3000K

LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Luminous flux	1720lm
Initial luminaire efficacy	> 55lm/W
Initial chromaticity	SDCM < 3
Typ cri	97
Energy class	A+
Ip class	40
Dimensions	2,25x1,35x199,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,87 kg

Codes

BSLA0320G26WAA

Structure


grey

PACKAGE

Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg

Certificazioni

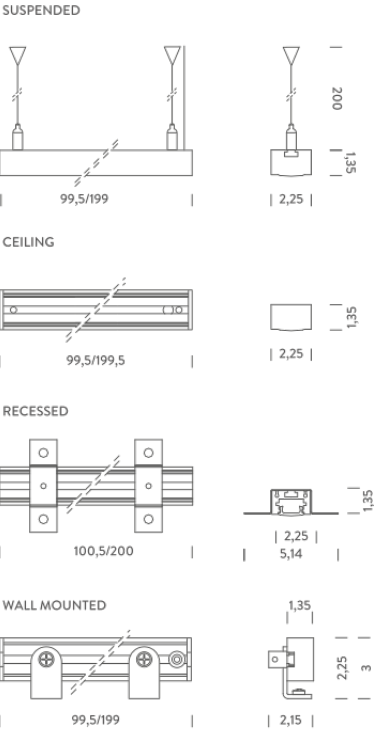

PENDANT | 2M - 4000K

LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	1780lm
Initial luminaire efficacy	> 55lm/W
Initial chromaticity	SDCM < 3
Typ cri	94
Energy class	A+
Ip class	40
Dimensions	2,25x1,35x199,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,87 kg

Codes

BSLA0320G26NAA

Structure


grey

PACKAGE

Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,45 kg

Certificazioni

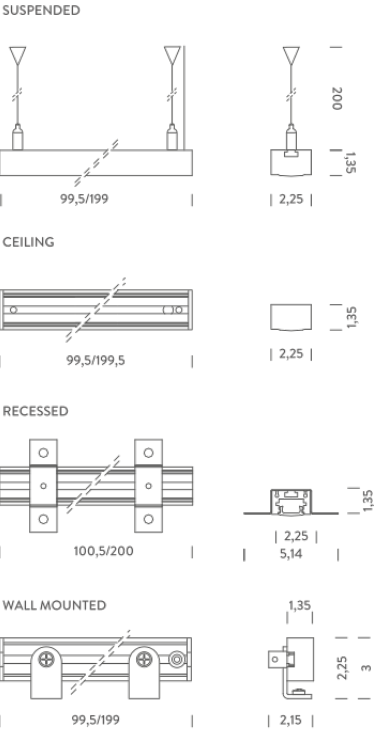

CEILING | 1M - 3000K

LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Luminous flux	860lm
Initial luminaire efficacy	> 55lm/W
Initial chromaticity	SDCM < 3
Typ cri	97
Energy class	A+
Ip class	40
Dimensions	2,25x1,35x100cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,45 kg

Codes

BSLA0410G26WAA

Structure


grey

PACKAGE

Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

Certificazioni

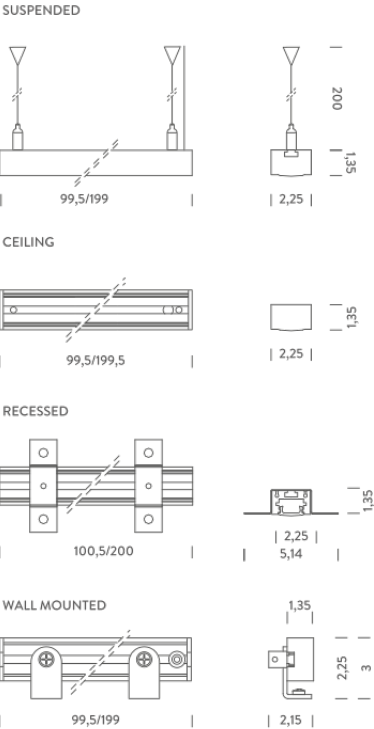

CEILING | 1M - 4000K

LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	890lm
Initial luminaire efficacy	> 55lm/W
Initial chromaticity	SDCM < 3
Typ cri	94
Energy class	A+
Ip class	40
Dimensions	2,25x1,35x100cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,45 kg

Codes

BSLA0410G26NAA

Structure


grey

PACKAGE

Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,87 kg

Certificazioni

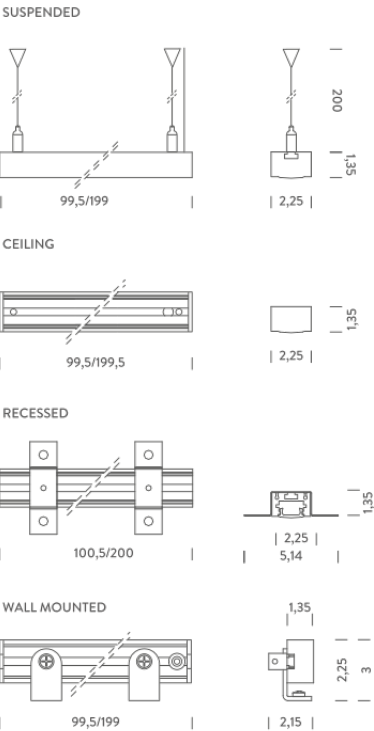

CEILING | 2M - 3000K

LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Luminous flux	1720lm
Initial luminaire efficacy	> 55lm/W
Initial chromaticity	SDCM < 3
Typ cri	97
Energy class	A+
Ip class	40
Dimensions	2,25x1,35x200mm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,87 kg

Codes

BSLA0420G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg

Certificazioni




SUSPENDED

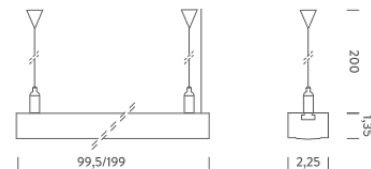

CEILING



RECESSED

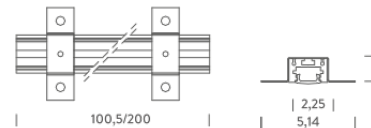

WALL MOUNTED



CEILING | 2M - 4000K

LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	1780lm
Initial luminaire efficacy	> 55lm/W
Initial chromaticity	SDCM < 3
Typ cri	94
Energy class	A+
Ip class	40
Dimensions	2,25x1,35x200mm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,87 kg

Codes

BSLA0420G26NAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg

Certificazioni




SUSPENDED

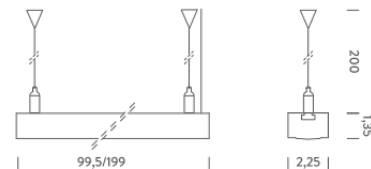

CEILING



RECESSED

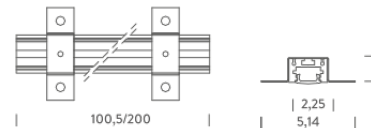

WALL MOUNTED



WALL | 1M - 3000K

LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Luminous flux	860lm
Initial luminaire efficacy	> 55lm/W
Initial chromaticity	SDCM < 3
Typ cri	97
Energy class	A+
Ip class	40
Dimensions	3x2,15x100cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,87 kg

Codes

BSLA4010G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg

Certificazioni




SUSPENDED

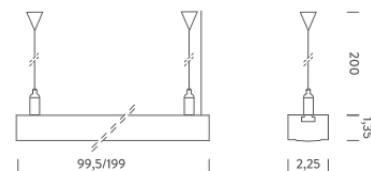

CEILING



RECESSED

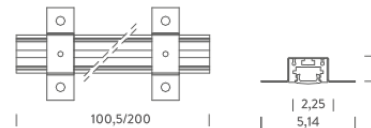

WALL MOUNTED



WALL | 1M - 4000K

LAMPING

Source	Linear LED
Total power	15W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	890lm
Initial luminaire efficacy	> 55lm/W
Initial chromaticity	SDCM < 3
Typ cri	94
Energy class	A+
Ip class	40
Dimensions	3x2,15x100cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,87 kg

Codes

BSLA4010G26NAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg

Certificazioni




SUSPENDED

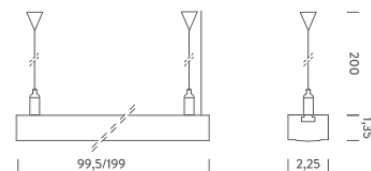

CEILING



RECESSED

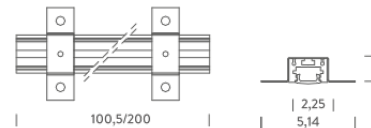

WALL MOUNTED



WALL | 2M - 3000K

LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused
Tension	24VDC
Color temperature	3000K
Luminous flux	1720lm
Initial luminaire efficacy	> 55lm/W
Initial chromaticity	SDCM < 3
Typ cri	97
Energy class	A+
Ip class	40
Dimensions	3x2,15x199,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included
Customization options	Lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,87 kg

Codes

BSLA4020G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg

Certificazioni




SUSPENDED

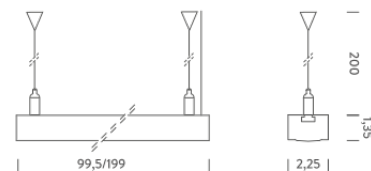

CEILING



RECESSED

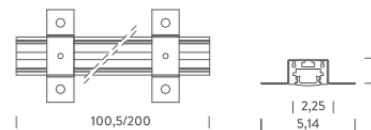

WALL MOUNTED



WALL | 2M - 4000K

LAMPING

Source	Linear LED
Total power	30W
Emission	Diffused
Tension	24VDC
Color temperature	4000K
Luminous flux	1780lm
Initial luminaire efficacy	> 36lm/W
Initial chromaticity	SDCM < 3
Typ cri	94
Energy class	A+
Ip class	40
Dimensions	3x2,15x199,5cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 0,5m; driver not included
Customization options	Lengths
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,87 kg

Codes

BSLA4020G26NAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,2 kg

Certificazioni




SUSPENDED

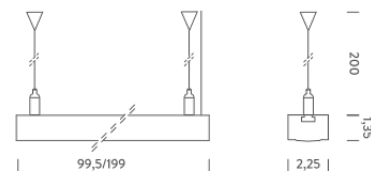

CEILING



RECESSED

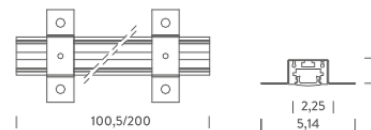

WALL MOUNTED

