




The sizes are expressed in millimeters / inches.

DESIGN DANIELE SPREGA - 2014
OUTDOOR LAMP - METAL



IP 65

BUBKA

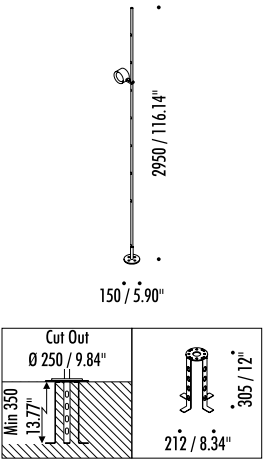

17390003	STANDARD - 3000K	MAX 700 mA DC - 8,4 W LED - 639 lm - CRI>90 BLACK CABLE 7 m - OPTIONAL INSTALLATION KIT NOT INCLUDED CUT-OUT Ø 250 mm MINIMUM SPACE FOR MOUNTING 350 mm ADJUSTABLE INCLUDES LED DRIVER (700 mA DC) INPUT 110-240 V - 50/60 Hz - IP67 - NOT DIMMABLE
17390003-27	STANDARD - 2700K	

OPTIONAL INSTALLATION KITS

17730003	STANDARD	INSTALLATION ANCHORING BOLT

OPTIONAL ACCESSORIES

18510403	MATT BLACK - 3000K	ADDITIONAL LED HEAD MAX 700 mA DC - 8,4 W LED - 639 lm - CRI>90 COMPULSORY INSTALLATION KIT NOT INCLUDED
18510403-27	MATT BLACK - 2700K	

COMPULSORY INSTALLATION KIT FOR ADDITIONAL LED HEAD

51120100	STANDARD	DRIVER LED INPUT 110-240 V - 50/60 Hz - OUTPUT 700 mA DC - 21 W - IP67 NOT DIMMABLE




The sizes are expressed in millimeters.

DESIGN DANIELE SPREGA - 2014
LAMPADA DA ESTERNO - METALLO
OUTDOOR LAMP - METAL

BUBKA

CE  IP 65

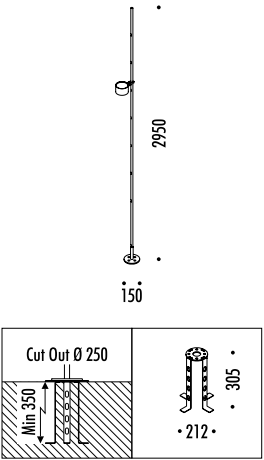

173900	STANDARD - 3000K	MAX 700 mA DC - 8,4 W LED - 639 lm - CRI>90 CAVO NERO 7 m - KIT INSTALLAZIONE OPZIONALE NON INCLUSO DIMENSIONI TAGLIO Ø 250 mm SPAZIO MINIMO PER INCASSO 350 mm ORIENTABILE DRIVER LED INCLUSO (700 mA DC) INPUT 220-240 V - 50/60 Hz - IP67 - NON DIMMERABILE BLACK CABLE 7 m - OPTIONAL INSTALLATION KIT NOT INCLUDED CUT-OUT Ø 250 mm MINIMUM SPACE FOR MOUNTING 350 mm ADJUSTABLE INCLUDES LED DRIVER (700 mA DC) INPUT 220-240 V - 50/60 Hz - IP67 - NOT DIMMABLE
173900-27	STANDARD - 2700K	

KIT INSTALLAZIONE OPZIONALI / OPTIONAL INSTALLATION KITS

177300	STANDARD	TIRAFONDO INSTALLAZIONE / INSTALLATION ANCHORING BOLT

ACCESSORI OPZIONALI / OPTIONAL ACCESSORIES

185104	NERO OPACO / MATT BLACK - 3000K	TESTA LED SUPPLEMENTARE / ADDITIONAL LED HEAD MAX 700 mA DC - 8,4 W LED - 639 lm - CRI>90 KIT INSTALLAZIONE OBBLIGATORIO NON INCLUSO / COMPULSORY INSTALLATION KIT NOT INCLUDED
185104-27	NERO OPACO / MATT BLACK - 2700K	

KIT INSTALLAZIONE OBBLIGATORIO PER TESTA LED SUPPLEMENTARE / COMPULSORY INSTALLATION KIT FOR ADDITIONAL LED HEAD

51490060	STANDARD	DRIVER LED INPUT 220-240 V - 50/60 Hz - OUTPUT 700 mA DC - 14 W - IP67 NON DIMMERABILE - NOT DIMMABLE