






The sizes are expressed in millimeters / inches.



19630303	MATT WHITE - 3000K	MAX 400 mA DC - 12 W LED - 589 lm - CRI>95 PLASTERBOARD CUT-OUT 115 x 105 mm MINIMUM SPACE FOR MOUNTING 130 mm ADJUSTABLE - OPTIONAL LED MODULE ACCESSORIES NOT INCLUDED INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - PUSH - 1-10 V DIMMABLE
19630303-27	MATT WHITE - 2700K	
19633403	MATT WHITE - BLACK BICOLOUR - 3000K	
19633403-27	MATT WHITE - BLACK BICOLOUR - 2700K	
19100303	MATT WHITE - 3000K	MAX 400 mA DC - 12 W LED - 589 lm - CRI>95 PLASTERBOARD CUT-OUT 115 x 105 mm MINIMUM SPACE FOR MOUNTING 130 mm ADJUSTABLE - OPTIONAL LED MODULE ACCESSORIES NOT INCLUDED INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - DALI DIMMABLE
19100303-27	MATT WHITE - 2700K	
19103403	MATT WHITE - BLACK BICOLOUR - 3000K	
19103403-27	MATT WHITE - BLACK BICOLOUR - 2700K	

“POINT SOURCE OPTICS” OPTIONAL LED MODULE ACCESSORIES FOR UNIFORM AND HIGH INTENSITY BEAMS

5158002	STANDARD	FILTER - MR16 - 25°
5158003	STANDARD	FILTER - MR16 - 36°
5158004	STANDARD	DARKLIGHT - MR16






The sizes are expressed in millimeters.




DESIGN 2016
LAMPADA DA INCASSO DA SOFFITTO - METALLO
RECESSED CEILING LAMP - METAL

MINI BIT

CE IP 20



196303	BIANCO OPACO / MATT WHITE - 3000K	MAX 400 mA DC - 12 W LED - 589 lm - CRI> 95 DIMENSIONI TAGLIO CARTONGESSO 115 x 105 mm SPAZIO MINIMO PER INCASSO 130 mm ORIENTABILE - DRIVER LED INCLUSO INPUT 110-240 V - 50/60 Hz - DIMMERABILE PUSH - 1-10 V ACCESSORI OPZIONALI MODULO LED NON INCLUSI PLASTERBOARD CUT-OUT 115 x 105 mm MINIMUM SPACE FOR MOUNTING 130 mm ADJUSTABLE - INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - PUSH - 1-10 V DIMMABLE OPTIONAL LED MODULE ACCESSORIES NOT INCLUDED
196303-27	BIANCO OPACO / MATT WHITE - 2700K	
196334	BIANCO - NERO OPACO BICOLORE / MATT WHITE - BLACK BICOLOUR - 3000K	
196334-27	BIANCO - NERO OPACO BICOLORE / MATT WHITE - BLACK BICOLOUR - 2700K	
191003	BIANCO OPACO / MATT WHITE - 3000K	MAX 400 mA DC - 12 W LED - 589 lm - CRI> 95 DIMENSIONI TAGLIO CARTONGESSO 115 x 105 mm SPAZIO MINIMO PER INCASSO 130 mm ORIENTABILE - DRIVER LED INCLUSO INPUT 110-240 V - 50/60 Hz - DIMMERABILE DALI ACCESSORI OPZIONALI MODULO LED NON INCLUSI PLASTERBOARD CUT-OUT 115 x 105 mm MINIMUM SPACE FOR MOUNTING 130 mm ADJUSTABLE - INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - DALI DIMMABLE OPTIONAL LED MODULE ACCESSORIES NOT INCLUDED
191003-27	BIANCO OPACO / MATT WHITE - 2700K	
191034	BIANCO - NERO OPACO BICOLORE / MATT WHITE - BLACK BICOLOUR - 3000K	
191034-27	BIANCO - NERO OPACO BICOLORE / MATT WHITE - BLACK BICOLOUR - 2700K	



1A06703	BIANCO OPACO / MATT WHITE	100-240 V - 50/60 Hz - MAX 10 W LED - GU10
1A06734	BIANCO - NERO OPACO BICOLORE / MATT WHITE - BLACK BICOLOUR	DIMENSIONI TAGLIO CARTONGESSO 115 x 105 mm
		SPAZIO MINIMO PER INCASSO 130 mm
		ORIENTABILE - LAMPADINA NON INCLUSA
		ACCESSORI OPZIONALI LAMPADINA NON INCLUSI
		PLASTERBOARD CUT-OUT 115 x 105 mm
		MINIMUM SPACE FOR MOUNTING 130 mm
		ADJUSTABLE - BULB NOT INCLUDED
		OPTIONAL BULB ACCESSORIES NOT INCLUDED

DESIGN 2016
LAMPADA DA INCASSO DA SOFFITTO - METALLO
RECESSED CEILING LAMP - METAL


CE IP 20    1.0 m

MINI BIT 51

CODE	SOCKET	TENSION	WATTAGE	BEAM ANGLE (°)	TEMPERATURE (K)	SOURCE LUMENS	BULB EFFICIENCY	CRI (Ra)	DIMMABLE	PRODUCT REFERENCE
------	--------	---------	---------	----------------	-----------------	---------------	-----------------	----------	----------	-------------------

LAMPADINE LED / LED BULBS

	50330500	GU10	220-240 V	5,5 W	25°	3000K	375 lm	A +	97	X	DOT P DOT PL DOT R DOT SISTEMA MINI 51 MINI BIT 51 MINI PL TRICK TRACK
	50330740	GU10	220-240 V	5 W	120°	3000K	550 lm	A +	80		Q
	50330450	GU4	12 V	3,5 W	25°	2700K	210 lm	A +	80		OVO OVONELPIATTO
	50330530	GU5,3	12 V	6,5 W	36°	3000K	440 lm	A +	97	X	BUCO R
	50050490	E27	220-240 V	10 W	-	3000K	1055 lm	A +	>80	X	ABA 45 ABA 120 EDI SON
	50330650	E27	220-240 V	13 W	-	2700K	1521 lm	A +	90	X	LENTA MOON 60 MOON 60 DE MOON 80 MOON 200 MOON F MOON T SHOJI SHOJI OUTDOOR
	50041470	E27	220-240 V	21 W	-	2700K	2452 lm	A +	≥80	X	MOON 120
	50330730	E27	220-240 V	9,5 W	25°	3000K	760 lm	A +	80	X	CHILLOUT NEURO
	50330720	R7s	220-240 V	7,5 W	-	3000K	950 lm	A + +	80		HAKO PL ECO LED
	50041390	R7s	220-240 V	11,5 W	-	2700K	1500 lm	A + +	80		HAKO PL ECO LED
	51970010	R7s	220-240 V	11 W	-	3000K	1200 lm	A +	80		TOAST ECO LED
	50000036	R7s	220-240 V	10 W	-	2700K	1250 lm	A +	80		TOAST ECO LED

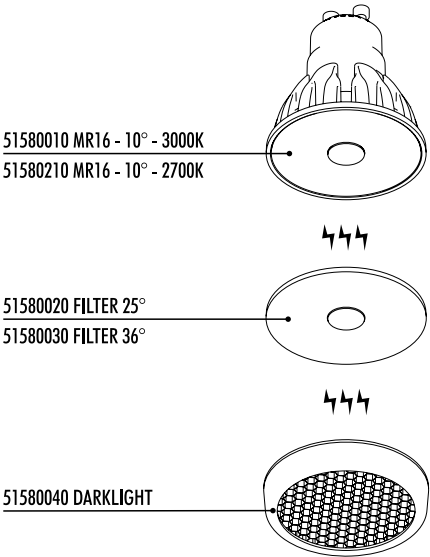

	CODE	SOCKET	TENSION	WATTAGE	BEAM ANGLE (°)	TEMPERATURE (K)	SOURCE LUMENS	BULB EFFICIENCY	CRI (Ra)	DIMMABLE	PRODUCT REFERENCE
🔔	LAMPADINE LED SORAA MR16 - DIMMERABILE IGBT / SORAA LED BULBS MR16 - IGBT DIMMABLE										
	51580010	GU10	230 V	7,5 W	10°	3000K	410 lm	A	95	X	DOT P DOT PL DOT R DOT SISTEMA MINI 51 MINI BIT 51 MINI PL TRICK TRACK
	51580210	GU10	230 V	7,5 W	10°	2700K	390 lm	A	95	X	

ACCESSORI "POINT SOURCE OPTICS" PER GENERARE FASCI UNIFORMI E DI ALTA INTENSITA' / "POINT SOURCE OPTICS" ACCESSORIES FOR UNIFORM AND HIGH INTENSITY BEAMS

51580020	FILTER - MR16	25°	DOT FRAMELESS DOT P DOT PL DOT R DOT SISTEMA
51580030	FILTER - MR16	36°	MINI MINI 51 MINI BIT MINI BIT 51 MINI PL TRICK TRACK
51580040	DARKLIGHT - MR16	-	

MODULI LED / LED MODULES

50041500	500 mA DC	18 W	15°	3000K	1829 lm	A+	90	X	PUNTO PUNTO PL PUNTO 2 PL SPOT SPOT SISTEMA
50041510	500 mA DC	18 W	15°	2700K	1719 lm	A+	90	X	
50041350	500 mA DC	18 W	24°	3000K	1869 lm	A+	90	X	
50041450	500 mA DC	18 W	24°	2700K	1759 lm	A+	90	X	
50041500	350 mA DC	12,6 W	15°	3000K	1350 lm	A+	90	X	SPOT ENDLESS SPOT ENDLESS IOT
50041510	350 mA DC	12,6 W	15°	2700K	1269 lm	A+	90	X	
50041350	350 mA DC	12,6 W	24°	3000K	1361 lm	A+	90	X	
50041450	350 mA DC	12,6 W	24°	2700K	1281 lm	A+	90	X	

ACCESSORI OPZIONALI MODULO LED / OPTIONAL LED MODULE ACCESSORIES

1A12100	STANDARD	DARKLIGHT	PUNTO PUNTO PL PUNTO 2 PL SPOT SPOT ENDLESS SPOT ENDLESS IOT SPOT SISTEMA
---------	----------	-----------	---