




The sizes are expressed in millimeters / inches.

DESIGN DAVIDE GROPPI - 2015
RECESSED CEILING LAMP - METAL

CERTIFICATED 1972XX03 PRODUCT 

IP 20/IP 65

NULLA 25

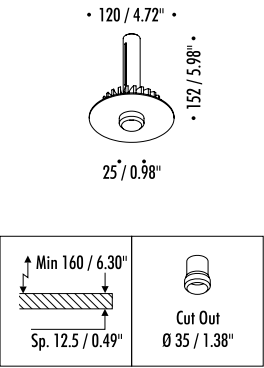

1A0540003	STANDARD DIM PUSH - 1-10 V - 3000K	24 V DC - 6 W LED - 392 lm - CRI>90 VISIBLE HOLE Ø 25 mm - LUMINAIRE REMOVABLE FOR MAINTENANCE COMPULSORY INSTALLATION KIT NOT INCLUDED INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - PUSH - 1-10 V DIMMABLE
1A0540003-27	STANDARD DIM PUSH - 1-10 V - 2700K	
1A0550003	STANDARD DIM DALI - 3000K	24 V DC - 6 W LED - 392 lm - CRI>90 VISIBLE HOLE Ø 25 mm - LUMINAIRE REMOVABLE FOR MAINTENANCE COMPULSORY INSTALLATION KIT NOT INCLUDED INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - DALI DIMMABLE
1A0550003-27	STANDARD DIM DALI - 2700K	
1A0560003	STANDARD DIM TRIAC - 3000K	24 V DC - 6 W LED - 392 lm - CRI>90 VISIBLE HOLE Ø 25 mm - LUMINAIRE REMOVABLE FOR MAINTENANCE COMPULSORY INSTALLATION KIT NOT INCLUDED INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - TRIAC / IGBT DIMMABLE
1A0560003-27	STANDARD DIM TRIAC - 2700K	





DESIGN DAVIDE GROPPÌ - 2019
RECESSED CEILING LAMP - METAL



IP 20/IP 65


NULLA 25 T24



1A1010003	STANDARD TITLE 24	MAX 500 mA DC - 5,6 W LED - 357 lm - 3000K - CRI>90 VISIBLE HOLE Ø 25 mm - LUMINAIRE REMOVABLE FOR MAINTENANCE COMPULSORY INSTALLATION KIT NOT INCLUDED DRIVER LED NOT INCLUDED (PER MIN 2 UNITS - MAX 4 UNITS)


COMPULSORY INSTALLATION KITS

52000010	STANDARD TITLE 24	DRIVER LED (PER MIN 2 UNITS - MAX 4 UNITS) INPUT 120-250 V - 50/60 Hz - OUTPUT 500 mA DC - 50 W - IP20 1-10 V DIMMABLE

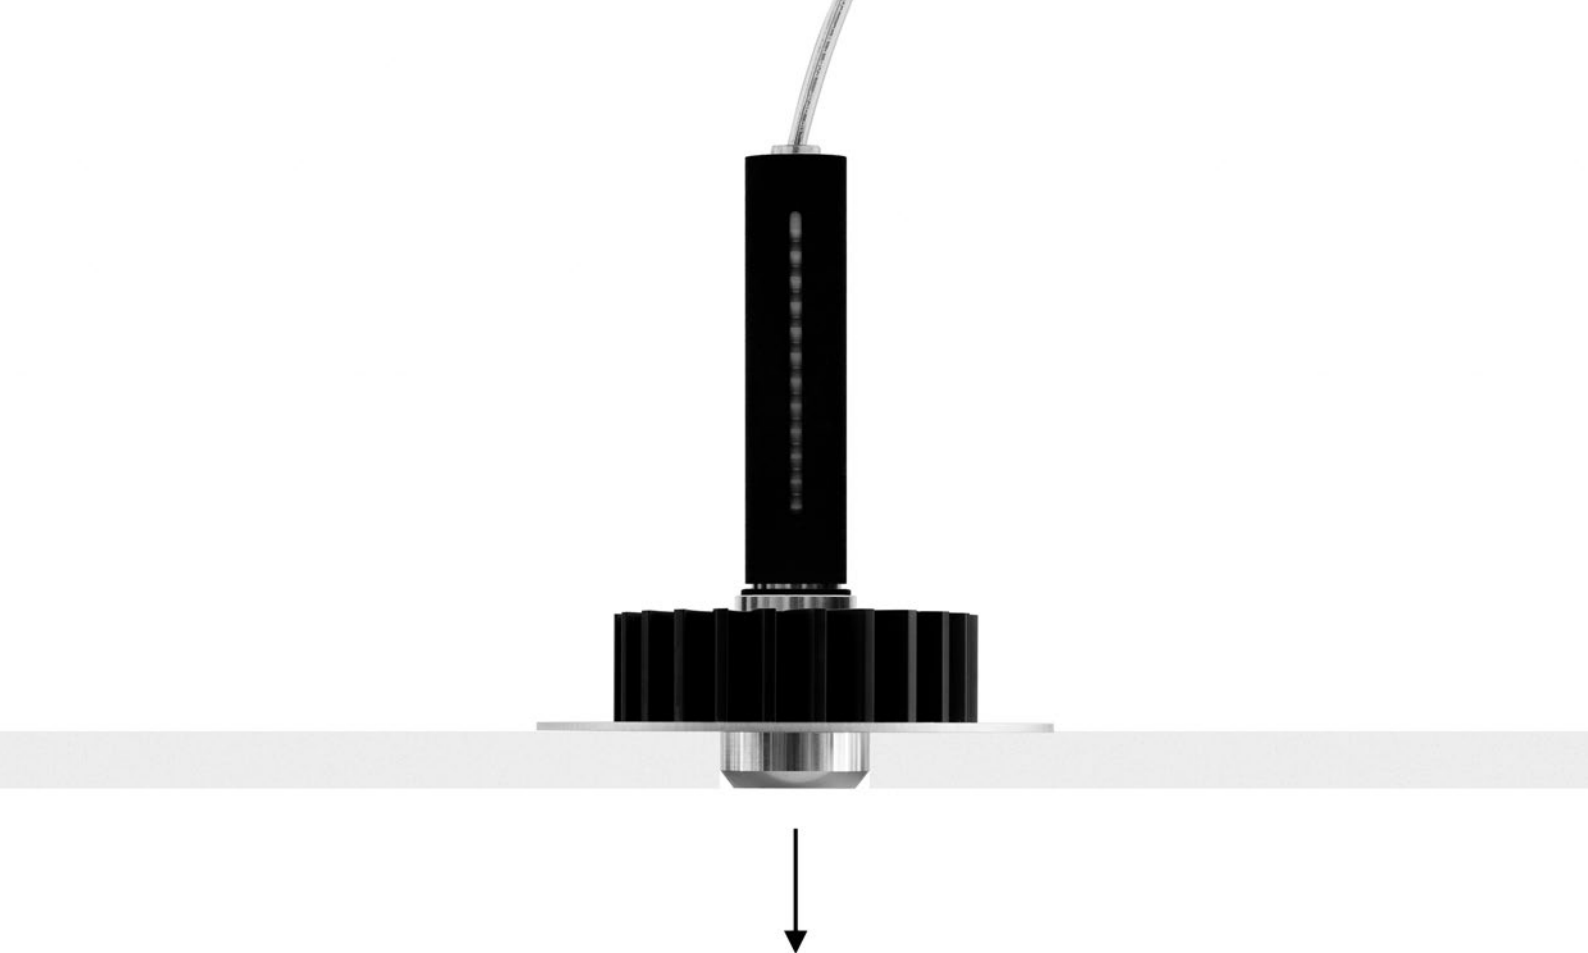


LUMINAIRE REMOVABLE FOR MAINTENANCE


DIM 1 - 10 V - PUSH
DRIVER DIMENSION




DIM DALI
DRIVER DIMENSION





DIM TRIAC
DRIVER DIMENSION



DIM 1 - 10 V - T24
DRIVER DIMENSION



CONTROLLER DIMENSION

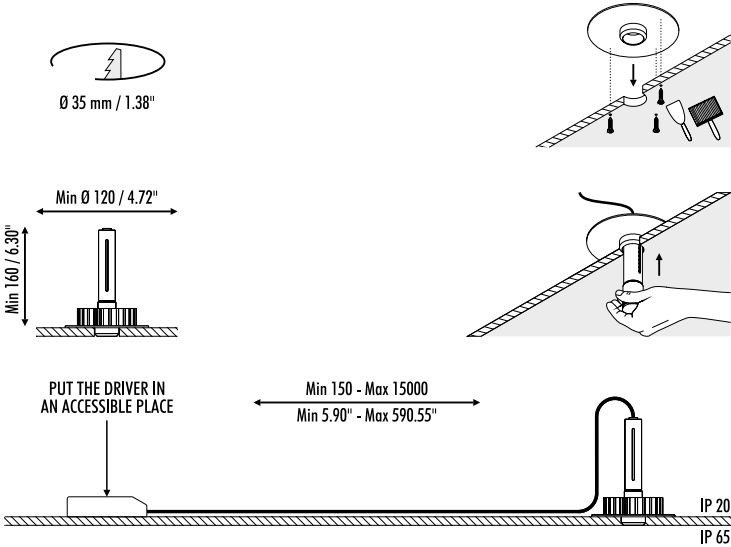

COMPULSORY INSTALLATION KITS



18250003	STANDARD	PLASTERBOARD FLANGE 12,5 mm PLASTERBOARD CUT-OUT Ø 35 mm MINIMUM SPACE FOR MOUNTING 160 mm




The sizes are expressed in millimeters.

DESIGN DAVIDE GROPPI - 2015
LAMPADA DA INCASSO DA SOFFITTO - METALLO
RECESSED CEILING LAMP - METAL



CE  IP 20/IP 65



1A05400	STANDARD DIM PUSH - 1-10 V - 3000K	24 V DC - 6 W LED - 392 lm - CRI>90
1A05400-27	STANDARD DIM PUSH - 1-10 V - 2700K	FORO VISIBILE Ø 25 mm - APPARECCHIO ESTRAIBILE PER MANUTENZIONE
		KIT INSTALLAZIONE OBBLIGATORIO NON INCLUSO
		DRIVER LED INCLUSO INPUT 110-240 V - 50/60 Hz - DIMMERABILE PUSH - 1-10 V
		VISIBLE HOLE Ø 25 mm - LUMINAIRE REMOVABLE FOR MAINTENANCE
		COMPULSORY INSTALLATION KIT NOT INCLUDED
		INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - PUSH - 1-10 V DIMMABLE
1A05500	STANDARD DIM DALI - 3000K	24 V DC - 6 W LED - 392 lm - CRI>90
1A05500-27	STANDARD DIM DALI - 2700K	FORO VISIBILE Ø 25 mm - APPARECCHIO ESTRAIBILE PER MANUTENZIONE
		KIT INSTALLAZIONE OBBLIGATORIO NON INCLUSO
		DRIVER LED INCLUSO INPUT 110-240 V - 50/60 Hz - DIMMERABILE DALI
		VISIBLE HOLE Ø 25 mm - LUMINAIRE REMOVABLE FOR MAINTENANCE
		COMPULSORY INSTALLATION KIT NOT INCLUDED
		INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - DALI DIMMABLE
1A05600	STANDARD DIM TRIAC - 3000K	24 V DC - 6 W LED - 392 lm - CRI>90
1A05600-27	STANDARD DIM TRIAC - 2700K	FORO VISIBILE Ø 25 mm - APPARECCHIO ESTRAIBILE PER MANUTENZIONE
		KIT INSTALLAZIONE OBBLIGATORIO NON INCLUSO
		DRIVER LED INCLUSO INPUT 110-240 V - 50/60 Hz - DIMMERABILE TRIAC / IGBT
		VISIBLE HOLE Ø 25 mm - LUMINAIRE REMOVABLE FOR MAINTENANCE
		COMPULSORY INSTALLATION KIT NOT INCLUDED
		INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - TRIAC / IGBT DIMMABLE

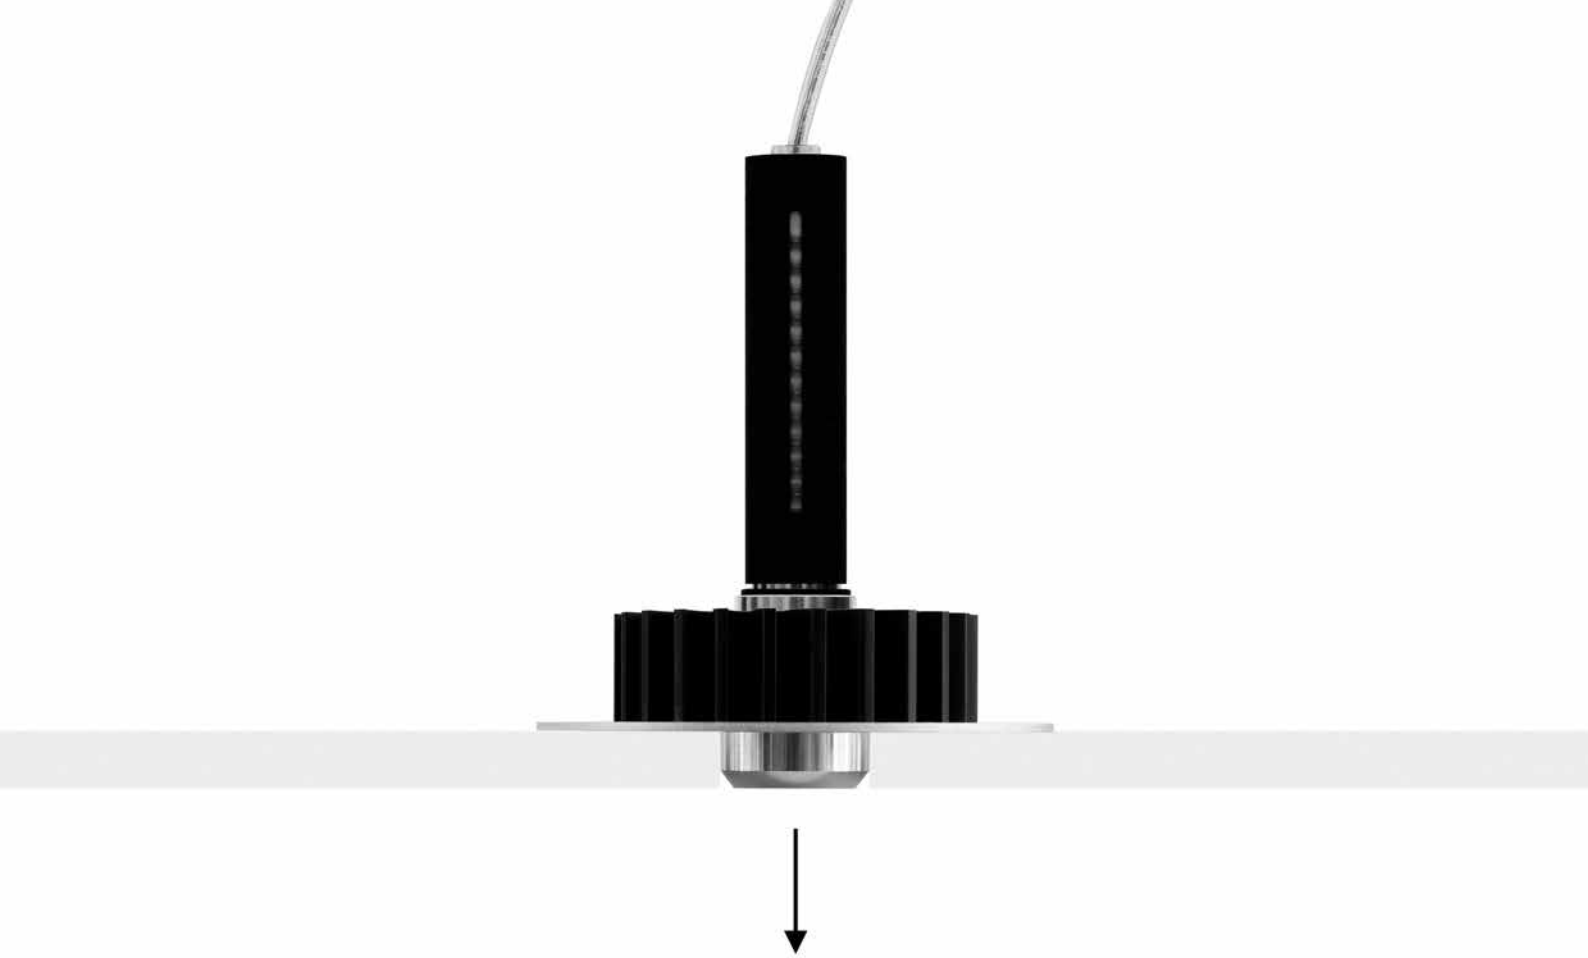

APPARECCHIO ESTRAIBILE PER MANUTENZIONE
LUMINAIRE REMOVABLE FOR MAINTENANCE

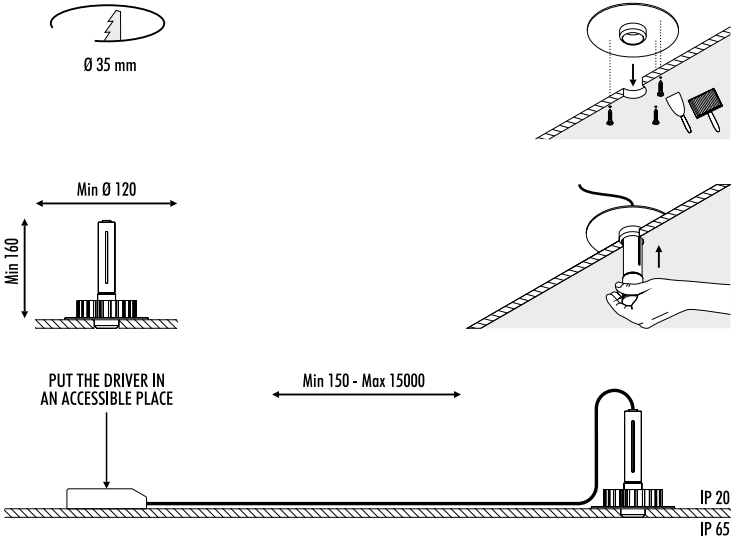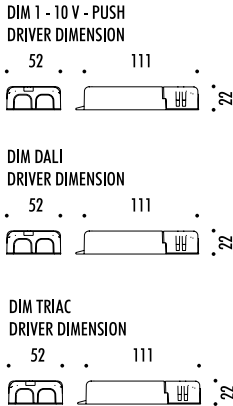

KIT INSTALLAZIONE OBBLIGATORI / COMPULSORY INSTALLATION KITS

182500	STANDARD	FLANGIA PER CARTONGESSO 12,5 mm DIMENSIONI TAGLIO CARTONGESSO Ø 35 mm SPAZIO MINIMO PER INCASSO 160 mm
		PLASTERBOARD FLANGE 12,5 mm PLASTERBOARD CUT-OUT Ø 35 mm MINIMUM SPACE FOR MOUNTING 160 mm

