



The sizes are expressed in millimeters / inches.


DESIGN 2021
RECESSED CEILING LAMP - GLASS - METAL

FLEXALIGHTING CERTIFICATED
7A0-VENUS PRODUCT



IP 67

BUCO 58

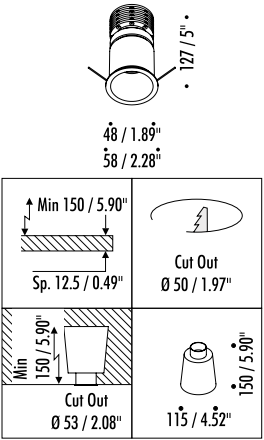

1A1490303	MATT WHITE - 3000K	24 V DC - 7 W LED - 36° 3000K - 546 lm - CRI > 90 / 2700K - 495 lm - CRI > 90 COMPULSORY INSTALLATION KIT NOT INCLUDED PLASTERBOARD CUT-OUT Ø 50 mm MINIMUM SPACE FOR MOUNTING 150 mm
1A1490303-27	MATT WHITE - 2700K	
1A1490403	MATT BLACK - 3000K	
1A1490403-27	MATT BLACK - 2700K	

COMPULSORY INSTALLATION KITS

50240990	STANDARD	DRIVER LED INPUT 120 V - 60 Hz - OUTPUT 24 V DC - MAX 15 W - IP68 1-10 V DIMMABLE

OPTIONAL INSTALLATION KITS

1A1500003	STANDARD	INSTALLATION BOX CUT-OUT Ø 53 mm - MINIMUM SPACE FOR MOUNTING 150 mm


1A1660003	STANDARD	DRIVER CONNECTORS IP68 - 2 PIECES



The sizes are expressed in millimeters.

DESIGN 2021
LAMPADA DA INCASSO DA SOFFITTO - METALLO - VETRO
RECESSED CEILING LAMP - METAL - GLASS

CE  IP 67

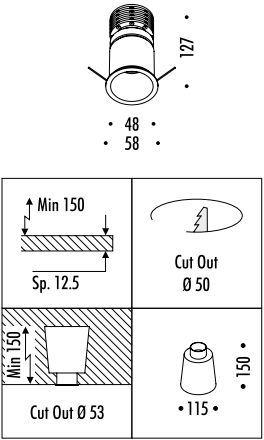

1A14903	BIANCO OPACO / MATT WHITE - 3000K	24 V DC - 7 W LED - 36°
1A14903-27	BIANCO OPACO / MATT WHITE - 2700K	3000K - 546 lm - CRI > 90 / 2700K - 495 lm - CRI > 90
1A14904	NERO OPACO / MATT BLACK - 3000K	KIT INSTALLAZIONE OBBLIGATORIO NON INCLUSO
1A14904-27	NERO OPACO / MATT BLACK - 2700K	DIMENSIONI TAGLIO CARTONGESSO Ø 50 mm
		SPAZIO MINIMO PER INCASSO 150 mm
		COMPULSORY INSTALLATION KIT NOT INCLUDED
		PLASTERBOARD CUT-OUT Ø 50 mm
		MINIMUM SPACE FOR MOUNTING 150 mm

KIT INSTALLAZIONE OBBLIGATORI / COMPULSORY INSTALLATION KITS

51490120	STANDARD	DRIVER LED
		INPUT 220-240 V - 50/60 Hz - OUTPUT 24 V DC - 36 W - IP67
		NON DIMMERABILE - NOT DIMMABLE

KIT INSTALLAZIONE OPZIONALI / OPTIONAL INSTALLATION KITS

1A15000	STANDARD	CASSAFORMA INSTALLAZIONE / INSTALLATION BOX
		DIMENSIONI TAGLIO Ø 53 mm - SPAZIO MINIMO PER INCASSO 150 mm
		CUT-OUT Ø 53 mm - MINIMUM SPACE FOR MOUNTING 150 mm

1A16600	STANDARD	CONNETTORI DRIVER IP68 - 2 PEZZI / DRIVER CONNECTORS IP68 - 2 PIECES