



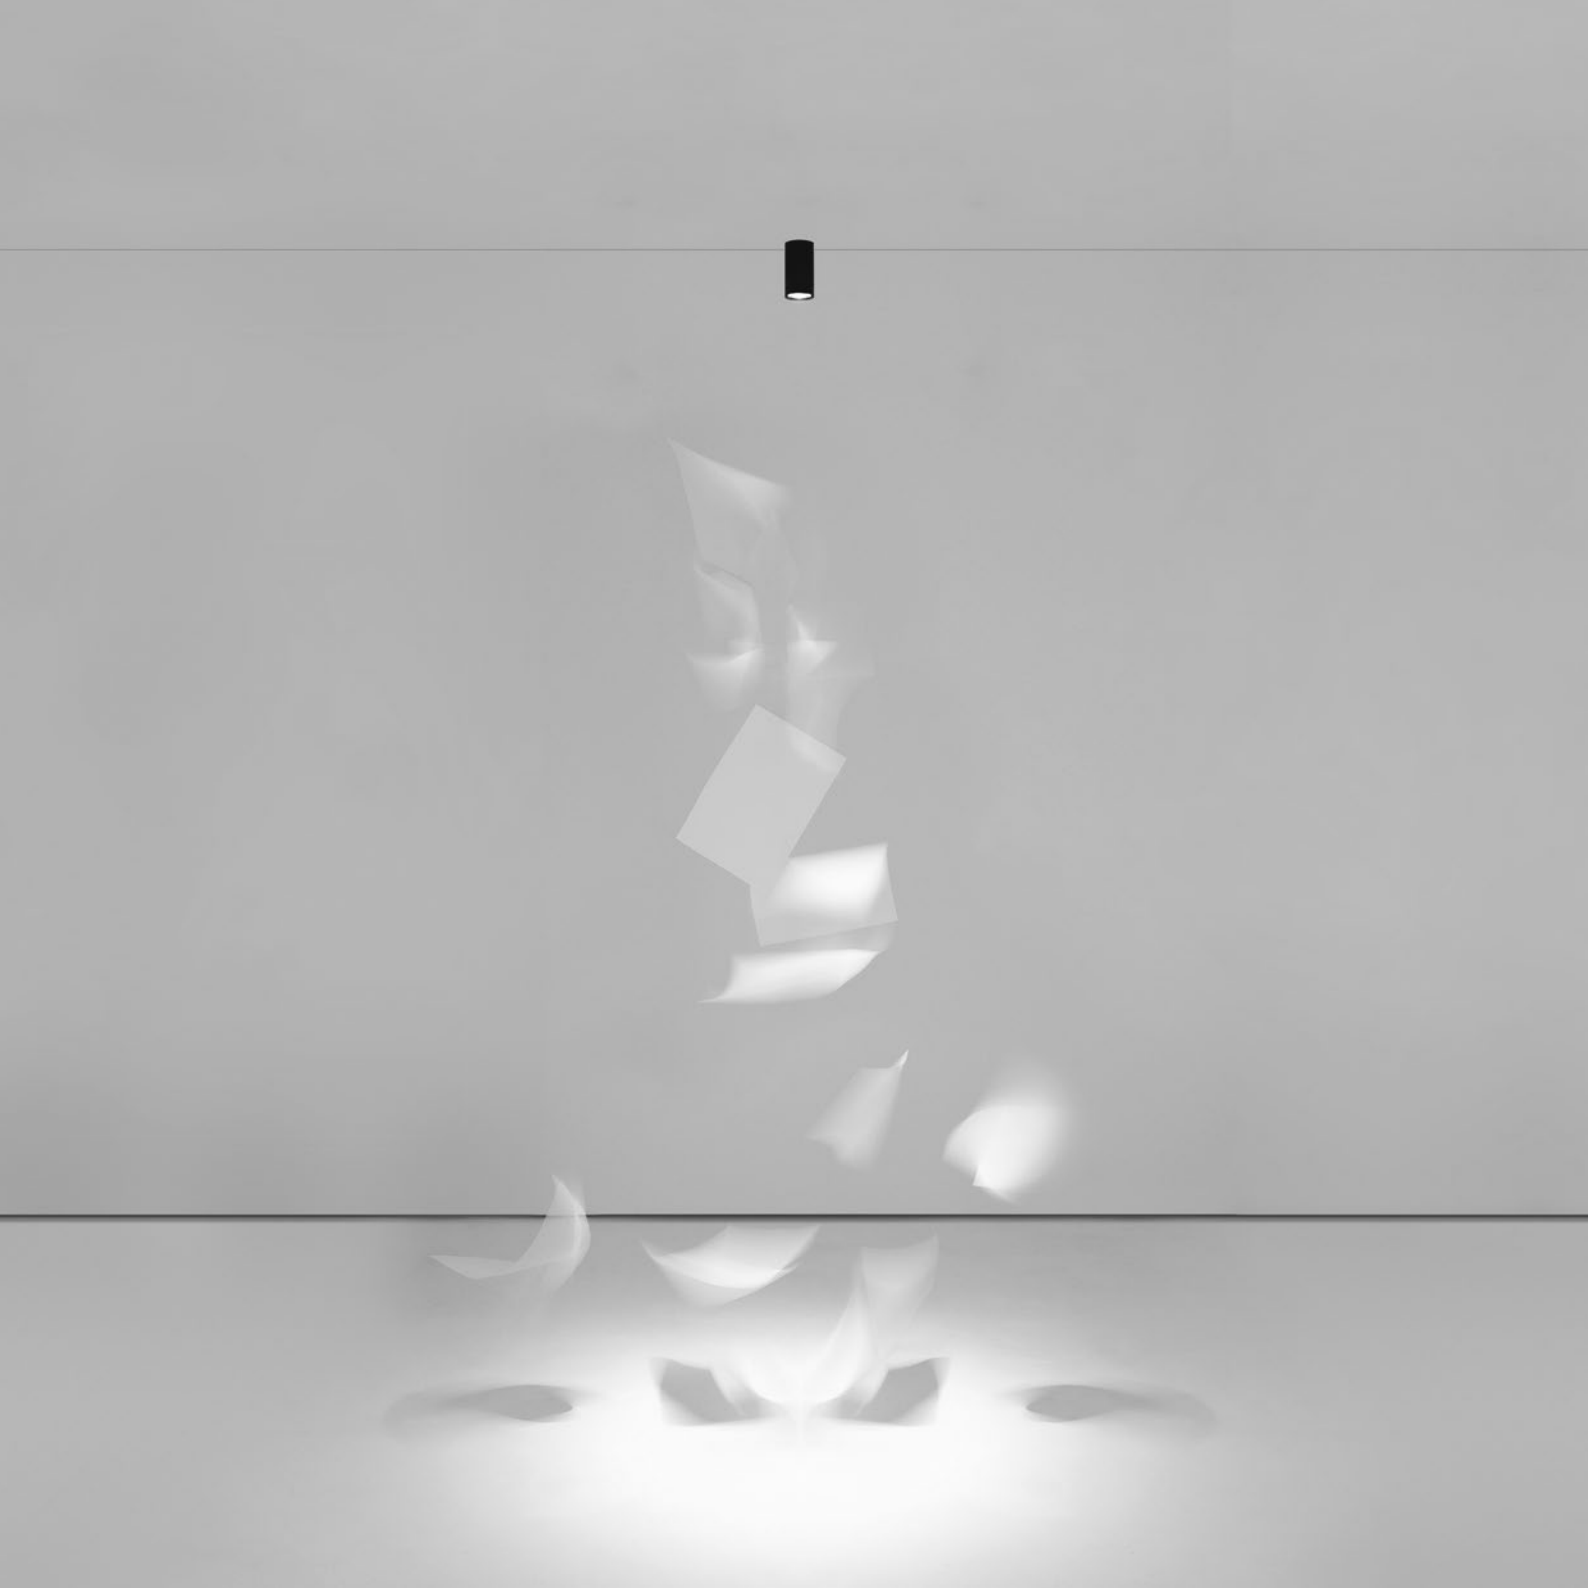


The sizes are expressed in millimeters / inches.

DESIGN DAVIDE GROPPI - 2019
WALL SYSTEM - METAL - PA

OHM ABSOLUTE


TIE ROD

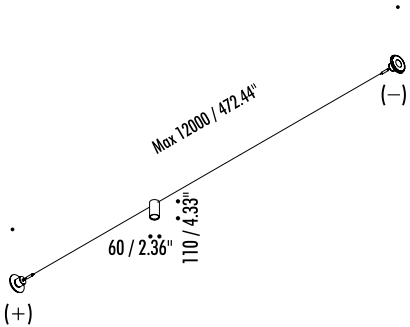


1A0760403	STANDARD NARROW BEAM - 3000K	MAX 350 mA DC - 1 x 3,6 W LED - NARROW BEAM 3000K - 288 lm - CRI > 95 / 2700K - 272 lm - CRI > 95 UNIPOLAR WIRE 12 m - 2 WHITE TIE RODS - MAX 4 SPOT ON UNIPOLAR WIRE COMPULSORY POWER SUPPLY KIT INCLUDED INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - DALI - PUSH - 1-10 V DIMMABLE OPTIONAL ACCESSORIES NOT INCLUDED
1A0760403-27	STANDARD NARROW BEAM - 2700K	
1A0460403	STANDARD MEDIUM BEAM - 3000K	MAX 350 mA DC - 1 x 3,6 W LED - MEDIUM BEAM 3000K - 286 lm - CRI > 95 / 2700K - 270 lm - CRI > 95 UNIPOLAR WIRE 12 m - 2 WHITE TIE RODS - MAX 4 SPOT ON UNIPOLAR WIRE COMPULSORY POWER SUPPLY KIT INCLUDED INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - DALI - PUSH - 1-10 V DIMMABLE OPTIONAL ACCESSORIES NOT INCLUDED
1A0460403-27	STANDARD MEDIUM BEAM - 2700K	

DRIVER DIMENSION


• 79 / 3.11" • • 124 / 4.88" •
22 / 0.87"

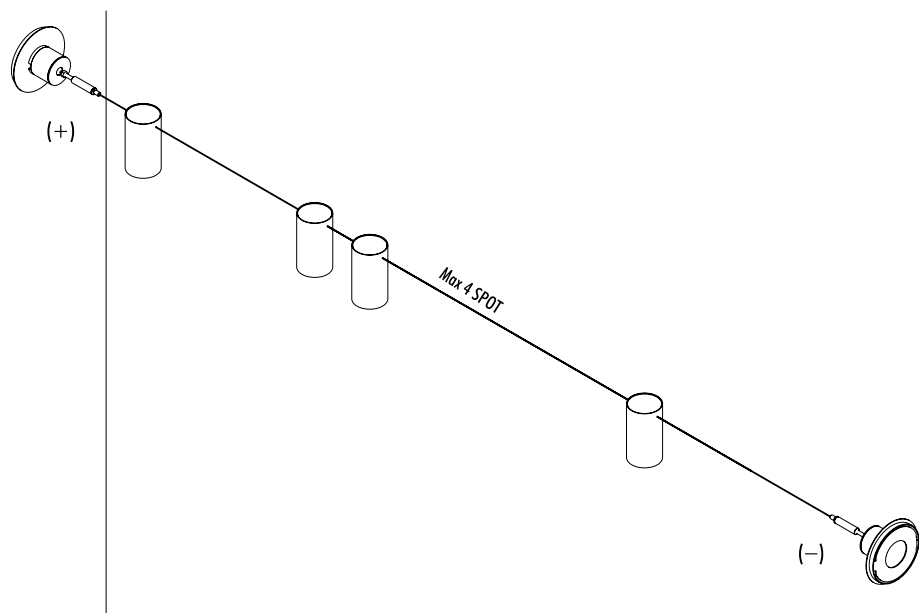



LAYOUT EXAMPLES

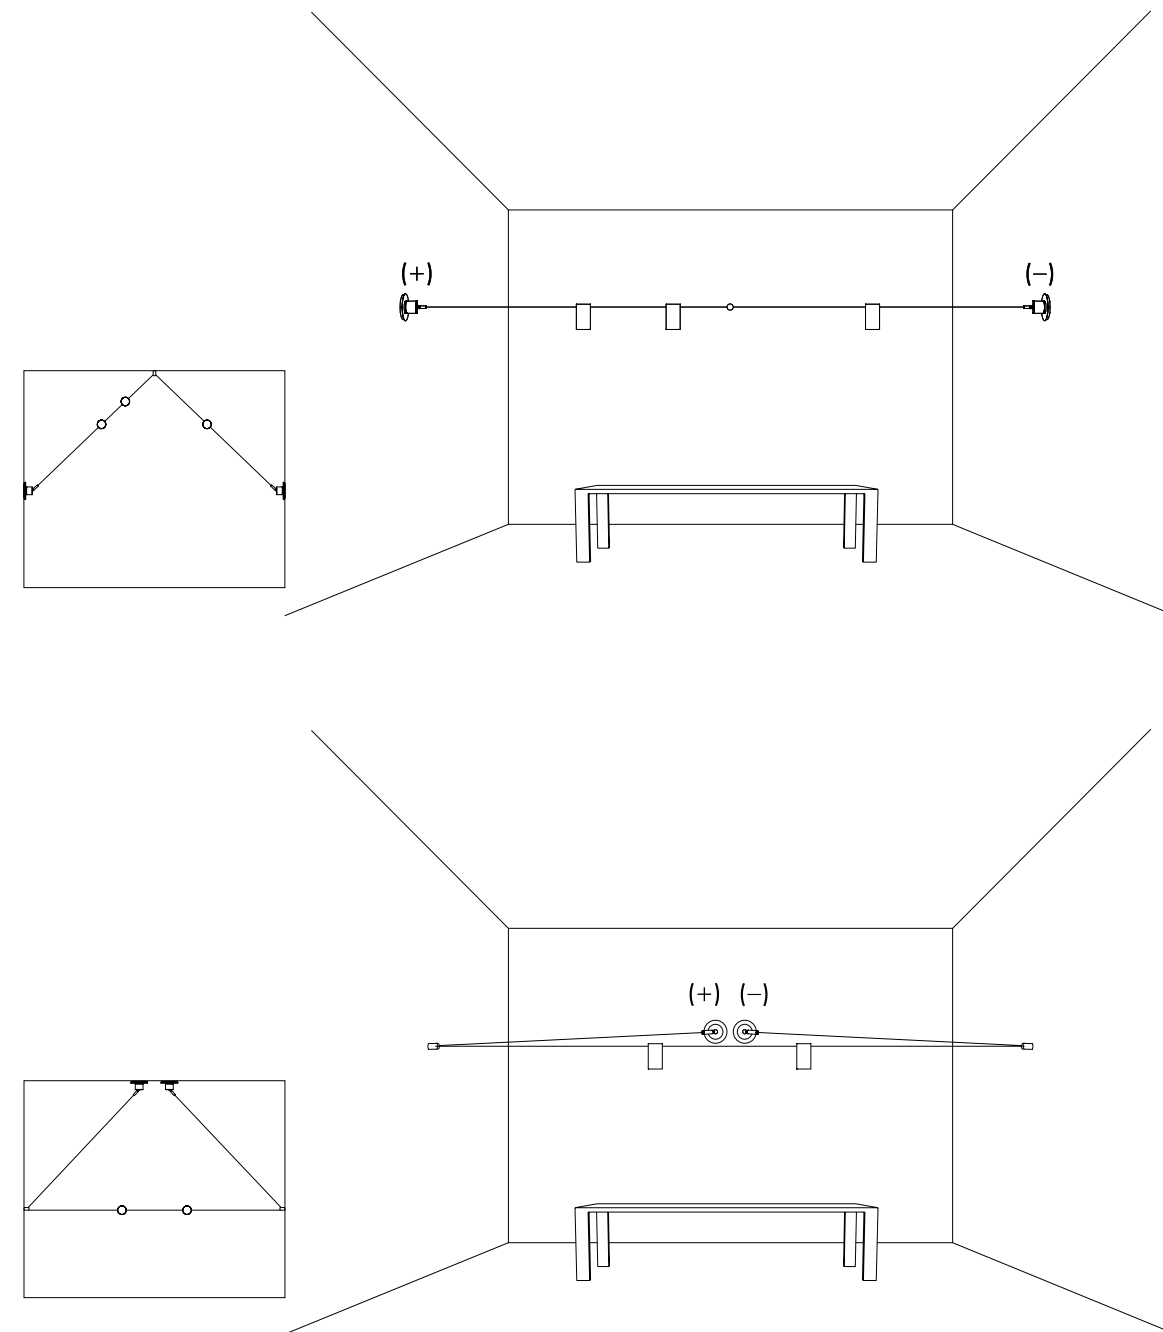




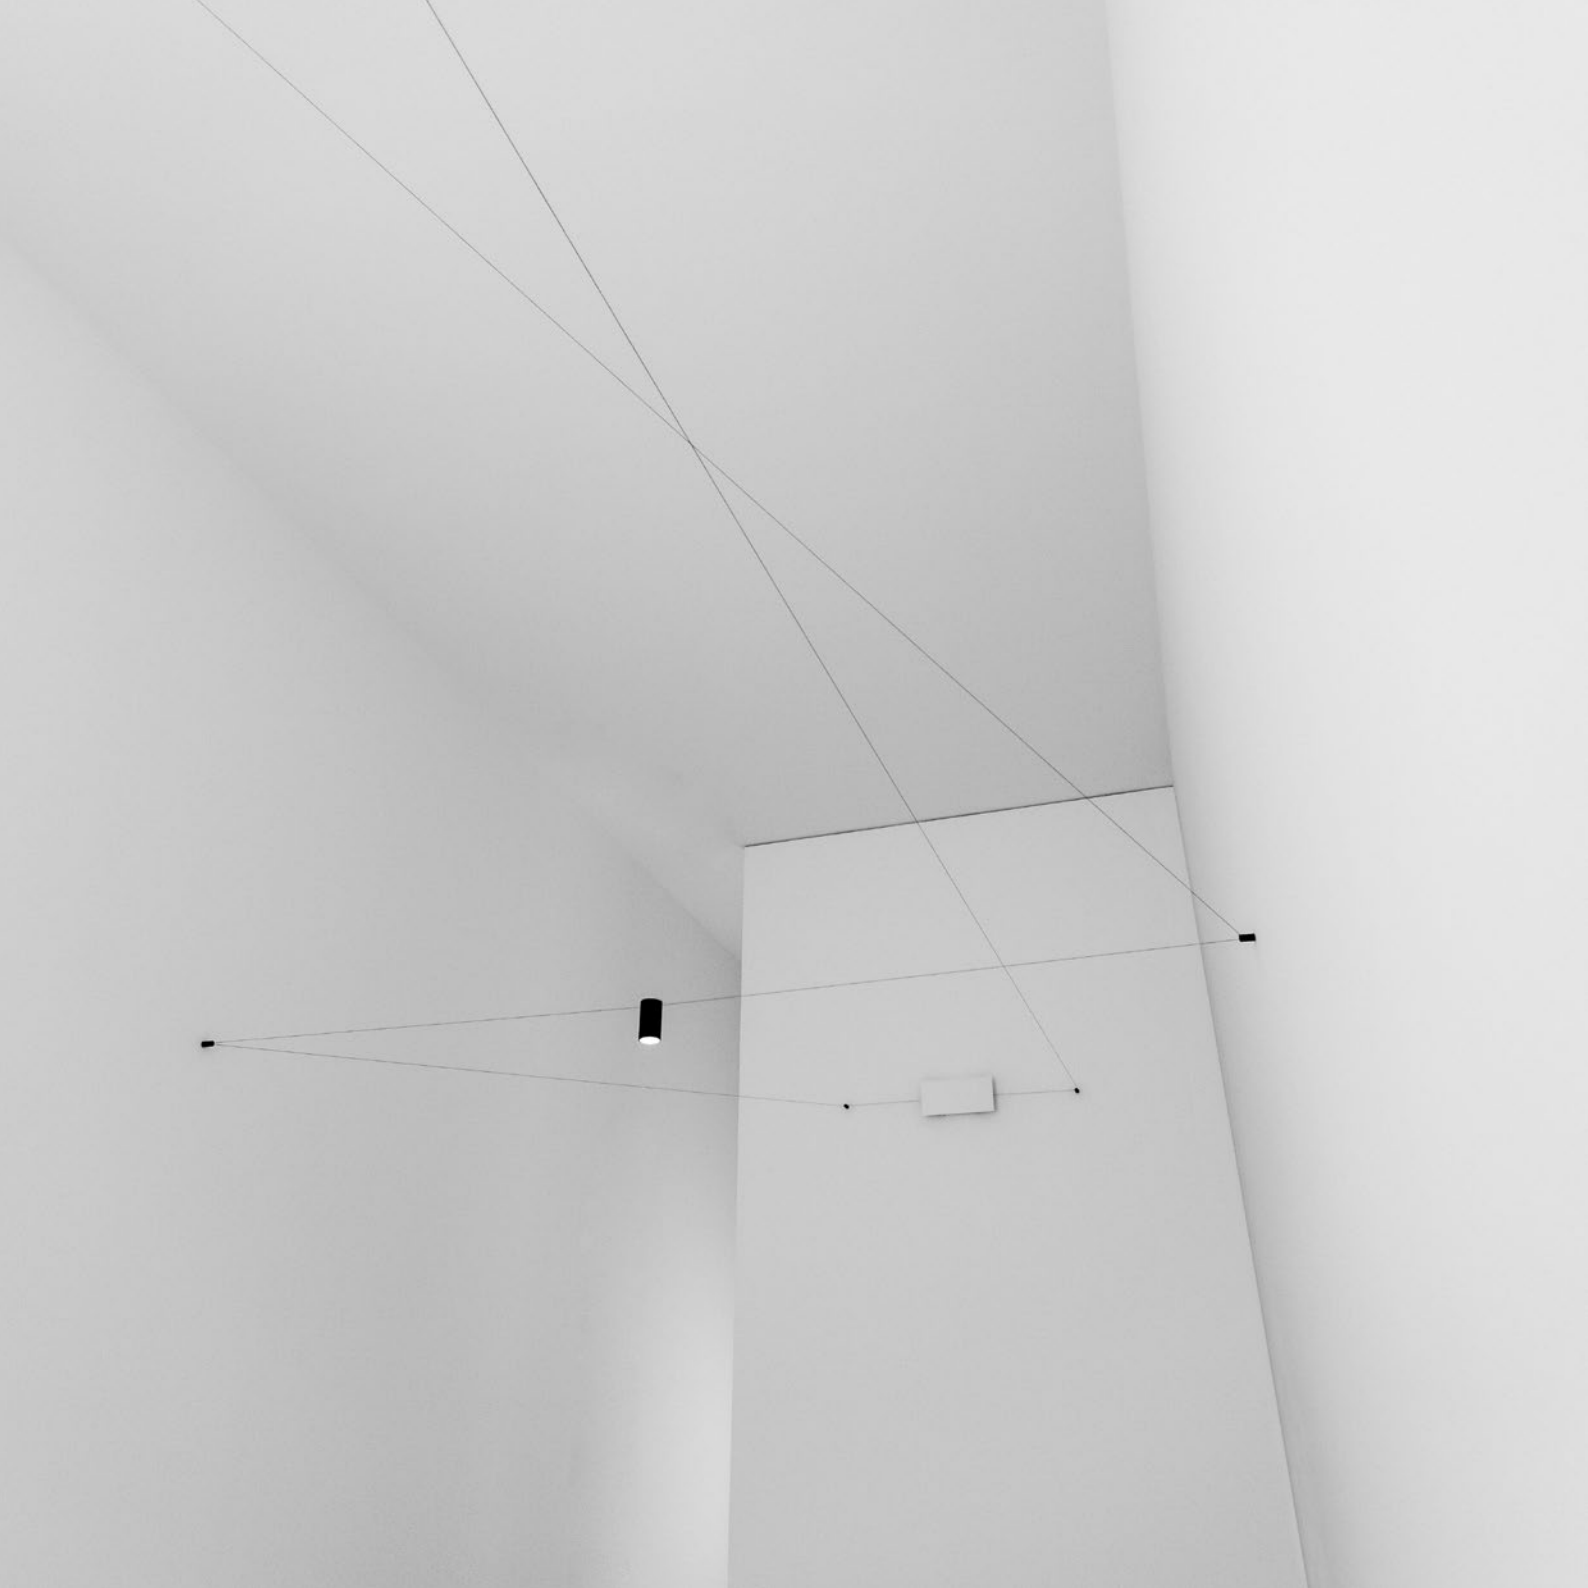


WALL ROSE

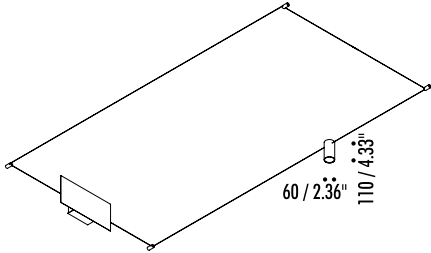


1A0750403	STANDARD NARROW BEAM - 3000K	MAX 350 mA DC - 1 x 3,6 W LED - NARROW BEAM 3000K - 288 lm - CRI > 95 / 2700K - 272 lm - CRI > 95 UNIPOLAR WIRE 24 m - 4 BLACK WIRES GUIDE - MAX 4 SPOT ON UNIPOLAR WIRE WHITE WALL ROSE INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - DALI - PUSH - 1-10 V DIMMABLE OPTIONAL ACCESSORIES NOT INCLUDED
1A0750403-27	STANDARD NARROW BEAM - 2700K	
19780403	STANDARD MEDIUM BEAM - 3000K	MAX 350 mA DC - 1 x 3,6 W LED - MEDIUM BEAM 3000K - 286 lm - CRI > 95 / 2700K - 270 lm - CRI > 95 UNIPOLAR WIRE 24 m - 4 BLACK WIRES GUIDE - MAX 4 SPOT ON UNIPOLAR WIRE WHITE WALL ROSE INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - DALI - PUSH - 1-10 V DIMMABLE OPTIONAL ACCESSORIES NOT INCLUDED
19780403-27	STANDARD MEDIUM BEAM - 2700K	

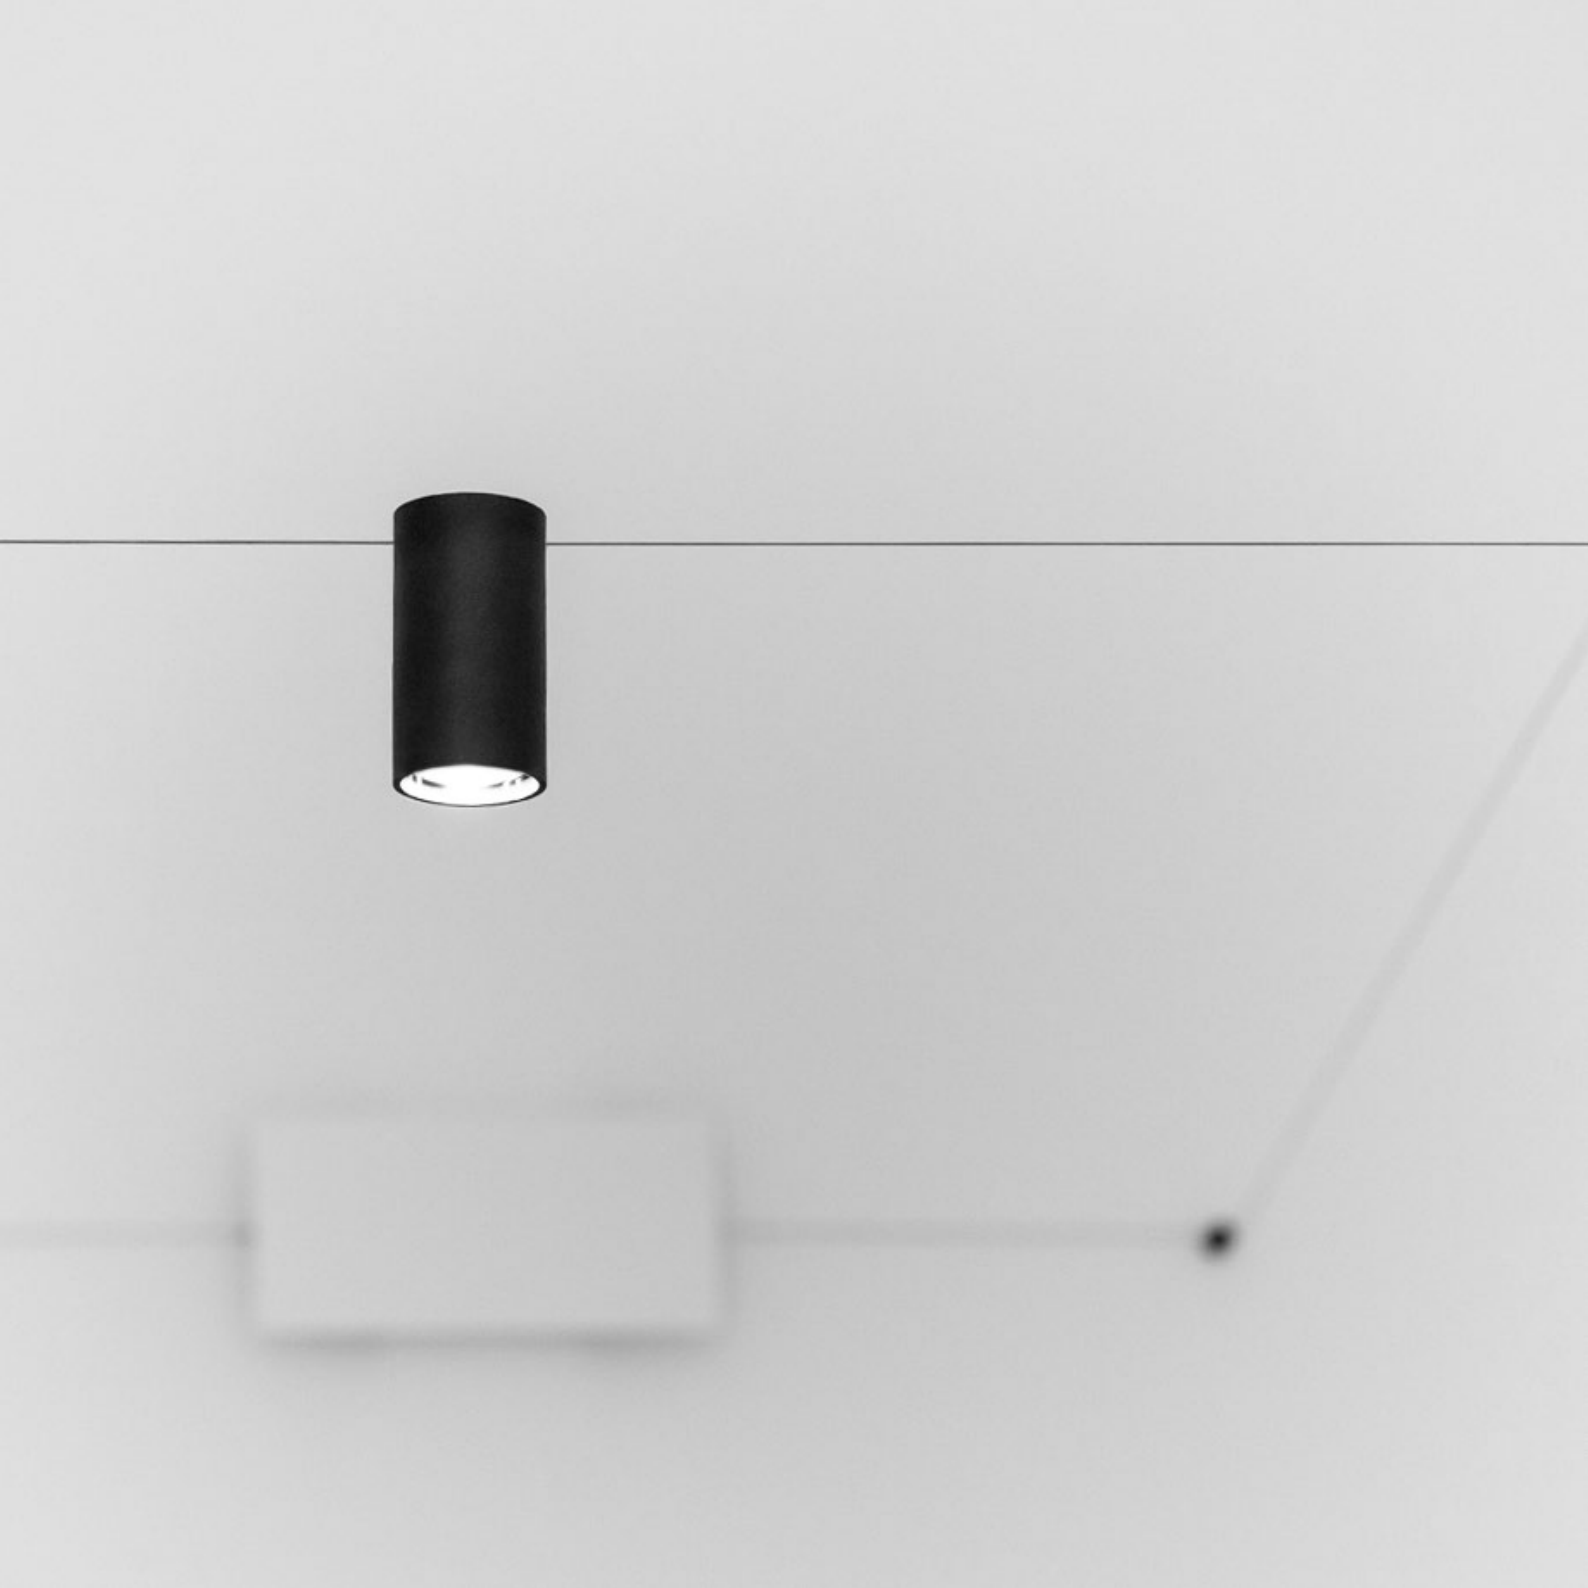


LAYOUT EXAMPLES

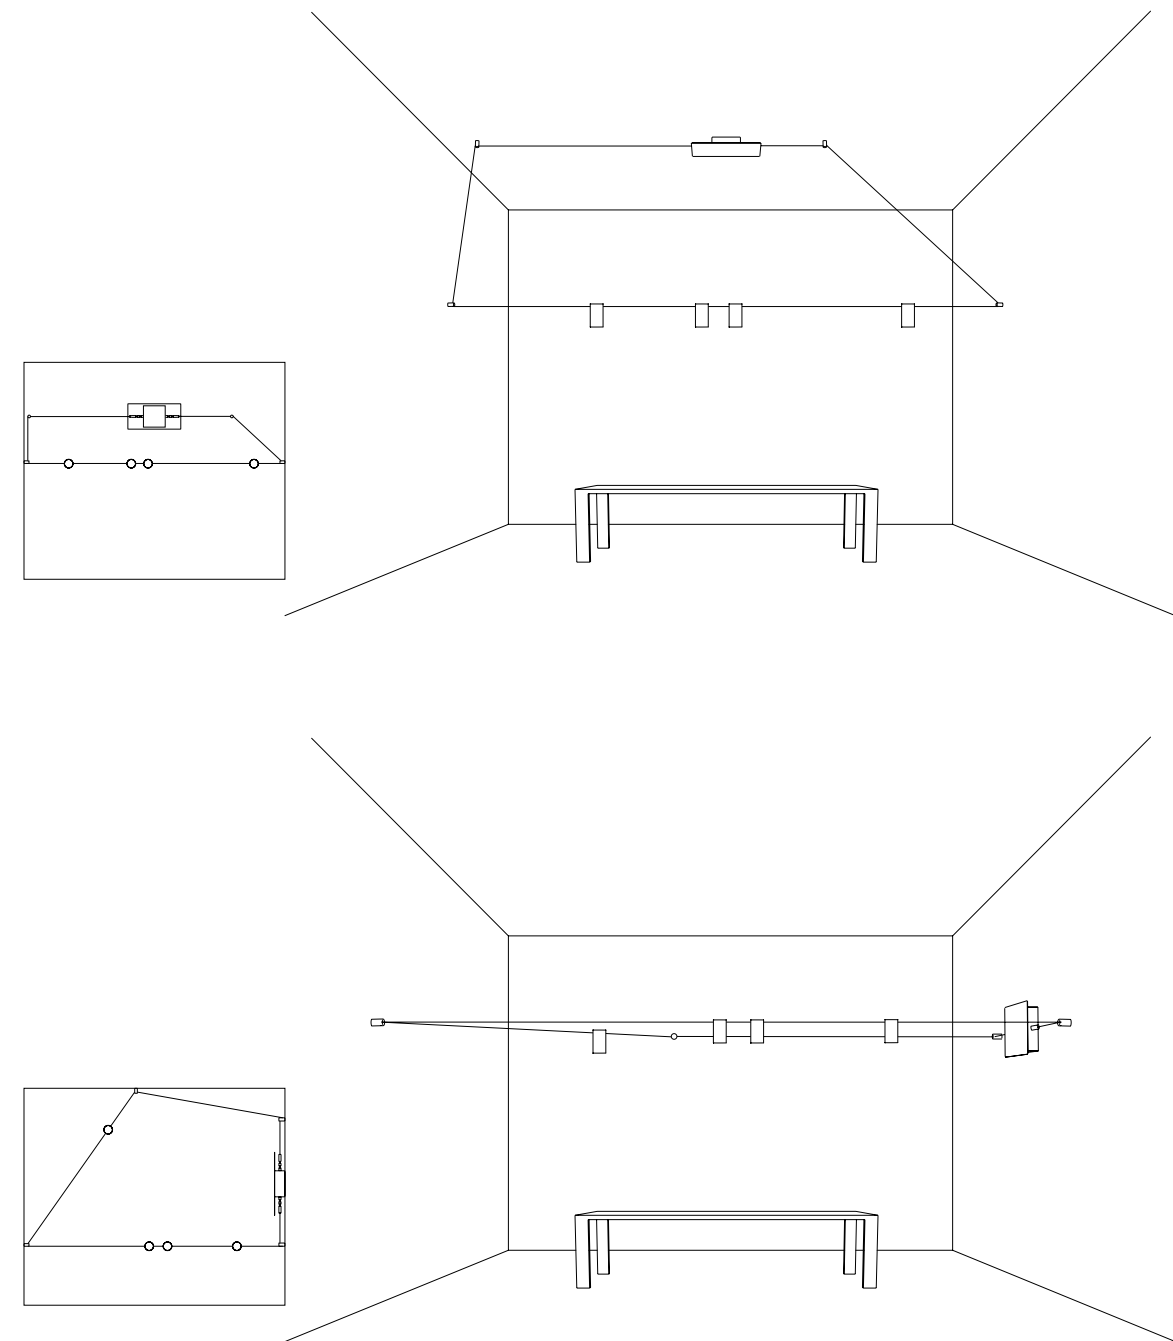

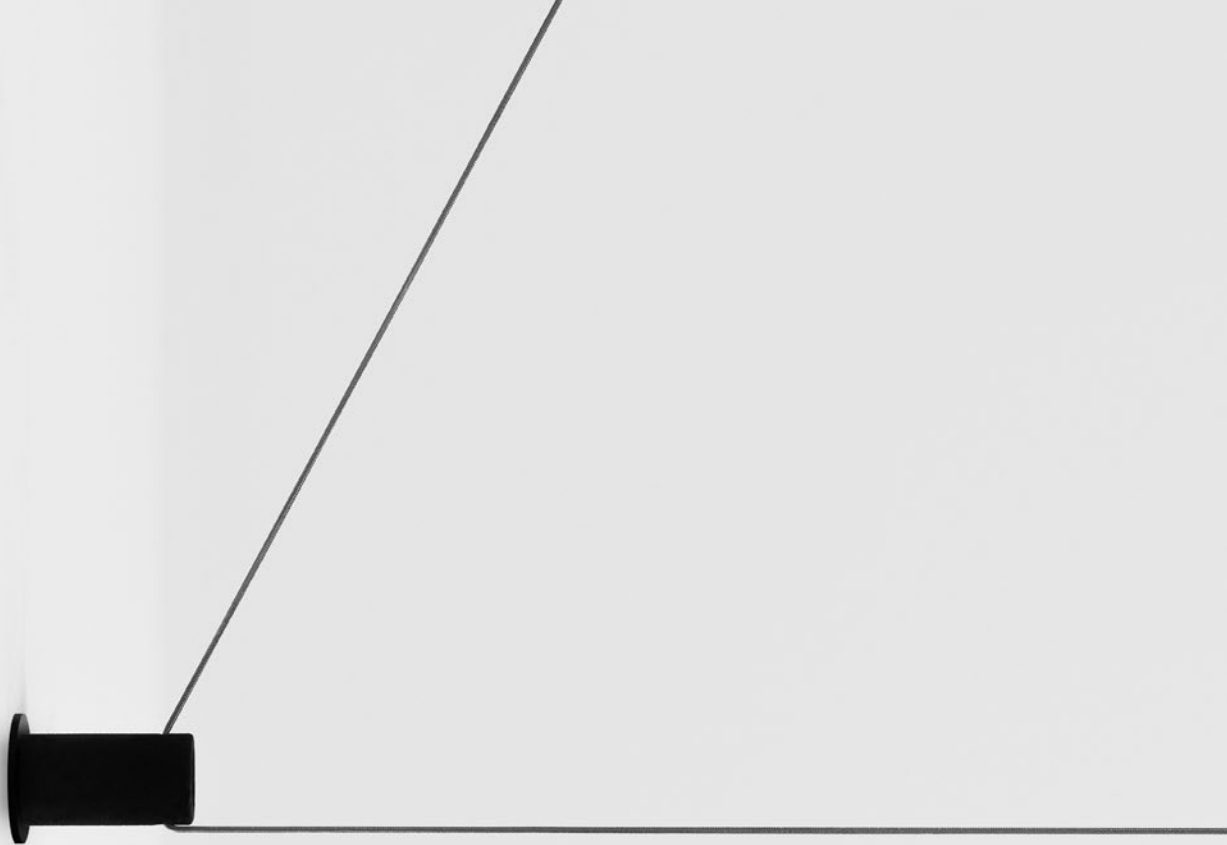

OPTIONAL ACCESSORIES

1A0040403	MATT BLACK - NARROW BEAM - 3000K	SPOT OHM - ADDITIONAL LED MODULE MAX 350 mA DC - 3,6 W LED - NARROW BEAM 3000K - 288 lm - CRI > 95 / 2700K - 272 lm - CRI > 95 DALI - PUSH - 1-10 V DIMMABLE - MAX 4 SPOT ON UNIPOLAR WIRE	• 60 / 2.36"  • 110 / 4.33" 
1A0040403-27	MATT BLACK - NARROW BEAM - 2700K		
1A0740403	MATT BLACK - MEDIUM BEAM - 3000K	SPOT OHM - ADDITIONAL LED MODULE MAX 350 mA DC - 3,6 W LED - MEDIUM BEAM 3000K - 286 lm - CRI > 95 / 2700K - 270 lm - CRI > 95 DALI - PUSH - 1-10 V DIMMABLE - MAX 4 SPOT ON UNIPOLAR WIRE	
1A0740403-27	MATT BLACK - MEDIUM BEAM - 2700K		

1A0420403	MATT BLACK	WIRE GUIDE	35 / 1.37"  30" / 1.18" 




Libertà assoluta, spazialità assoluta, creatività assoluta. / Absolute freedom, absolute spatiality, absolute creativity.

La possibilità di portare la luce ovunque, liberamente.
La tecnologia aiuta a cancellare i confini.
Materiali impalpabili, talvolta invisibili, conduttori nascosti, travestiti,
ragnatele sottili di filamenti che conducono e disegnano la luce.

The possibility to take light anywhere, freely.
Technology helps to break down the boundaries.
Intangible, almost invisible materials, hidden, camouflages conductors,
thin cobwebs of filaments that carry and draw the light.

Luce che corre su binari digitali, su fili leggeri e quasi invisibili,
su nastri modulabili che possono posarsi su scale,
finestre, vetrate, senza più limiti.
Circuiti che si chiudono, luci d'accento, diodi leggerissimi.
Tutto questo è **Sistemi**, una struttura che integra
quattro diversi progetti, modulabili e compatibili tra loro.

Light running on digital tracks, ultra-light and almost invisible wires,
modular tapes that can be laid limitlessly on
stairs, windows, glass panels.
Circuit that close, accent lighting, ultra-light diodes.
All this is **Sistemi**, a structure integrating four different,
modular and compatible designs.

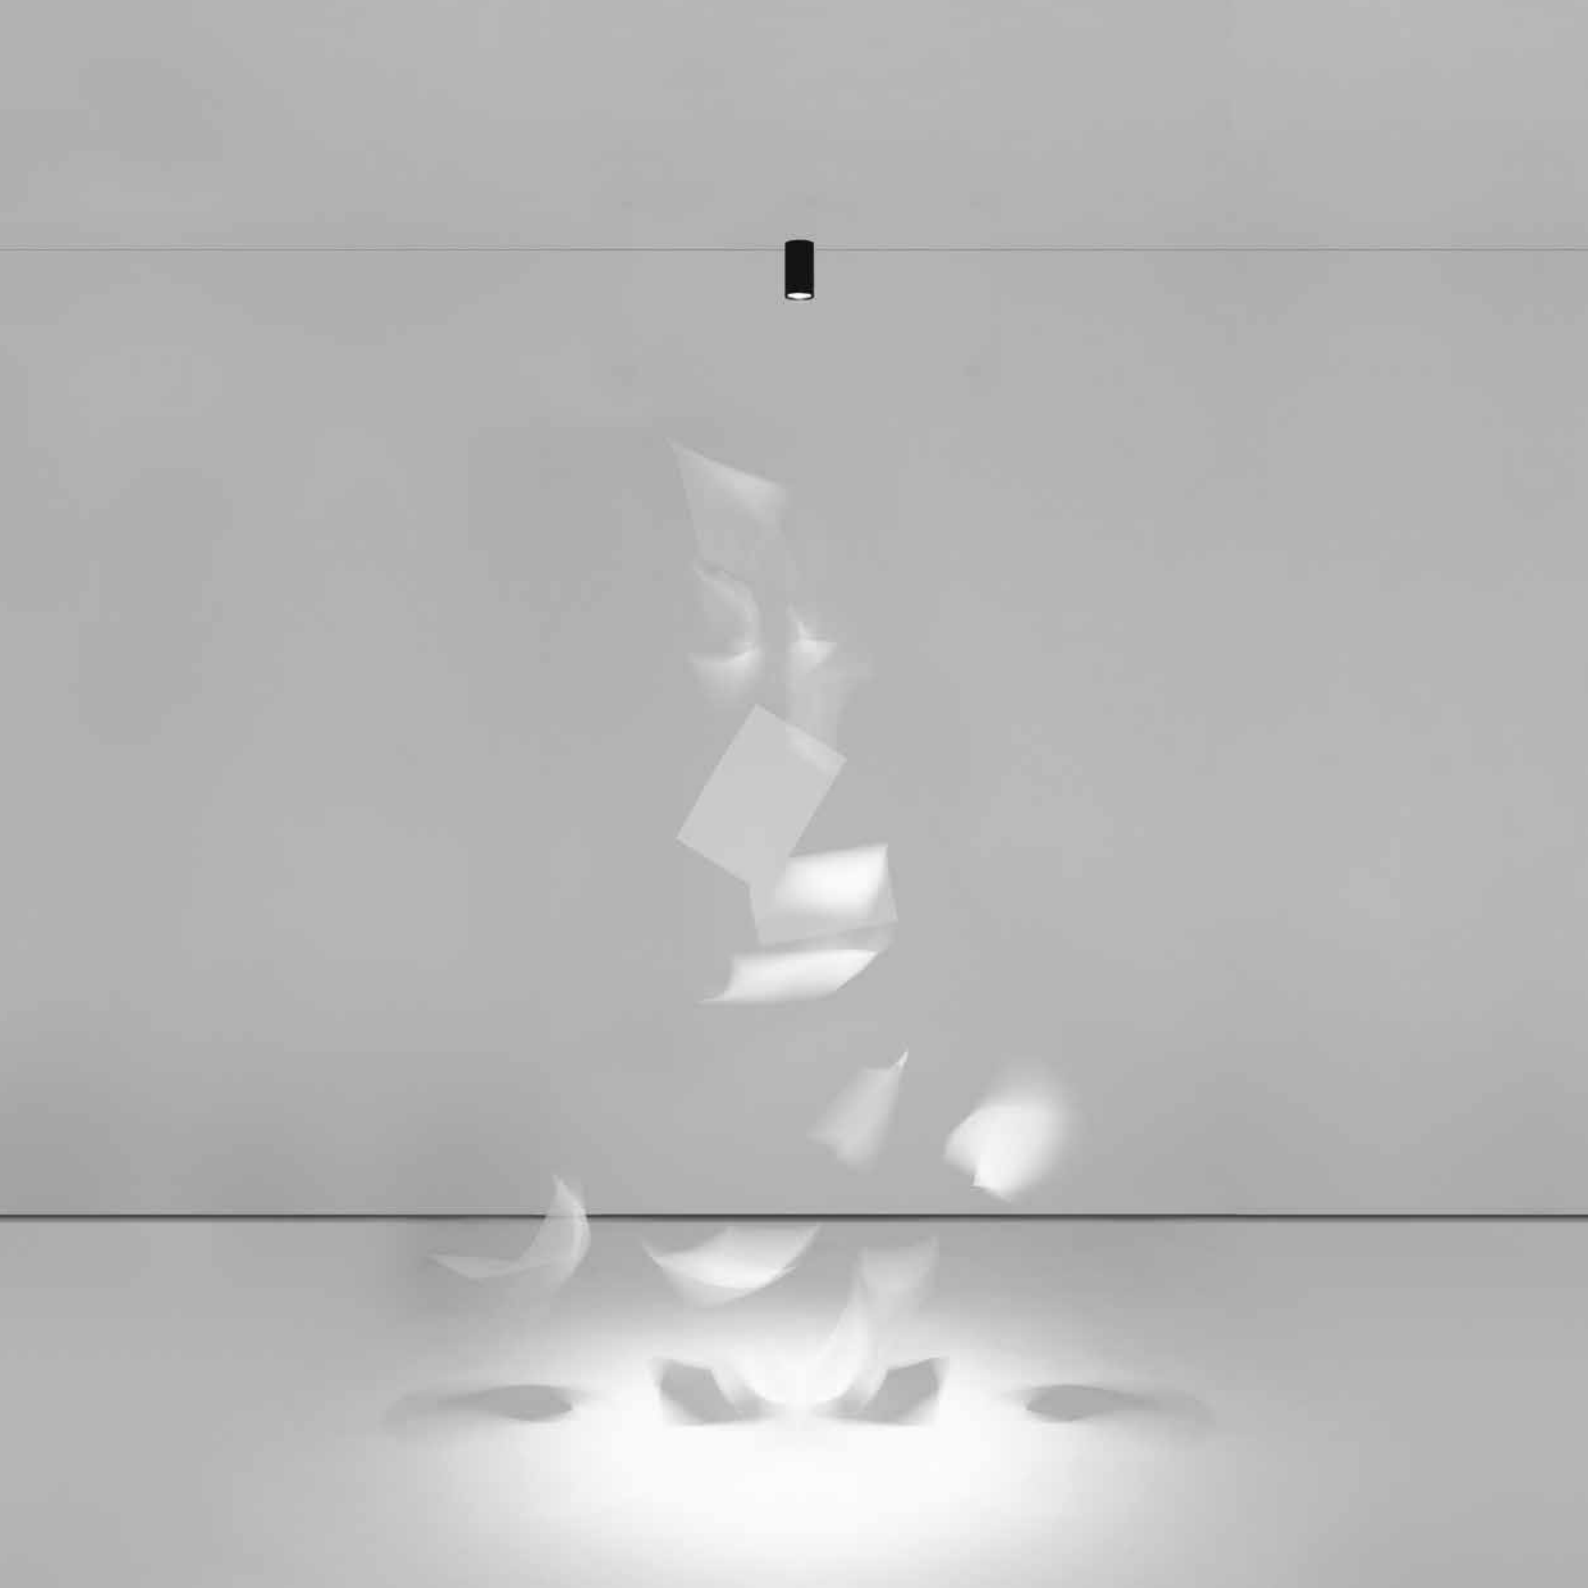



The sizes are expressed in millimeters.

DESIGN DAVIDE GROPPI - 2019
SISTEMA DA PARETE - METALLO - PA
WALL SYSTEM - METAL - PA







CE  IP 20


OHM ABSOLUTE

TIE ROD

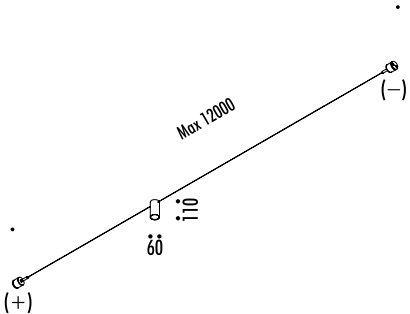

1A07604	STANDARD NARROW BEAM - 3000K	MAX 350 mA DC - 1 x 3,6 W LED - NARROW BEAM 3000K - 288 lm - CRI > 95 / 2700K - 272 lm - CRI > 95
1A07604-27	STANDARD NARROW BEAM - 2700K	CAVO UNIPOLARE 12 m - 2 TIRANTI BIANCHI - MAX 4 SPOT SUL CAVO UNIPOLARE KIT DI ALIMENTAZIONE OBBLIGATORIO INCLUSO DRIVER LED INCLUSO INPUT 110-240 V - 50/60 Hz - DIMMERABILE DALI - PUSH - 1-10 V ACCESSORI OPZIONALI NON INCLUSI
		UNIPOLAR WIRE 12 m - 2 WHITE TIE RODS - MAX 4 SPOT ON UNIPOLAR WIRE COMPULSORY POWER SUPPLY KIT INCLUDED
		INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - DALI - PUSH - 1-10 V DIMMABLE OPTIONAL ACCESSORIES NOT INCLUDED
1A04604	STANDARD MEDIUM BEAM - 3000K	MAX 350 mA DC - 1 x 3,6 W LED - MEDIUM BEAM 3000K - 286 lm - CRI > 95 / 2700K - 270 lm - CRI > 95
1A04604-27	STANDARD MEDIUM BEAM - 2700K	CAVO UNIPOLARE 12 m - 2 TIRANTI BIANCHI - MAX 4 SPOT SUL CAVO UNIPOLARE KIT DI ALIMENTAZIONE OBBLIGATORIO INCLUSO DRIVER LED INCLUSO INPUT 110-240 V - 50/60 Hz - DIMMERABILE DALI - PUSH - 1-10 V ACCESSORI OPZIONALI NON INCLUSI
		UNIPOLAR WIRE 12 m - 2 WHITE TIE RODS - MAX 4 SPOT ON UNIPOLAR WIRE COMPULSORY POWER SUPPLY KIT INCLUDED
		INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - DALI - PUSH - 1-10 V DIMMABLE OPTIONAL ACCESSORIES NOT INCLUDED

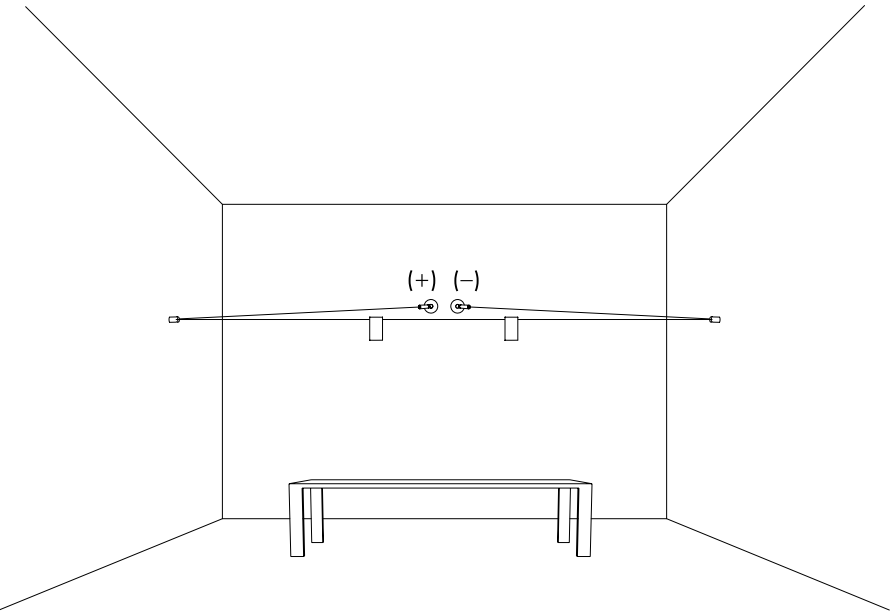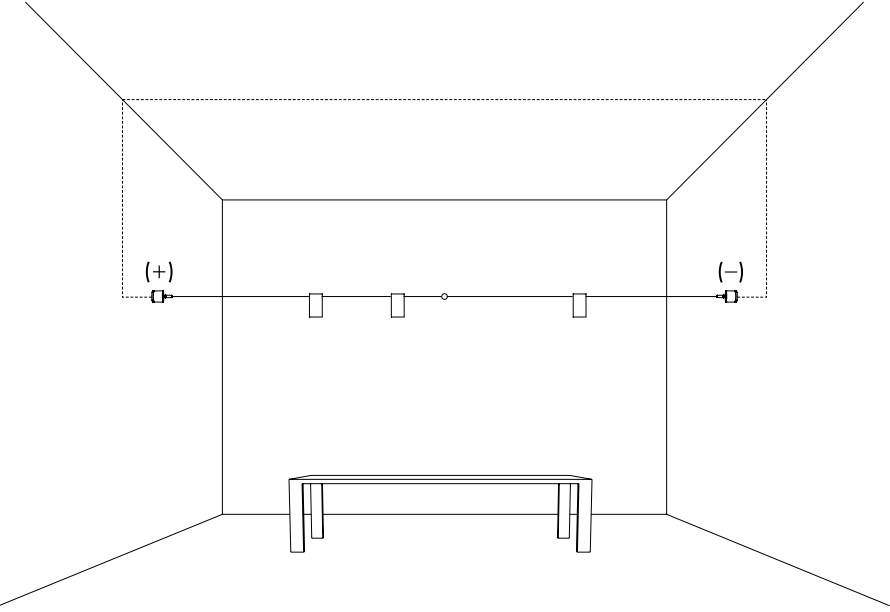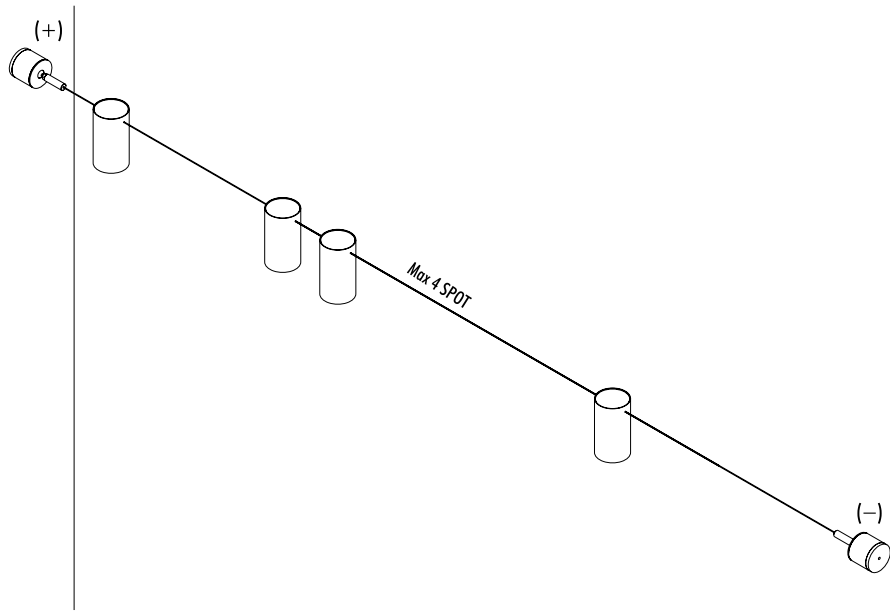

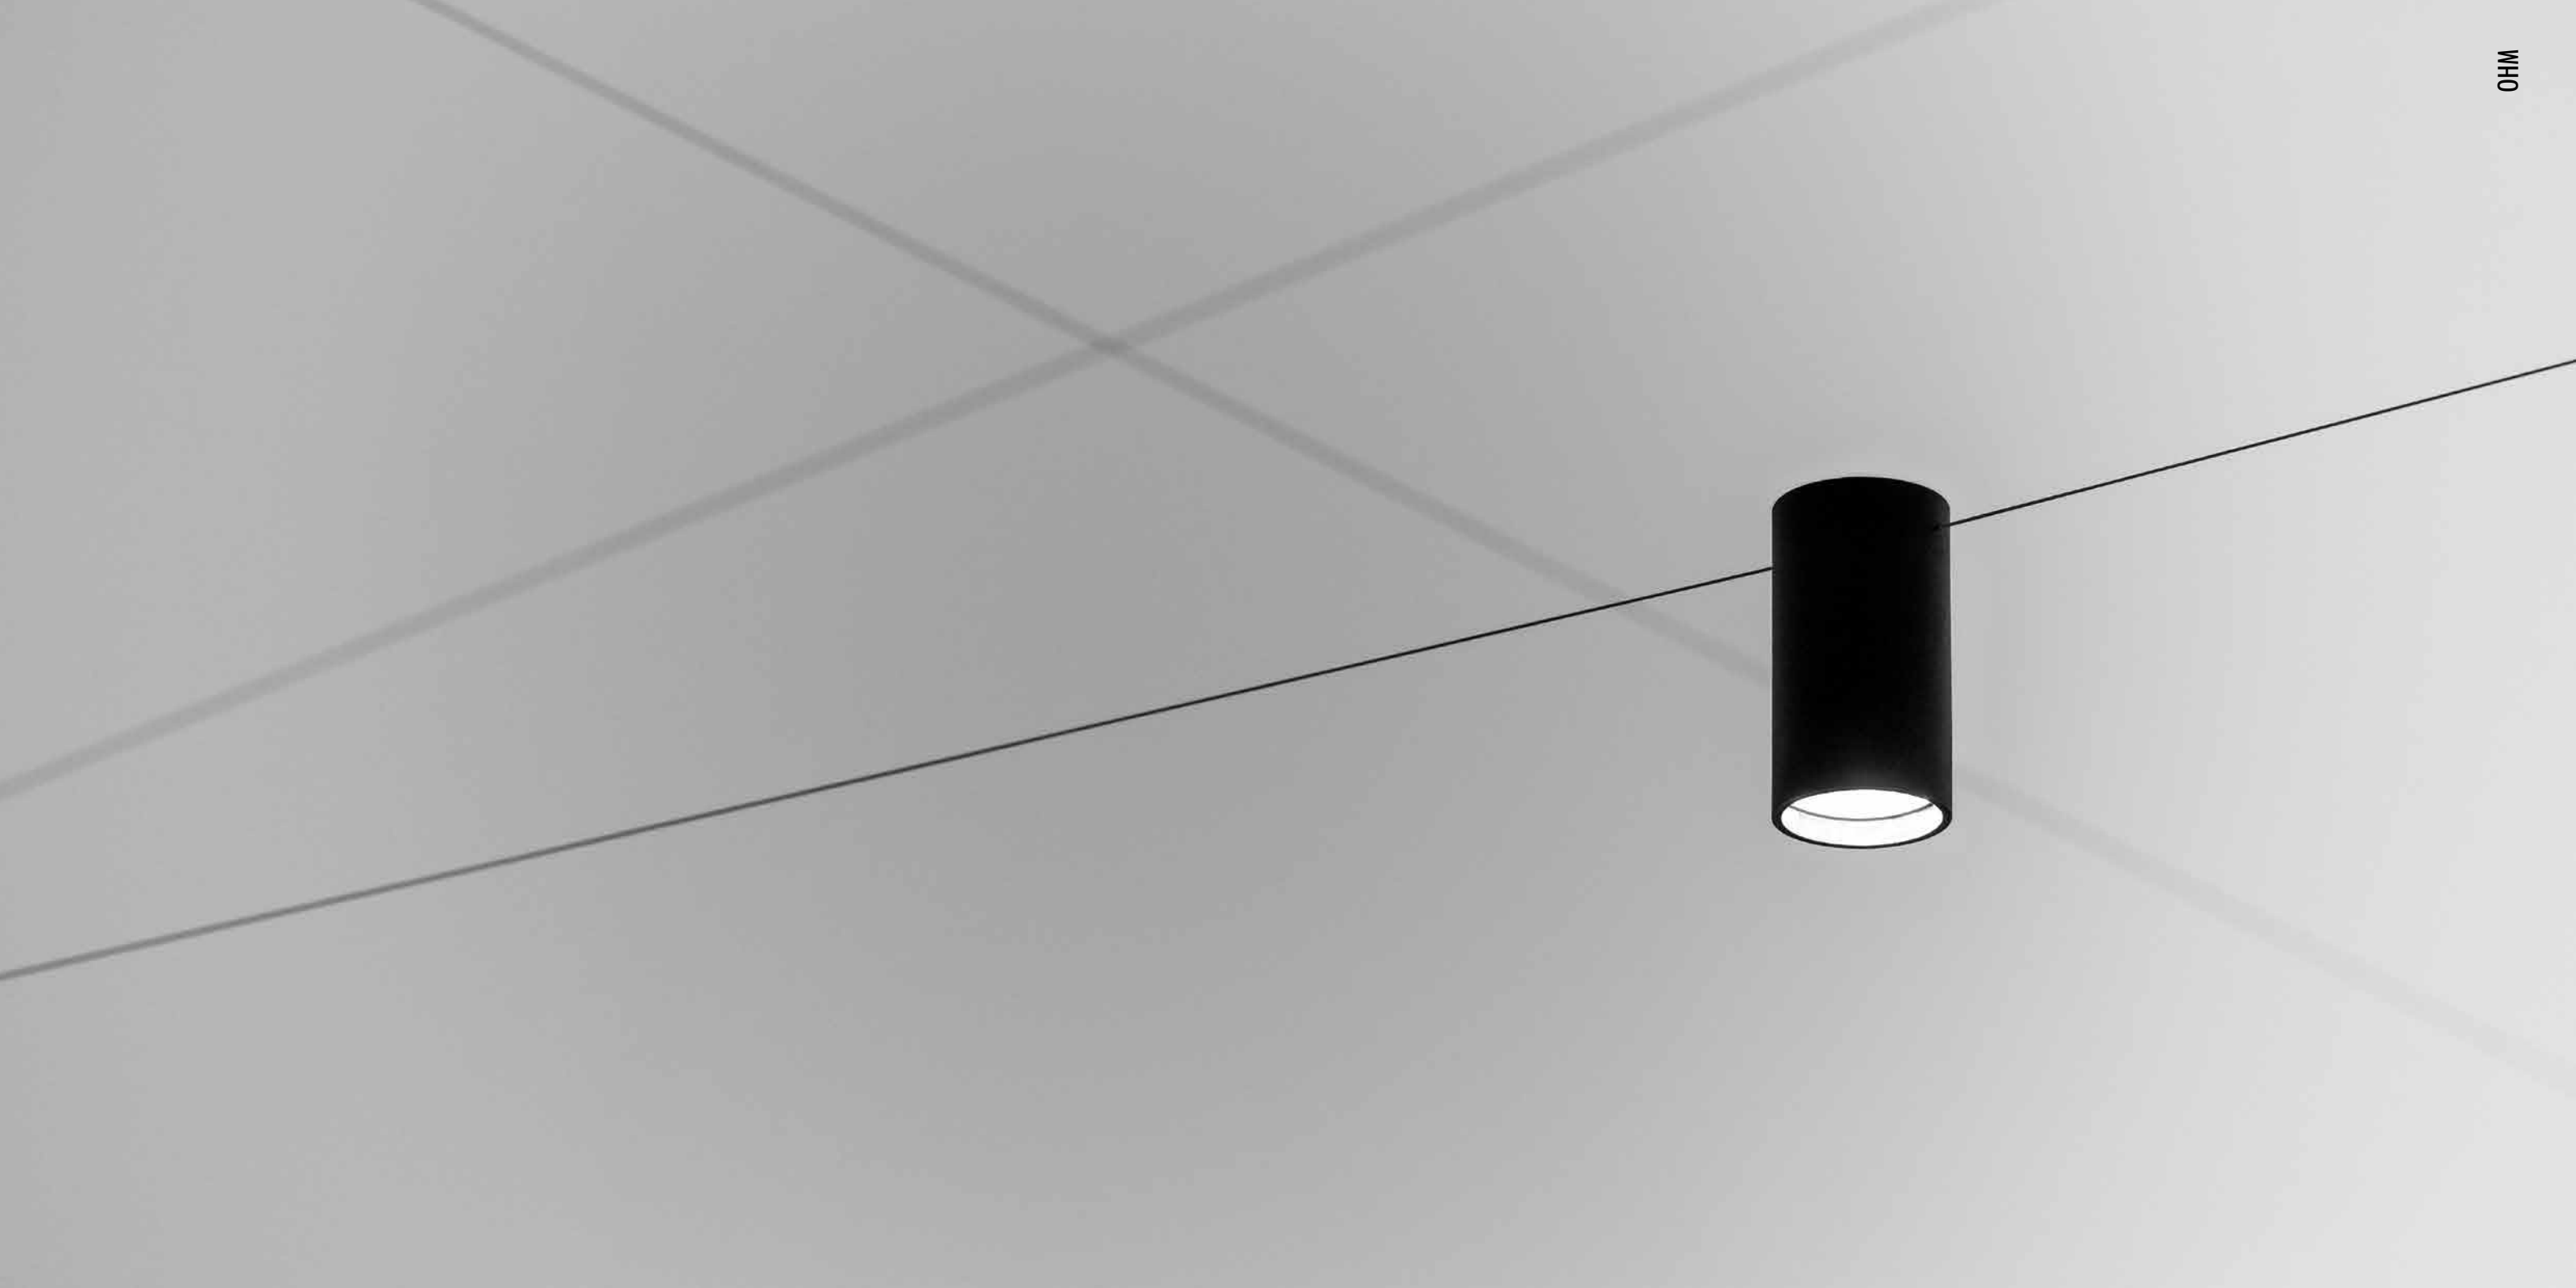





The sizes are expressed in millimeters.

DESIGN DAVIDE GROPPI - 2019
SISTEMA DA PARETE - METALLO - PA
WALL SYSTEM - METAL - PA


CE IP 20

OHM ROUNDTrip


WALL ROSE

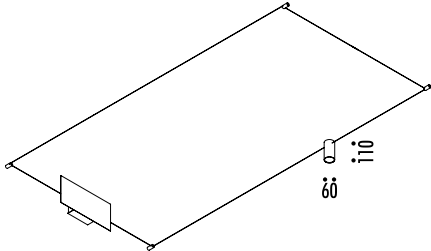


1A07504	STANDARD NARROW BEAM - 3000K	MAX 350 mA DC - 1 x 3,6 W LED - NARROW BEAM 3000K - 288 lm - CRI > 95 / 2700K - 272 lm - CRI > 95
1A07504-27	STANDARD NARROW BEAM - 2700K	CAVO UNIPOLARE 24 m - 4 GUIDACAVI NERI - MAX 4 SPOT SUL CAVO UNIPOLARE ROSONE A PARETE BIANCO DRIVER LED INCLUSO INPUT 110-240 V - 50/60 Hz - DIMMERABILE DALI - PUSH - 1-10 V ACCESSORI OPZIONALI NON INCLUSI
		UNIPOLAR WIRE 24 m - 4 BLACK WIRES GUIDE - MAX 4 SPOT ON UNIPOLAR WIRE WHITE WALL ROSE
		INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - DALI - PUSH - 1-10 V DIMMABLE OPTIONAL ACCESSORIES NOT INCLUDED
197804	STANDARD MEDIUM BEAM - 3000K	MAX 350 mA DC - 1 x 3,6 W LED - MEDIUM BEAM 3000K - 286 lm - CRI > 95 / 2700K - 270 lm - CRI > 95
197804-27	STANDARD MEDIUM BEAM - 2700K	CAVO UNIPOLARE 24 m - 4 GUIDACAVI NERI - MAX 4 SPOT SUL CAVO UNIPOLARE ROSONE A PARETE BIANCO DRIVER LED INCLUSO INPUT 110-240 V - 50/60 Hz - DIMMERABILE DALI - PUSH - 1-10 V ACCESSORI OPZIONALI NON INCLUSI
		UNIPOLAR WIRE 24 m - 4 BLACK WIRES GUIDE - MAX 4 SPOT ON UNIPOLAR WIRE WHITE WALL ROSE
		INCLUDES LED DRIVER INPUT 110-240 V - 50/60 Hz - DALI - PUSH - 1-10 V DIMMABLE OPTIONAL ACCESSORIES NOT INCLUDED

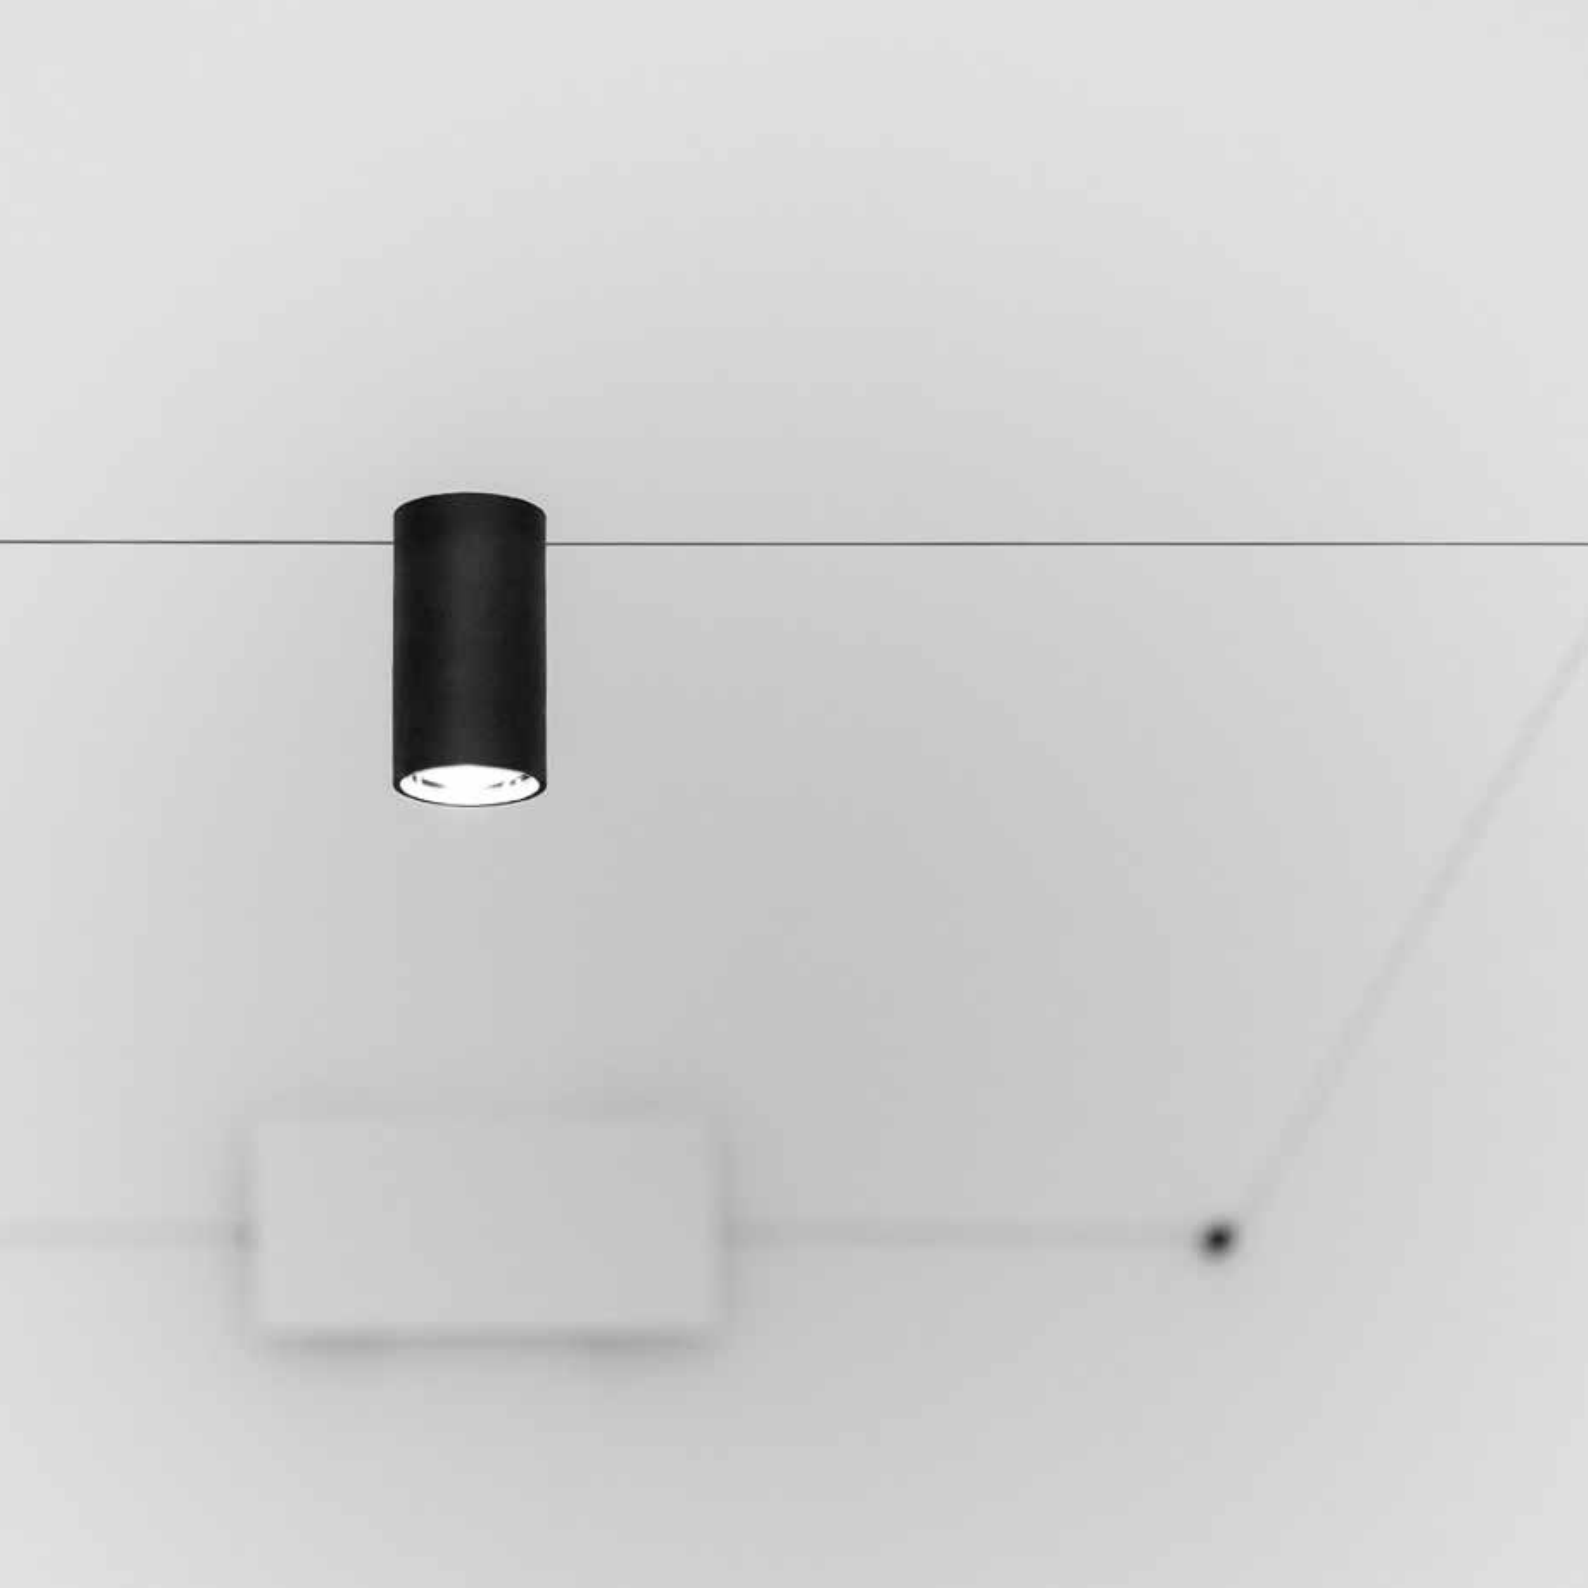

POSSIBILI LAYOUT / LAYOUT EXAMPLES

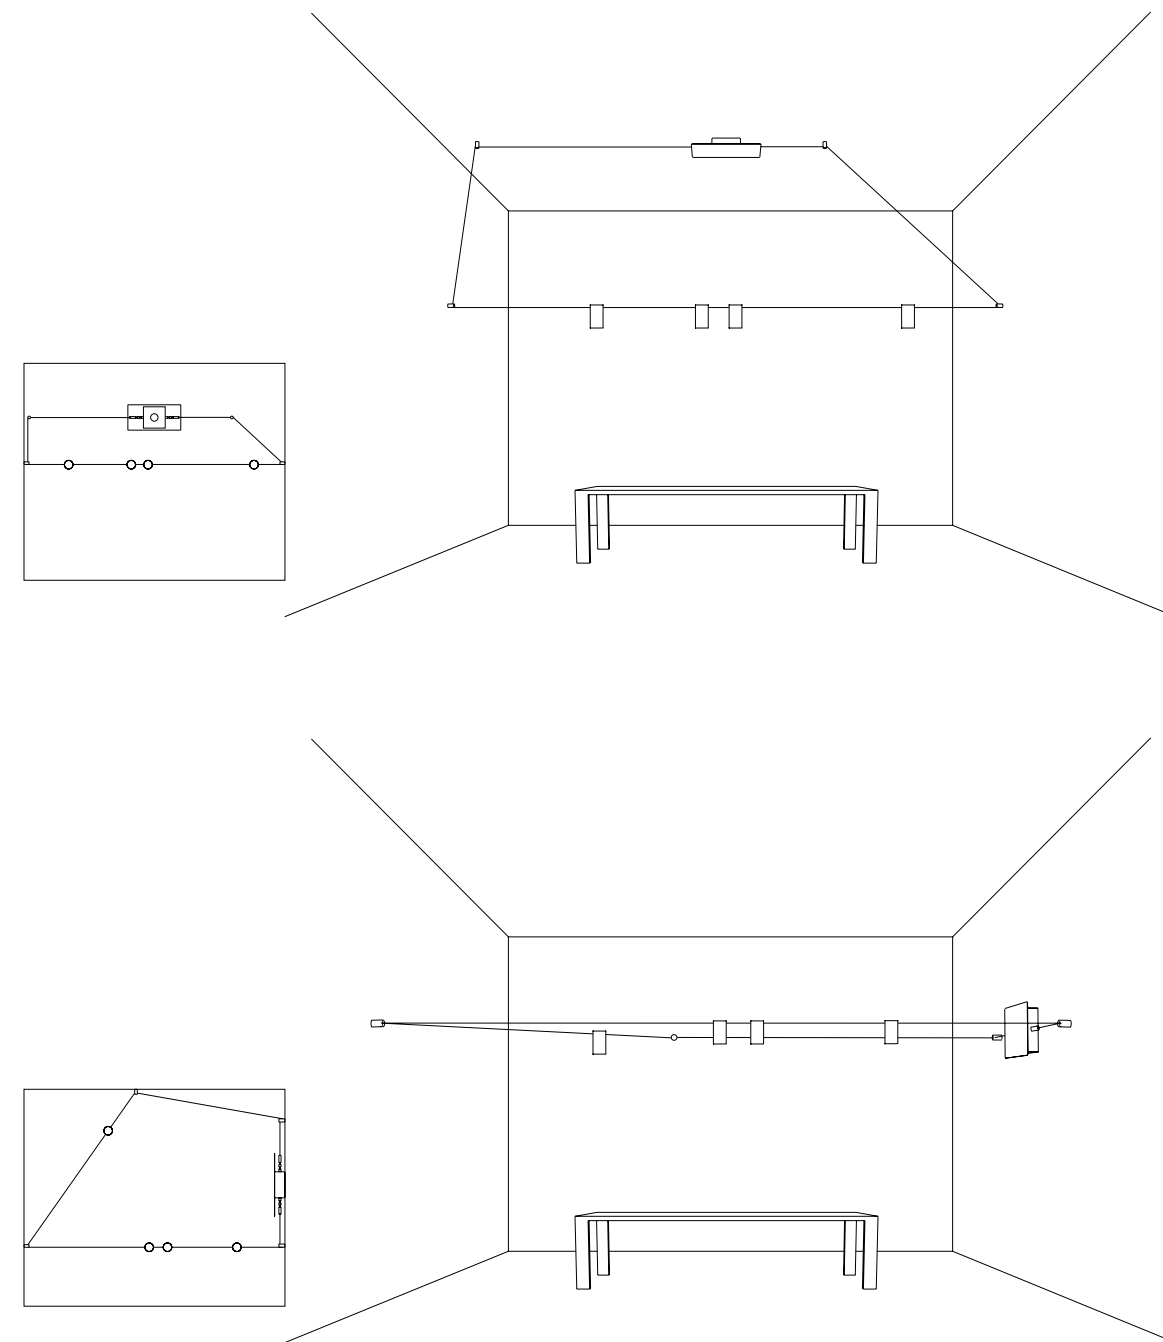

OHM ROUNDTrip

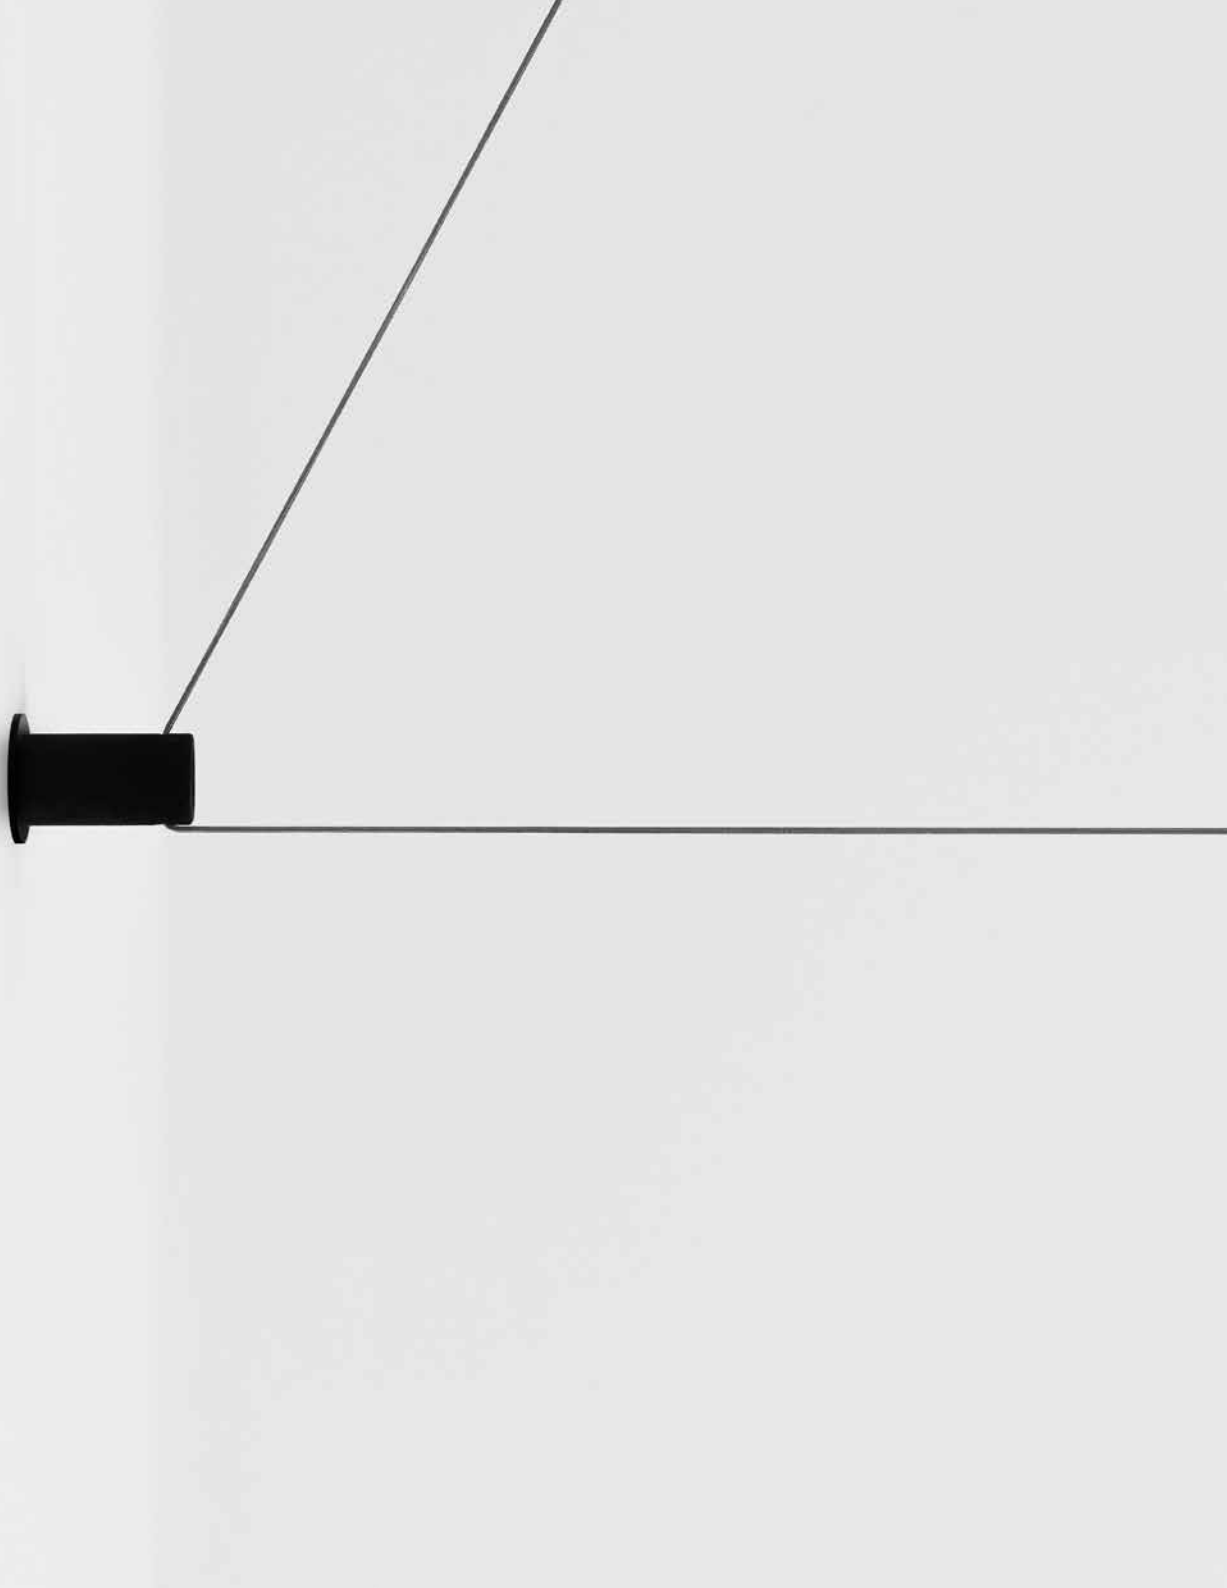

The sizes are expressed in millimeters.

CE IP 20

OHM

ACCESSORI OPZIONALI / OPTIONAL ACCESSORIES

1A00404	NERO OPACO / MATT BLACK - NARROW BEAM - 3000K	SPOT OHM - MODULO LED SUPPLEMENTARE / ADDITIONAL LED MODULE MAX 350 mA DC - 3,6 W LED - NARROW BEAM 3000K - 288 lm - CRI>95 / 2700K - 272 lm - CRI>95 DIMMERABILE DALI - PUSH - 1-10 V - MAX 4 SPOT SUL CAVO UNIPOLARE DALI - PUSH - 1-10 V DIMMABLE - MAX 4 SPOT ON UNIPOLAR WIRE	• 60 • • • 110 •
1A00404-27	NERO OPACO / MATT BLACK - NARROW BEAM - 2700K		
1A07404	NERO OPACO / MATT BLACK - MEDIUM BEAM - 3000K	SPOT OHM - MODULO LED SUPPLEMENTARE / ADDITIONAL LED MODULE MAX 350 mA DC - 3,6 W LED - MEDIUM BEAM 3000K - 286 lm - CRI>95 / 2700K - 270 lm - CRI>95 DIMMERABILE DALI - PUSH - 1-10 V - MAX 4 SPOT SUL CAVO UNIPOLARE DALI - PUSH - 1-10 V DIMMABLE - MAX 4 SPOT ON UNIPOLAR WIRE	• 60 • • • 110 •
1A07404-27	NERO OPACO / MATT BLACK - MEDIUM BEAM - 2700K		
1A14503	BIANCO OPACO / MATT WHITE	PIASTRA PARETE / WALL BACK PLATE	• 120 • • • 120 •
1A04204	NERO OPACO / MATT BLACK	GUIDACAVO / WIRE GUIDE	• 30 • • • 35 •