




The sizes are expressed in millimeters.


DESIGN 2004
LAMPADA DA SOFFITTO - METALLO
CEILING LAMP - METAL

CE IP 20

PUNTO PL



1A11103	BIANCO OPACO / MATT WHITE	100-240 V - 50/60 Hz - MAX 18 W LED
1A11134	BIANCO - NERO OPACO BICOLORE / MATT WHITE - BLACK BICOLOUR	ORIENTABILE - DIMMERABILE PUSH - 1-10 V
		MODULO LED NON INCLUSO
		ACCESSORI OPZIONALI MODULO LED NOT INCLUDED
		ADJUSTABLE - PUSH - 1-10 V DIMMABLE
		LED MODULE NOT INCLUDED
		OPTIONAL LED MODULE ACCESSORIES NOT INCLUDED

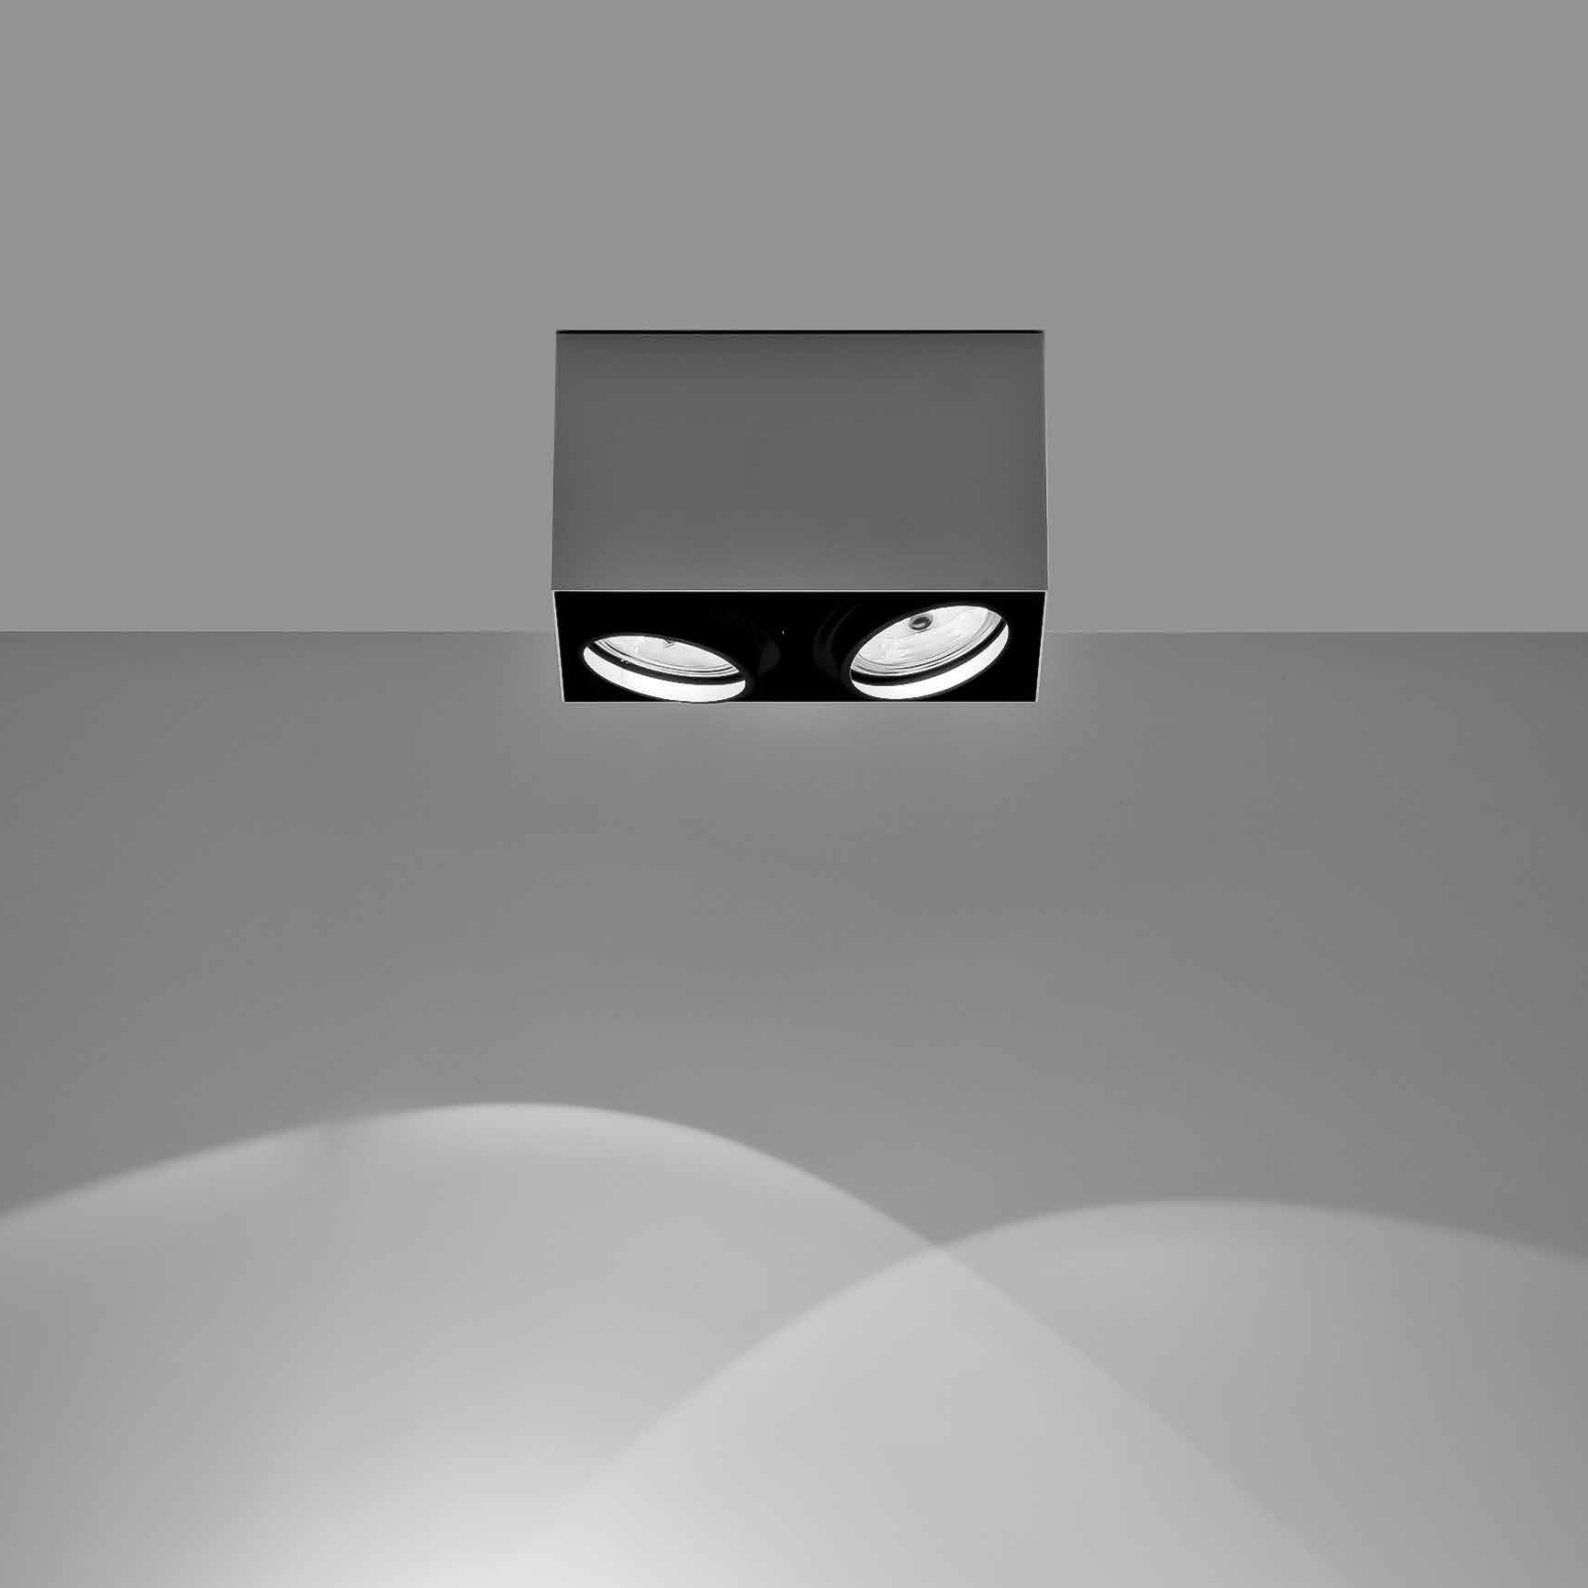


The sizes are expressed in millimeters.


DESIGN 2004
LAMPADA DA SOFFITTO - METALLO
CEILING LAMP - METAL

CE IP 20

PUNTO 2 PL



1A11203	BIANCO OPACO / MATT WHITE	100-240 V - 50/60 Hz - MAX 2 x 18 W LED ORIENTABILE - DIMMERABILE PUSH - 1-10 V MODULI LED NON INCLUSI
1A11234	BIANCO - NERO OPACO BICOLORE / MATT WHITE - BLACK BICOLOUR	ACCESSORI OPZIONALI MODULO LED NON INCLUSI
		ADJUSTABLE - PUSH - 1-10 V DIMMABLE
		LED MODULES NOT INCLUDED
		OPTIONAL LED MODULE ACCESSORIES NOT INCLUDED

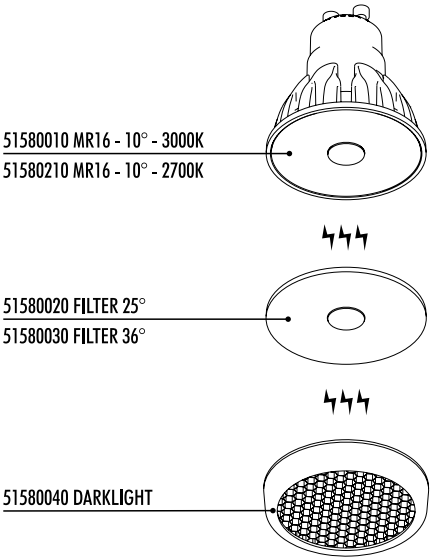

	CODE	SOCKET	TENSION	WATTAGE	BEAM ANGLE (°)	TEMPERATURE (K)	SOURCE LUMENS	BULB EFFICIENCY	CRI (Ra)	DIMMABLE	PRODUCT REFERENCE
🔔	LAMPADINE LED SORAA MR16 - DIMMERABILE IGBT / SORAA LED BULBS MR16 - IGBT DIMMABLE										
	51580010	GU10	230 V	7,5 W	10°	3000K	410 lm	A	95	X	DOT P DOT PL DOT R DOT SISTEMA MINI 51 MINI BIT 51 MINI PL TRICK TRACK
	51580210	GU10	230 V	7,5 W	10°	2700K	390 lm	A	95	X	

ACCESSORI "POINT SOURCE OPTICS" PER GENERARE FASCI UNIFORMI E DI ALTA INTENSITA' / "POINT SOURCE OPTICS" ACCESSORIES FOR UNIFORM AND HIGH INTENSITY BEAMS

51580020	FILTER - MR16	25°	DOT FRAMELESS DOT P DOT PL DOT R DOT SISTEMA
51580030	FILTER - MR16	36°	MINI MINI 51 MINI BIT MINI BIT 51 MINI PL TRICK TRACK
51580040	DARKLIGHT - MR16	-	

MODULI LED / LED MODULES

50041500	500 mA DC	18 W	15°	3000K	1829 lm	A+	90	X	PUNTO PUNTO PL PUNTO 2 PL SPOT SPOT SISTEMA
50041510	500 mA DC	18 W	15°	2700K	1719 lm	A+	90	X	
50041350	500 mA DC	18 W	24°	3000K	1869 lm	A+	90	X	
50041450	500 mA DC	18 W	24°	2700K	1759 lm	A+	90	X	
50041500	350 mA DC	12,6 W	15°	3000K	1350 lm	A+	90	X	SPOT ENDLESS SPOT ENDLESS IOT
50041510	350 mA DC	12,6 W	15°	2700K	1269 lm	A+	90	X	
50041350	350 mA DC	12,6 W	24°	3000K	1361 lm	A+	90	X	
50041450	350 mA DC	12,6 W	24°	2700K	1281 lm	A+	90	X	

ACCESSORI OPZIONALI MODULO LED / OPTIONAL LED MODULE ACCESSORIES


1A12100	STANDARD	DARKLIGHT	PUNTO PUNTO PL PUNTO 2 PL SPOT SPOT ENDLESS SPOT ENDLESS IOT SPOT SISTEMA
---------	----------	-----------	---



The sizes are expressed in millimeters / inches.

DESIGN 2004
CEILING LAMP - METAL

PUNTO PL



1A1110303	MATT WHITE	120 V - 60 Hz - MAX 15 W LED ADJUSTABLE - PUSH - 1-10 V DIMMABLE COMPULSORY LED MODULE NOT INCLUDED OPTIONAL LED MODULE ACCESSORIES NOT INCLUDED
1A1113403	MATT WHITE - BLACK BICOLOUR	

COMPULSORY ACCESSORIES

50041500	LED MODULE 15° SPOT	MAX 15 W LED - 15° - 3000K - 1456 lm - CRI 90 - DIMMABLE
50041510	LED MODULE 15° SPOT	MAX 15 W LED - 15° - 2700K - 1350 lm - CRI 90 - DIMMABLE
50041350	LED MODULE 24° SPOT	MAX 15 W LED - 24° - 3000K - 1584 lm - CRI 90 - DIMMABLE
50041450	LED MODULE 24° SPOT	MAX 15 W LED - 24° - 2700K - 1480 lm - CRI 90 - DIMMABLE

OPTIONAL ACCESSORIES

1A1210003	STANDARD	DARKLIGHT
-----------	----------	-----------