


ROMANO 1200 0765

SKU 1150004

astro

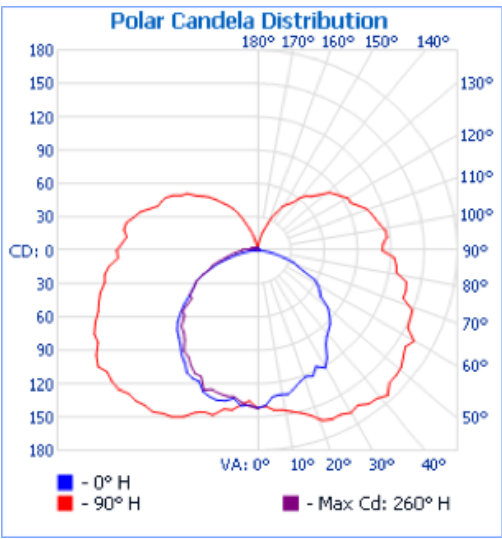

PRODUCT SPECIFICATION

GENERAL

FINISH:	Polished Chrome	CABLE LENGTH:	Not applicable
MAIN MATERIAL:	Metal - Aluminium	GROSS WEIGHT:	1.97 (kg)
DIMENSIONS:	H:1200mm W:40mm D:60mm	CLASS:	CE (Class II)
INSTALLATION ORIENTATION:	Wall Mount	IP RATING:	IP44
CUT OUT HOLE:	Not Applicable	BATHROOM ZONE:	Zone 2, 3
RECESS DEPTH:	Not Applicable	VOLTAGE:	Mains 230 (V)
FIRE RATING:	Not Applicable	PRODUCT F MARK:	Suitable for mounting on flammable materials

LAMP

LIGHT SOURCE:	T5	MACADAM ELIPSE:	Not Applicable
MAXIMUM WATTAGE:	28W	UGR:	-16.5 (UGR)
MAXIMUM LAMP LENGTH:	Not Applicable	BEAM ANGLE:	Not Applicable
LAMP INCLUDED?	No	TILT ADJUSTMENT ANGLE:	Not Applicable
LUMINOUS FLUX:	1022.1 (lm)	ROTATION ADJUSTMENT ANGLE:	Not Applicable
COLOUR TEMP:	Lamp Dependent	AVERAGE LIFESPAN:	12,000 (hrs)
CRI:	Lamp Dependent	L70:	Not Applicable
R9:	-16.5		


ELECTRICAL

SWITCHED:	No	SUPPLY FREQUENCY:	50/60 (Hz)
DIMMABLE:	No	DRIVER/BALLAST VOLTAGE:	220-240 (V)
DIMMING METHOD:	Not Applicable	DRIVER AVERAGE LIFESPAN:	Not Applicable
DRIVER OUTPUT CURRENT:	Not Applicable	EFFICACY:	35.75 (lm/W)
DRIVER OUTPUT VOLTAGE:	Not Applicable	DRIVER INCLUDED?	Yes (Integral)

ADDITIONAL INFORMATION





This product is not suitable for use with a PIR motion detector.



BOX QUANTITY X6

PRODUCT ELEVATIONS

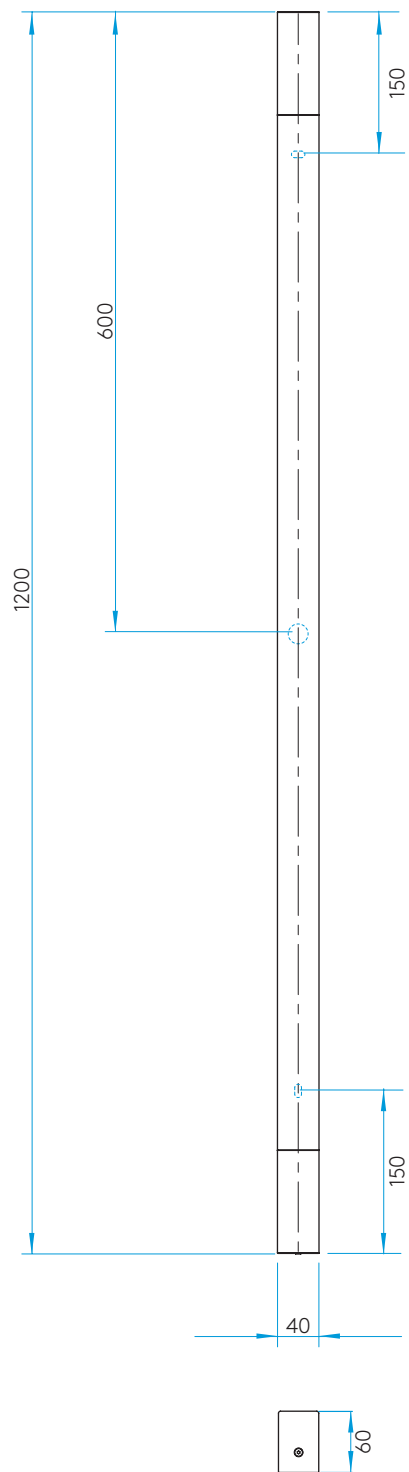

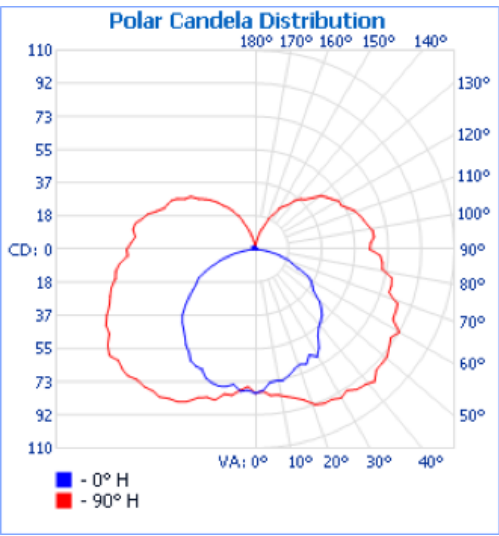

PRODUCT SPECIFICATION

GENERAL

FINISH:	Polished Chrome	CABLE LENGTH:	Not applicable
MAIN MATERIAL:	Metal - Aluminium	GROSS WEIGHT:	1.36 (kg)
DIMENSIONS:	H: 600mm W: 40mm D: 60mm	CLASS:	CE (Class II)
INSTALLATION ORIENTATION:	Wall Mount	IP RATING:	IP44
CUT OUT HOLE:	Not Applicable	BATHROOM ZONE:	Zone 2, 3
RECESS DEPTH:	Not Applicable	VOLTAGE:	Mains 230 (V)
FIRE RATING:	Not Applicable	PRODUCT F MARK:	Suitable for mounting on flammable materials

LAMP

LIGHT SOURCE:	T5	MACADAM ELIPSE:	Not Applicable
MAXIMUM WATTAGE:	14W	UGR:	6.9 (UGR)
MAXIMUM LAMP LENGTH:	Not Applicable	BEAM ANGLE:	Not Applicable
LAMP INCLUDED?	No	TILT ADJUSTMENT ANGLE:	Not Applicable
LUMINOUS FLUX:	582.9 (lm)	ROTATION ADJUSTMENT ANGLE:	Not Applicable
COLOUR TEMP:	Lamp Dependent	AVERAGE LIFESPAN:	12,000 (hrs)
CRI:	Lamp Dependent	L70:	Not Applicable
R9:	6.9		


ELECTRICAL

SWITCHED:	No	SUPPLY FREQUENCY:	50/60 (Hz)
DIMMABLE:	No	DRIVER/BALLAST VOLTAGE:	220-240 (V)
DIMMING METHOD:	Not Applicable	DRIVER AVERAGE LIFESPAN:	Not Applicable
DRIVER OUTPUT CURRENT:	Not Applicable	EFFICACY:	31.22 (lm/W)
DRIVER OUTPUT VOLTAGE:	Not Applicable	DRIVER INCLUDED?	Yes (Integral)

ADDITIONAL INFORMATION



This product is not suitable for use with a PIR motion detector.



BOX QUANTITY X8

PRODUCT ELEVATIONS

