


# ECLIPSE ROUND 250 7249

SKU 1333002

astro

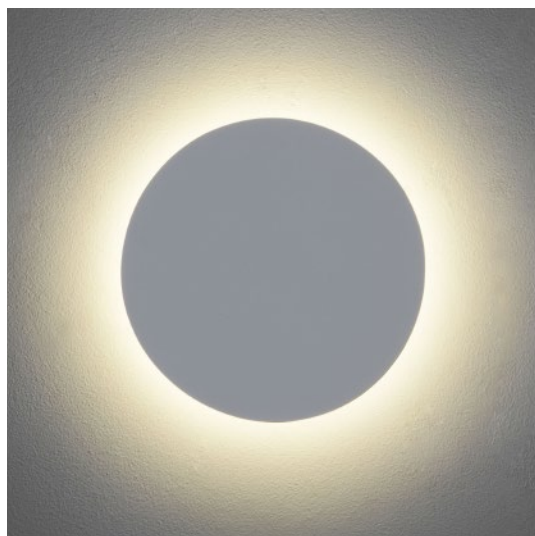

## PRODUCT SPECIFICATION

### GENERAL

<b>FINISH:</b>	Plaster	<b>CABLE LENGTH:</b>	Not Applicable
<b>MAIN MATERIAL:</b>	Plaster	<b>GROSS WEIGHT:</b>	2.0 (kg)
<b>DIMENSIONS:</b>	D: 38mm Ø: 250mm	<b>CLASS:</b>	CE (Class I)
<b>INSTALLATION ORIENTATION:</b>	Wall Mount - Vertical	<b>IP RATING:</b>	IP20
<b>CUT OUT HOLE:</b>	Not Applicable	<b>BATHROOM ZONE:</b>	Zone 3
<b>RECESS DEPTH:</b>	Not Applicable	<b>VOLTAGE:</b>	Mains 230V
<b>FIRE RATING:</b>	Not Applicable	<b>PRODUCT F MARK:</b>	Suitable for mounting on flammable materials


### LAMP

<b>LIGHT SOURCE:</b>	per m LED strip	<b>MACADAM ELIPSE:</b>	Not Applicable
<b>MAXIMUM WATTAGE:</b>	8W	<b>UGR:</b>	To Be Advised
<b>MAXIMUM LAMP LENGTH:</b>	Not Applicable	<b>BEAM ANGLE:</b>	Not Applicable
<b>LAMP INCLUDED?</b>	Yes (Integral)	<b>TILT ADJUSTMENT ANGLE:</b>	Not Applicable
<b>LUMINOUS FLUX:</b>	452.4 (lm)	<b>ROTATION ADJUSTMENT ANGLE:</b>	Not Applicable
<b>COLOUR TEMP:</b>	3000 (K)	<b>AVERAGE LIFESPAN:</b>	Not Applicable
<b>CRI:</b>	60	<b>L70:</b>	To Be Advised
<b>R9:</b>	To Be Advised		


### ELECTRICAL

<b>SWITCHED:</b>	No	<b>SUPPLY FREQUENCY:</b>	50/60 (Hz)
<b>DIMMABLE:</b>	No	<b>DRIVER/BALLAST VOLTAGE:</b>	220-240 (V)
<b>DIMMING METHOD:</b>	Not Applicable	<b>DRIVER AVERAGE LIFESPAN:</b>	30,000 (Hrs)
<b>DRIVER OUTPUT CURRENT:</b>	Not Applicable	<b>EFFICACY:</b>	43.3 (lm/W)
<b>DRIVER OUTPUT VOLTAGE:</b>	12 (V)	<b>DRIVER/BALLAST INCLUDED?</b>	Yes (Integral)

## ADDITIONAL INFORMATION




THIS PRODUCT CAN BE SPRAY PAINTED



BOX QUANTITY X6




PRODUCT ELEVATIONS

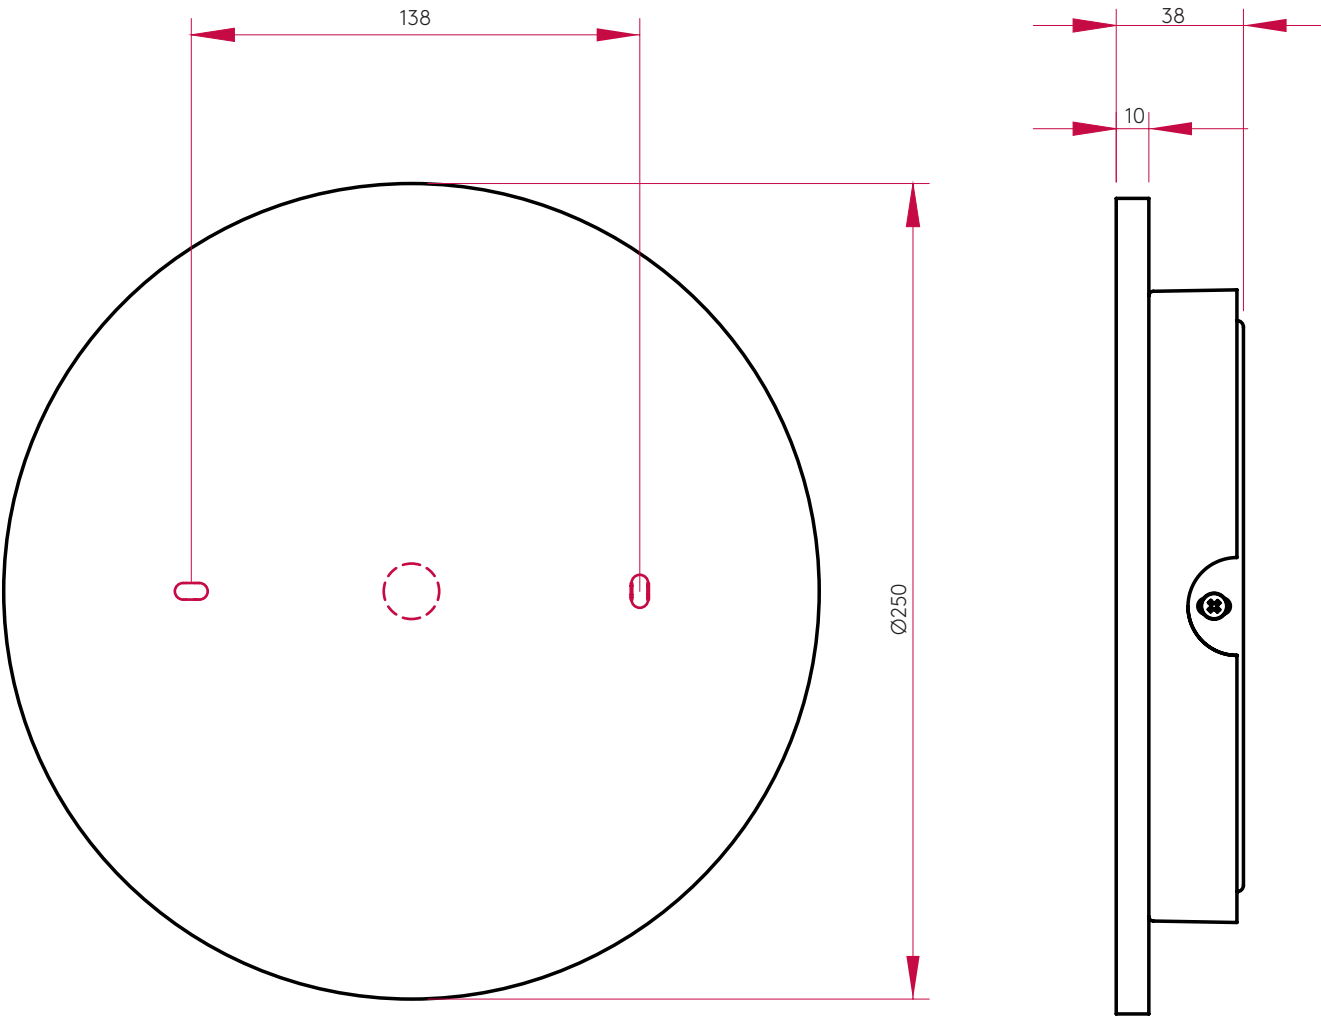

ECLIPSE 350 7454  
SKU 1333003

astro

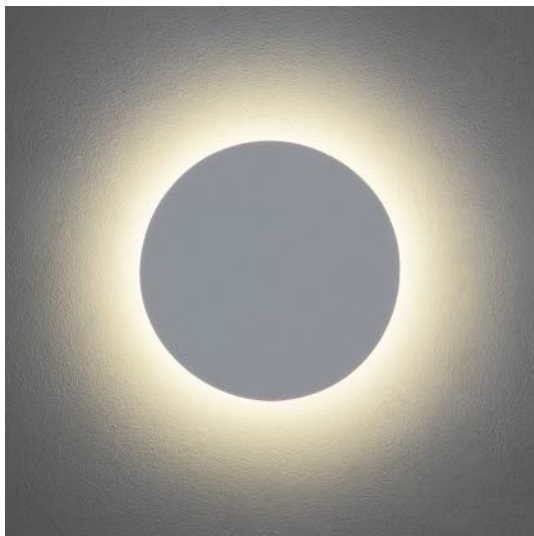

PRODUCT SPECIFICATION

GENERAL

FINISH:	Plaster	CABLE LENGTH:	Not Applicable
MAIN MATERIAL:	Plaster	GROSS WEIGHT:	4.33 (kg)
DIMENSIONS:	Ø: 350mm D: 38mm	CLASS:	CE (Class I)
INSTALLATION ORIENTATION:	Wall Mount	IP RATING:	IP20
CUT OUT HOLE:	Not Applicable	BATHROOM ZONE:	Zone 3
RECESS DEPTH:	Not Applicable	VOLTAGE:	Mains 230V
FIRE RATING:	Not Applicable	PRODUCT F MARK:	Suitable for mounting on flammable materials


LAMP

LIGHT SOURCE:	Per m LED strip	MACADAM ELIPSE:	Not Applicable
MAXIMUM WATTAGE:	0.9 x 14.4w	UGR:	To Be Advised
MAXIMUM LAMP LENGTH:	Not Applicable	BEAM ANGLE:	Not Applicable
LAMP INCLUDED?	Yes (Integral)	TILT ADJUSTMENT ANGLE:	Not Applicable
LUMINOUS FLUX:	477 (lm)	ROTATION ADJUSTMENT ANGLE:	Not Applicable
COLOUR TEMP:	3000 (K)	AVERAGE LIFESPAN:	Not Applicable
CRI:	60	L70:	To Be Advised
R9:	To Be Advised		

ELECTRICAL

SWITCHED:	No	SUPPLY FREQUENCY:	50/60 (Hz)
DIMMABLE:	No	DRIVER / BALLAST VOLTAGE:	220-240 (V)
DIMMING METHOD:	Not Applicable	DRIVER AVERAGE LIFESPAN:	35,000 (Hrs)
DRIVER OUTPUT CURRENT:	Not Applicable	EFFICACY:	Not Applicable
DRIVER OUTPUT VOLTAGE:	12 (V)	DRIVER / BALLAST INCLUDED?	Yes (Integral)

ADDITIONAL INFORMATION



BOX QUANTITY X6

PRODUCT ELEVATIONS

