

AXIOS 1200 LED II

astro

GENERAL

LOCATION:	Bathroom
CLASS:	CE (Class II)
IP RATING:	IP44
BATHROOM ZONE:	Zone 2, 3
DRIVER REQUIRED:	No
INSTALLATION ORIENTATION:	Wall Mount - Horizontal & Vertical
MAIN MATERIAL:	Metal - Aluminium
DIMENSIONS (mm):	H: 1200 W: 33 D: 106.65
CUT OUT HOLE (mm):	-
RECESS DEPTH (mm):	-
FIRE RATING:	-
CABLE LENGTH (mm):	-
GROSS WEIGHT (kg):	3.01

LAMP

LIGHT SOURCE:	LED Strip
WATTAGE:	22.7W
LAMP INCLUDED:	Yes (Integral)
MAXIMUM LAMP LENGTH (mm):	-
LUMINOUS FLUX (lm):	1282
COLOUR TEMP (K):	3000
CRI (Ra):	80
MACADAM ELLIPSE:	2900-3000K
TILT ADJUSTABLE ANGLE (°):	-
ROTATION ADJUSTABLE ANGLE (°):	-
LIFETIME (hrs):	53000
BEAM ANGLE (°):	-

ELECTRICAL

SWITCHED:	No
DIMMABLE:	-
DIMMING METHOD:	-
SUPPLY FREQUENCY (Hz):	47-63
DRIVER/BALLAST VOLTAGE (V):	180-264
DRIVER LIFETIME (hrs):	20000
EFFICACY (lm/W):	57

ADDITIONAL INFORMATION:

SHADE INCLUDED:	-
SHADE/DIFFUSER MATERIAL:	Polycarbonate
SHADE/DIFFUSER FINISH	White
F MARK:	Suitable for mounting on flammable materials






CODE: 1307014
FINISH: POLISHED CHROME

TO MAINTAIN THIS PRODUCT TO ITS BEST CONDITION, PLEASE VIEW OUR CARE AND CLEANING GUIDE ON THE SUPPORT SECTION OF THE ASTRO WEBSITE.

Pour entretenir au mieux ce produit, veuillez consulter notre guide d'entretien et de nettoyage, dans la rubrique d'aide sur le site Web d'Astro.

Um dieses Produkt im besten Zustand zu erhalten, beachten Sie bitte unseren Leitfaden zu Pflege und Reinigung im Abschnitt „Support“ auf der Astro-Website.

Per mantenere questo prodotto nelle sue migliori condizioni, consultare la nostra guida per la manutenzione e la pulizia nella sezione dedicata all'assistenza del sito Web Astro.

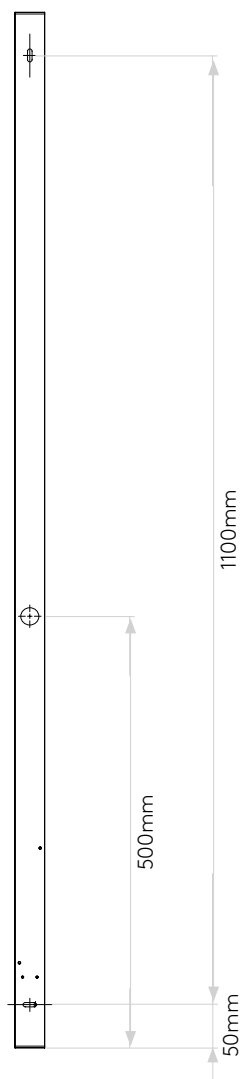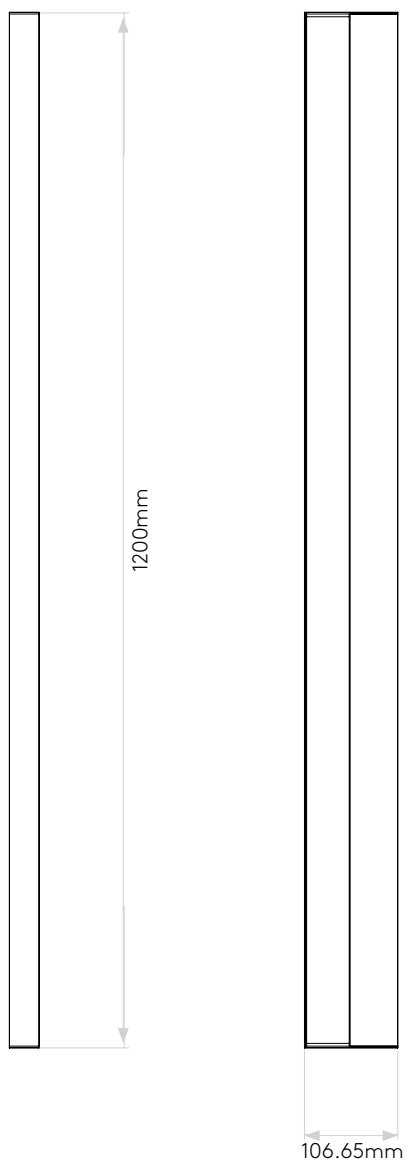

Please note that some dimensions may vary slightly due to manufacturing tolerances, this includes cable entry and fixing holes

Veuillez noter que certaines dimensions peuvent varier légèrement en raison des tolérances de fabrication, y compris l'entrée de câble et les trous de fixation.

Bitte beachten Sie, dass die Maße Fertigungstoleranzen unterliegen und daher in geringem Umfang von der angegebenen Größe abweichen können. Dies gilt auch für Kabeleingänge und Befestigungslöcher.

Si prega notare che possono esserci piccole variazioni in alcune dimensioni dovute alle tolleranze di produzione, queste includono l'ingresso del cavo e i fori di fissaggio.

AXIOS 600 LED

astro

GENERAL

CLASS:	CE (Class 2)
IP RATING:	IP44
BATHROOM ZONE:	Zone 2, 3
VOLTAGE:	Mains 230V
INSTALLATION ORIENTATION:	Wall mount
MAIN MATERIAL:	Metal - Aluminium
DIMENSIONS:	H: 600mm W: 33mm D: 105mm
CUT OUT HOLE:	Not applicable
RECESS DEPTH:	Not applicable
FIRE RATING:	Not applicable
CABLE LENGTH:	Not applicable
GROSS WEIGHT:	1.42Kg

LAMP

LIGHT SOURCE:	LED STRIP
MAXIMUM WATTAGE:	12.8W
LAMP INCLUDED:	Yes (Integral)
MAXIMUM LAMP LENGTH:	Not applicable
LUMINOUS FLUX:	435.8 lm
COLOUR TEMP:	3000K
CRI:	80
R9:	25.0
MACADAM ELLIPSE:	+/-100K
TILT ADJUSTABLE ANGLE:	Not applicable
ROTATION ADJUSTABLE ANGLE:	Not applicable
AVERAGE LIFESPAN:	50,000hrs
L70:	To be advised
BEAM ANGLE:	Not applicable

ELECTRICAL


SWITCHED:	No
DIMMABLE:	No
DIMMING METHOD:	Not applicable
DRIVER INCLUDED:	Yes (Integral)
DRIVER OUTPUT CURRENT:	Not applicable
DRIVER OUTPUT VOLTAGE:	12V
SUPPLY FREQUENCY:	47/63Hz
DRIVER / BALLAST VOLTAGE:	180-264V
DRIVER AVERAGE LIFESPAN:	20,000hrs
EFFICACY:	34.15lm/W

ADDITIONAL INFORMATION:

SHADE INCLUDED:	-
SHADE / DIFFUSER MATERIAL:	Polycarbonate
SHADE / DIFFUSER FINISH	White
F MARK:	Suitable for mounting on flammable materials



CODE: 7972
SKU: 1307007
FINISH: POLISHED CHROME

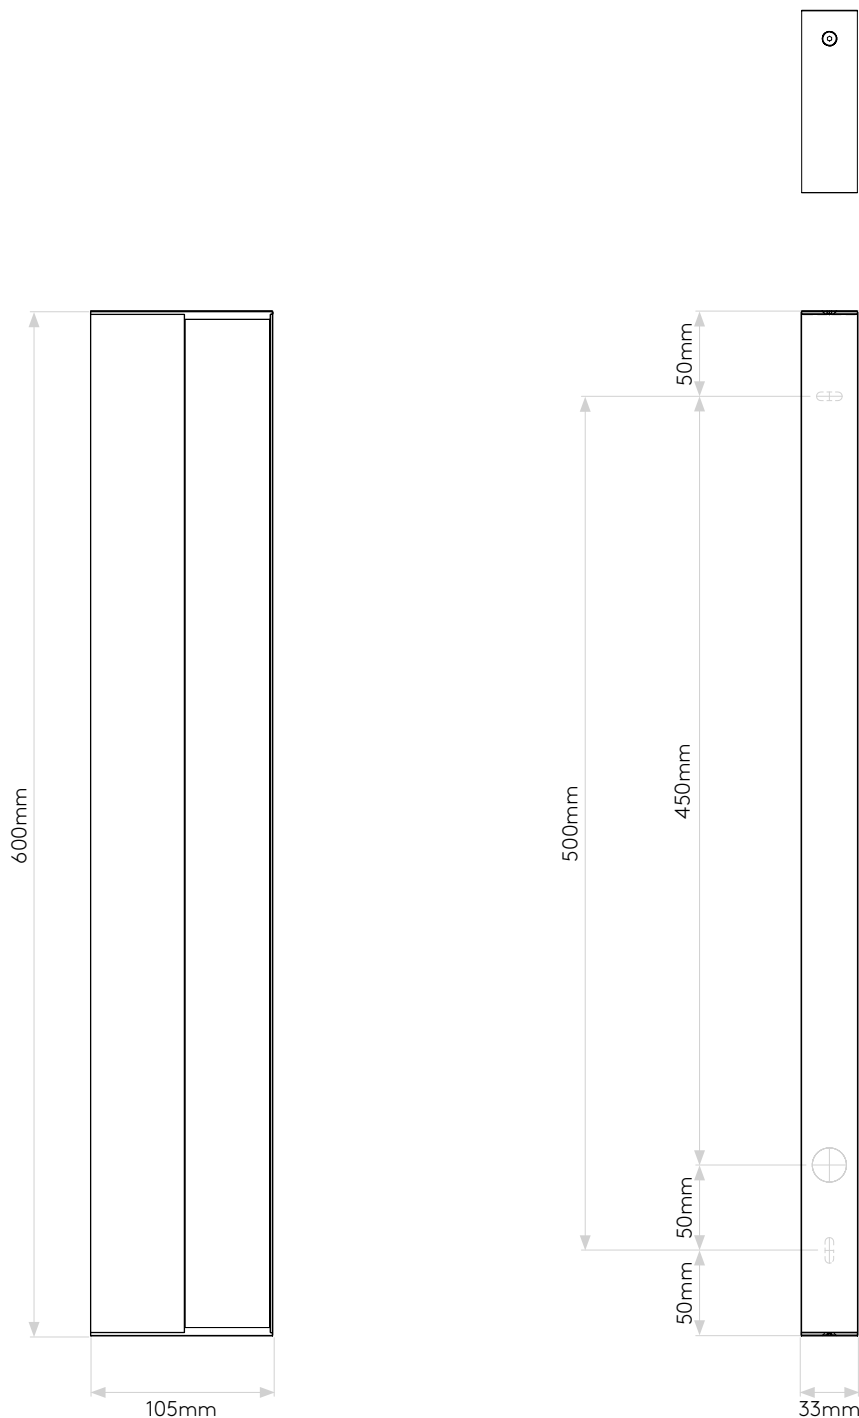

Please note that some dimensions may vary slightly due to manufacturing tolerances, this includes cable entry and fixing holes

Veuillez noter que certaines dimensions peuvent varier légèrement en raison des tolérances de fabrication, y compris l'entrée de câble et les trous de fixation.

Bitte beachten Sie, dass die Maße Fertigungstoleranzen unterliegen und daher in geringem Umfang von der angegebenen Größe abweichen können. Dies gilt auch für Kabeleingänge und Befestigungslöcher.

Si prega notare che possono esserci piccole variazioni in alcune dimensioni dovute alle tolleranze di produzione, queste includono l'ingresso del cavo e i fori di fissaggio.