

GENERAL

LOCATION:	Interior
CLASS:	CE (Class III)
IP RATING:	IP20
BATHROOM ZONE:	Zone 3
DRIVER REQUIRED:	Constant Current 350mA
INSTALLATION ORIENTATION:	Ceiling Mount
MAIN MATERIAL:	Metal - Aluminium
DIMENSIONS (mm):	H: 180 W: 95 D: 68.5
CUT OUT HOLE (mm):	L: 165 W: 85
RECESS DEPTH (mm):	-
FIRE RATING:	-
CABLE LENGTH (mm):	450
GROSS WEIGHT (kg):	0.7

LAMP


LIGHT SOURCE:	COB LED
WATTAGE:	2 X 6.1W
LAMP INCLUDED:	Yes (Integral)
MAXIMUM LAMP LENGTH (mm):	-
LUMINOUS FLUX (lm):	1123
COLOUR TEMP (K):	2700
CRI (Ra):	80
MACADAM ELLIPSE:	3-Step
TILT ADJUSTABLE ANGLE (°):	35
ROTATION ADJUSTABLE ANGLE (°):	360
LIFETIME (hrs):	42300
BEAM ANGLE (°):	36

ELECTRICAL

SWITCHED:	No
DIMMABLE:	Yes
DIMMING METHOD:	Control Gear Dependent
SUPPLY FREQUENCY (Hz):	-
DRIVER/BALLAST VOLTAGE (V):	-
DRIVER LIFETIME (hrs):	-
EFFICACY (lm/W):	91

ADDITIONAL INFORMATION:

SHADE INCLUDED:	-
SHADE/DIFFUSER MATERIAL:	-
SHADE/DIFFUSER FINISH	-
F MARK:	Suitable for mounting on flammable materials



CODE: 1256008

FINISH: ANODISED ALUMINIUM



CODE: 1256022





FINISH: MATT WHITE

TO MAINTAIN THIS PRODUCT TO ITS BEST CONDITION, PLEASE VIEW OUR CARE AND CLEANING GUIDE ON THE SUPPORT SECTION OF THE ASTRO WEBSITE.

Pour entretenir au mieux ce produit, veuillez consulter notre guide d'entretien et de nettoyage, dans la rubrique d'aide sur le site Web d'Astro.

Um dieses Produkt im besten Zustand zu erhalten, beachten Sie bitte unseren Leitfaden zu Pflege und Reinigung im Abschnitt „Support“ auf der Astro-Website.

Per mantenere questo prodotto nelle sue migliori condizioni, consultare la nostra guida per la manutenzione e la pulizia nella sezione dedicata all'assistenza del sito Web Astro.

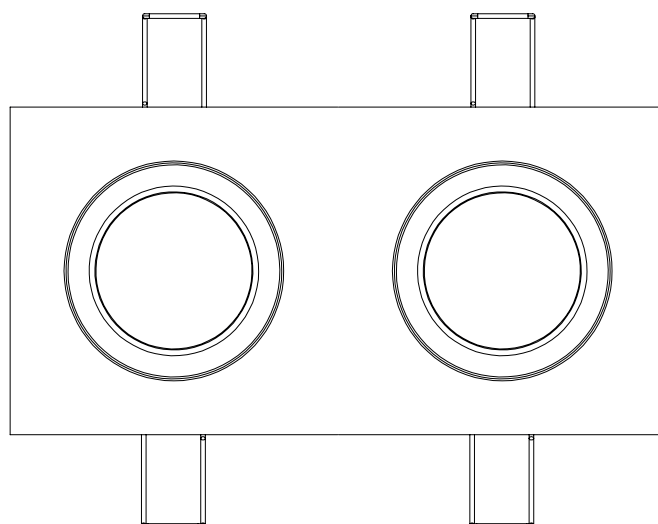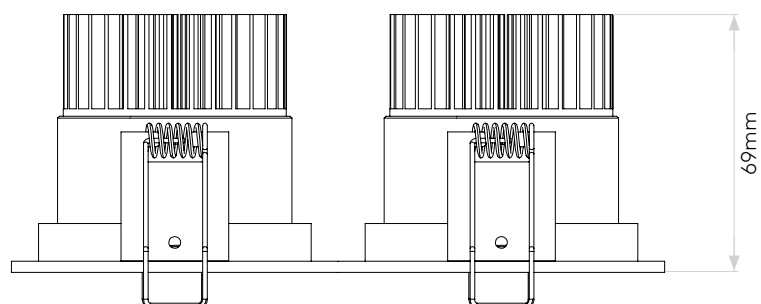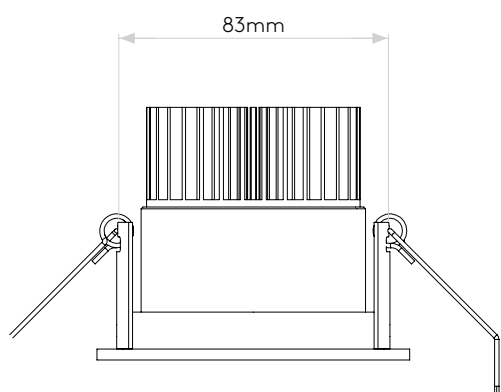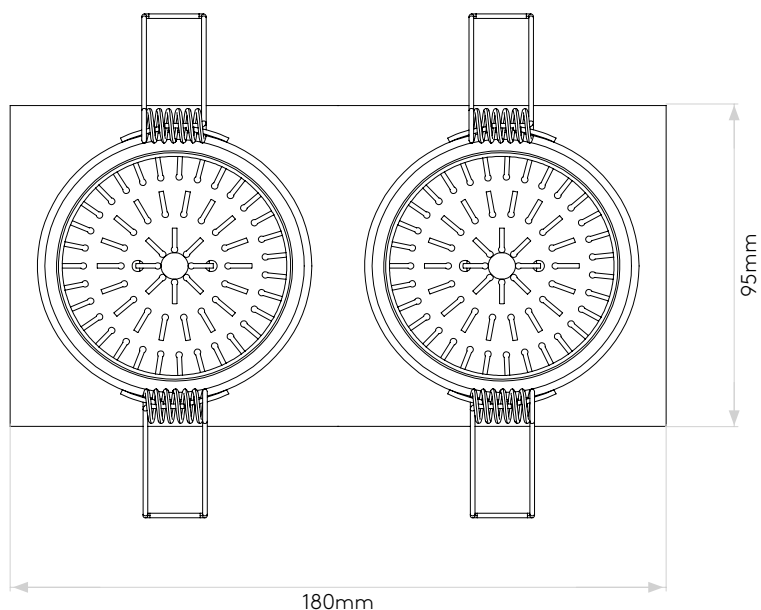

Please note that some dimensions may vary slightly due to manufacturing tolerances, this includes cable entry and fixing holes

Veuillez noter que certaines dimensions peuvent varier légèrement en raison des tolérances de fabrication, y compris l'entrée de câble et les trous de fixation.

Bitte beachten Sie, dass die Maße Fertigungstoleranzen unterliegen und daher in geringem Umfang von der angegebenen Größe abweichen können. Dies gilt auch für Kabeleingänge und Befestigungslöcher.

Si prega notare che possono esserci piccole variazioni in alcune dimensioni dovute alle tolleranze di produzione, queste includono l'ingresso del cavo e i fori di fissaggio.

APRILIA TWIN ADJ

astro

GENERAL

CLASS:	CE (Class 3)
IP RATING:	IP21
BATHROOM ZONE:	Zone 3
VOLTAGE:	Constant Current 350mA
INSTALLATION ORIENTATION:	Ceiling mount
MAIN MATERIAL:	Metal - Aluminium
DIMENSIONS:	H: 180mm W: 95mm D: 69mm
CUT OUT HOLE:	L: 165mm W: 85mm
RECESS DEPTH:	Not applicable
FIRE RATING:	Not applicable
CABLE LENGTH:	450mm
GROSS WEIGHT:	0.67Kg

LAMP

LIGHT SOURCE:	COB LED
MAXIMUM WATTAGE:	2 X 6.1W
LAMP INCLUDED:	Yes (Integral)
MAXIMUM LAMP LENGTH:	Not applicable
LUMINOUS FLUX:	1206.1 lm
COLOUR TEMP:	3000K
CRI:	80
R9:	13.0
MACADAM ELLIPSE:	3-Step
TILT ADJUSTABLE ANGLE:	35°
ROTATION ADJUSTABLE ANGLE:	360°
AVERAGE LIFESPAN:	36,300hrs
L70:	To be advised
BEAM ANGLE:	35.95°

ELECTRICAL





SWITCHED:	No
DIMMABLE:	Yes
DIMMING METHOD:	Control Gear Dependent
DRIVER INCLUDED:	Not applicable
DRIVER OUTPUT CURRENT:	Not applicable
DRIVER OUTPUT VOLTAGE:	Not applicable
SUPPLY FREQUENCY:	Not applicable
DRIVER / BALLAST VOLTAGE:	Not applicable
DRIVER AVERAGE LIFESPAN:	Not applicable
EFFICACY:	97.27lm/W

ADDITIONAL INFORMATION

SHADE INCLUDED	Not applicable
SHADE MATERIAL	Not applicable



CODE: 5749
SKU: 1256019
FINISH: MATT WHITE

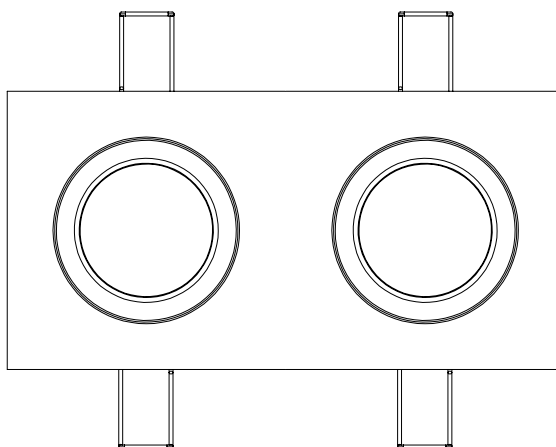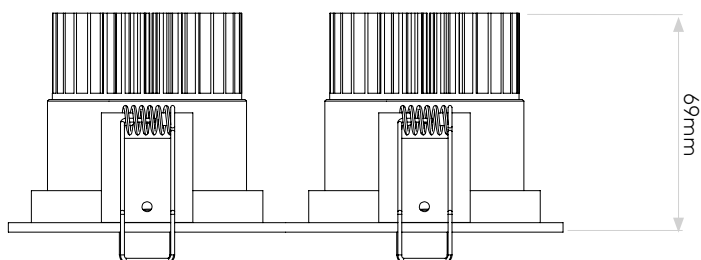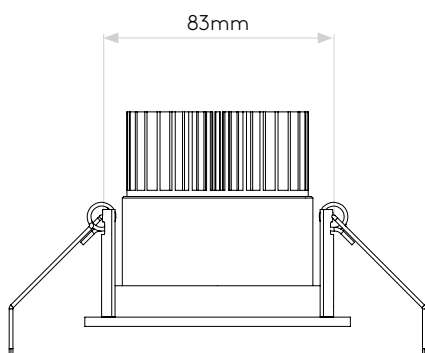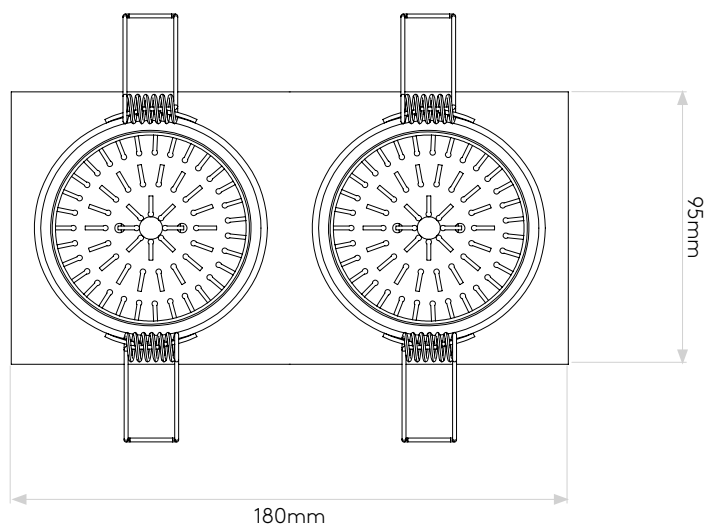

Please note that some dimensions may vary slightly due to manufacturing tolerances, this includes cable entry and fixing holes

Veuillez noter que certaines dimensions peuvent varier légèrement en raison des tolérances de fabrication, y compris l'entrée de câble et les trous de fixation.

Bitte beachten Sie, dass die Maße Fertigungstoleranzen unterliegen und daher in geringem Umfang von der angegebenen Größe abweichen können. Dies gilt auch für Kabeleingänge und Befestigungslöcher.

Si prega notare che possono esserci piccole variazioni in alcune dimensioni dovute alle tolleranze di produzione, queste includono l'ingresso del cavo e i fori di fissaggio.