

PARMA 160 0886
SKU 1187001

astro



PRODUCT SPECIFICATION

GENERAL

FINISH:	Plaster	CABLE LENGTH:	Not Applicable
MAIN MATERIAL:	Plaster	GROSS WEIGHT:	1.23 (kg)
DIMENSIONS:	H:160mm W: 70mm D:100mm	CLASS:	CE (Class I)
INSTALLATION ORIENTATION:	Wall Mount - Vertical	IP RATING:	IP20
CUT OUT HOLE:	Not Applicable	BATHROOM ZONE:	Zone 3
RECESS DEPTH:	Not Applicable	VOLTAGE:	Mains 230V
FIRE RATING:	Not Applicable	PRODUCT F MARK:	Suitable for mounting on flammable materials


LAMP

LIGHT SOURCE:	High-Power LED	MACADAM ELIPSE:	To Be Advised
MAXIMUM WATTAGE:	2 x 3W	UGR:	Not Applicable
MAXIMUM LAMP LENGTH:	Not Applicable	BEAM ANGLE:	Not Applicable
LAMP INCLUDED?	Yes (Integral)	TILT ADJUSTMENT ANGLE:	Not Applicable
LUMINOUS FLUX:	134 (lm)	ROTATION ADJUSTMENT ANGLE:	Not Applicable
COLOUR TEMP:	3000 (K)	AVERAGE LIFESPAN:	60,500 (Hrs)
CRI:	80	L70:	To Be Advised
R9:	20.6		

ELECTRICAL




SWITCHED:	No	SUPPLY FREQUENCY:	50/60 (Hz)
DIMMABLE:	No	DRIVER / BALLAST VOLTAGE:	220-240 (V)
DIMMING METHOD:	Not Applicable	DRIVER AVERAGE LIFESPAN:	60,000 (Hrs)
DRIVER OUTPUT CURRENT:	700 (mA)	EFFICACY:	21.04 (lm/W)
DRIVER OUTPUT VOLTAGE:	Not Applicable	DRIVER / BALLAST INCLUDED?	Yes (Integral)

ADDITIONAL INFORMATION



BOX QUANTITY X12

PRODUCT ELEVATIONS

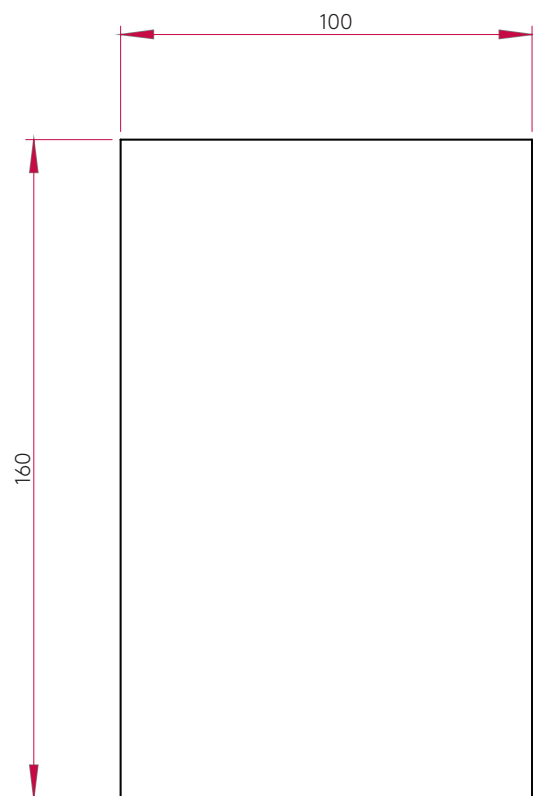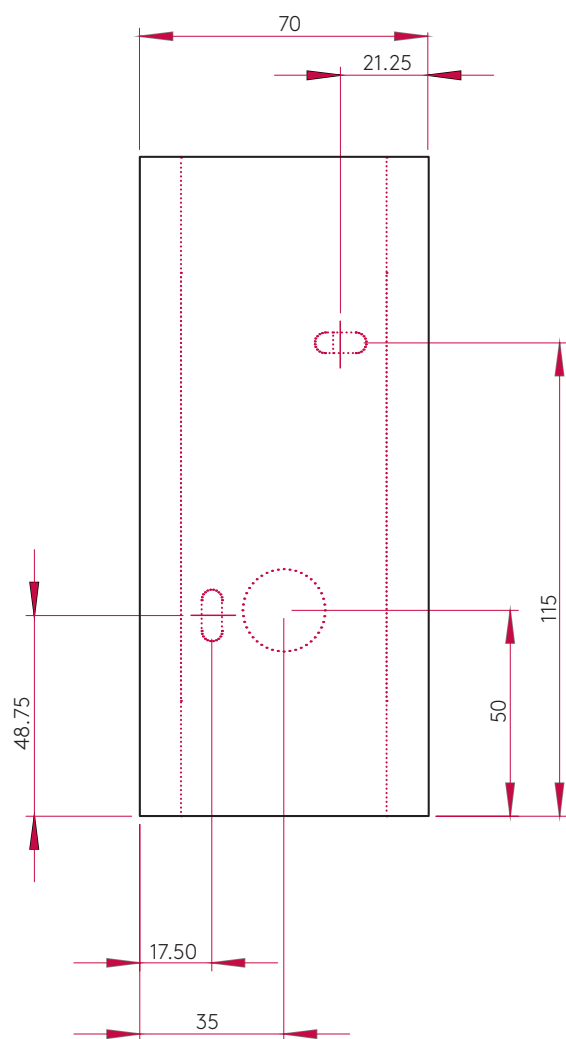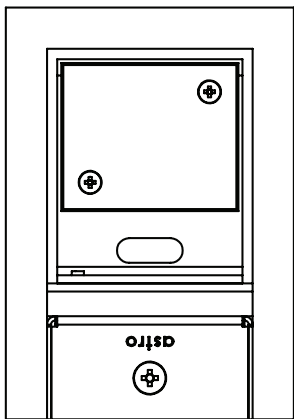

PARMA 160 7598
SKU 1187014

astro



PRODUCT SPECIFICATION

GENERAL

FINISH:	Plaster	CABLE LENGTH:	Not Applicable
MAIN MATERIAL:	Plaster	GROSS WEIGHT:	1.23 (kg)
DIMENSIONS:	H: 160mm W: 70mm D: 100mm	CLASS:	CE (Class I)
INSTALLATION ORIENTATION:	Wall Mount - Vertical	IP RATING:	IP20
CUT OUT HOLE:	Not Applicable	BATHROOM ZONE:	Zone 3
RECESS DEPTH:	Not Applicable	VOLTAGE:	Mains 230V
FIRE RATING:	Not Applicable	PRODUCT F MARK:	Suitable for mounting on flammable materials


LAMP

LIGHT SOURCE:	High-Power LED	MACADAM ELIPSE:	To Be Advised
MAXIMUM WATTAGE:	2 x 3W	UGR:	Not Applicable
MAXIMUM LAMP LENGTH:	Not Applicable	BEAM ANGLE:	Not Applicable
LAMP INCLUDED?	Yes (Integral)	TILT ADJUSTMENT ANGLE:	Not Applicable
LUMINOUS FLUX:	134 (lm)	ROTATION ADJUSTMENT ANGLE:	Not Applicable
COLOUR TEMP:	2700 (K)	AVERAGE LIFESPAN:	60,500 (Hrs)
CRI:	80	L70:	To Be Advised
R9:	20.6		

ELECTRICAL

SWITCHED:	No	SUPPLY FREQUENCY:	50/60 (Hz)
DIMMABLE:	No	DRIVER / BALLAST VOLTAGE:	220-240 (V)
DIMMING METHOD:	Not Applicable	DRIVER AVERAGE LIFESPAN:	60,000 (Hrs)
DRIVER OUTPUT CURRENT:	700 (mA)	EFFICACY:	21.04 (lm/W)
DRIVER OUTPUT VOLTAGE:	Not Applicable	DRIVER / BALLAST INCLUDED?	Yes (Integral)

ADDITIONAL INFORMATION



BOX QUANTITY X12

PRODUCT ELEVATIONS

