


ECLIPSE SQUARE 300 7610

SKU 1333004

astro

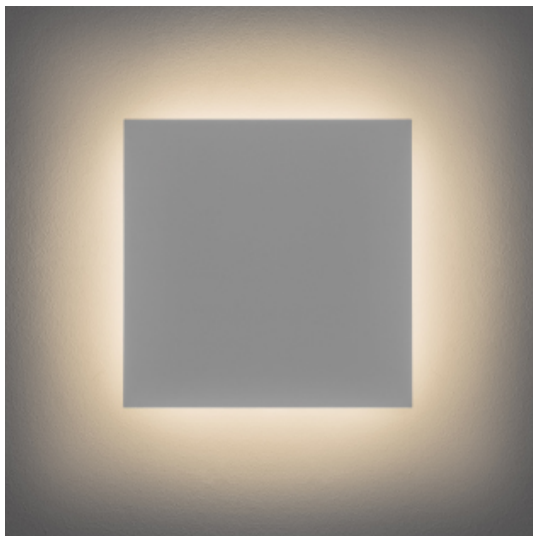

PRODUCT SPECIFICATION

GENERAL

FINISH:	Plaster	CABLE LENGTH:	Not Applicable
MAIN MATERIAL:	Plaster	GROSS WEIGHT:	3.3 (kg)
DIMENSIONS:	H: 300mm W: 300mm D: 38mm	CLASS:	CE (Class I)
INSTALLATION ORIENTATION:	Wall Mount - Vertical	IP RATING:	IP20
CUT OUT HOLE:	Not Applicable	BATHROOM ZONE:	Zone 3
RECESS DEPTH:	Not Applicable	VOLTAGE:	Mains 230V
FIRE RATING:	Not Applicable	PRODUCT F MARK:	Suitable for mounting on flammable materials


LAMP

LIGHT SOURCE:	per m LED Strip	MACADAM ELIPSE:	Not Applicable
MAXIMUM WATTAGE:	0.9 x 14.4W	UGR:	To Be Advised
MAXIMUM LAMP LENGTH:	Not Applicable	BEAM ANGLE:	Not Applicable
LAMP INCLUDED?	Yes (Integral)	TILT ADJUSTMENT ANGLE:	Not Applicable
LUMINOUS FLUX:	715.6 (lm)	ROTATION ADJUSTMENT ANGLE:	Not Applicable
COLOUR TEMP:	2700 (K)	AVERAGE LIFESPAN:	Not Applicable
CRI:	60	L70:	To Be Advised
R9:	To Be Advised		


ELECTRICAL

SWITCHED:	No	SUPPLY FREQUENCY:	50/60 (Hz)
DIMMABLE:	No	DRIVER/BALLAST VOLTAGE:	220-240 (V)
DIMMING METHOD:	Not Applicable	DRIVER AVERAGE LIFESPAN:	30000 (Hrs)
DRIVER OUTPUT CURRENT:	Not Applicable	EFFICACY:	47.4(lm/W)
DRIVER OUTPUT VOLTAGE:	12 (V)	DRIVER INCLUDED?	Yes (Integral)

ADDITIONAL INFORMATION




THIS PRODUCT CAN BE SPRAY PAINTED



BOX QUANTITY X6


PRODUCT ELEVATIONS

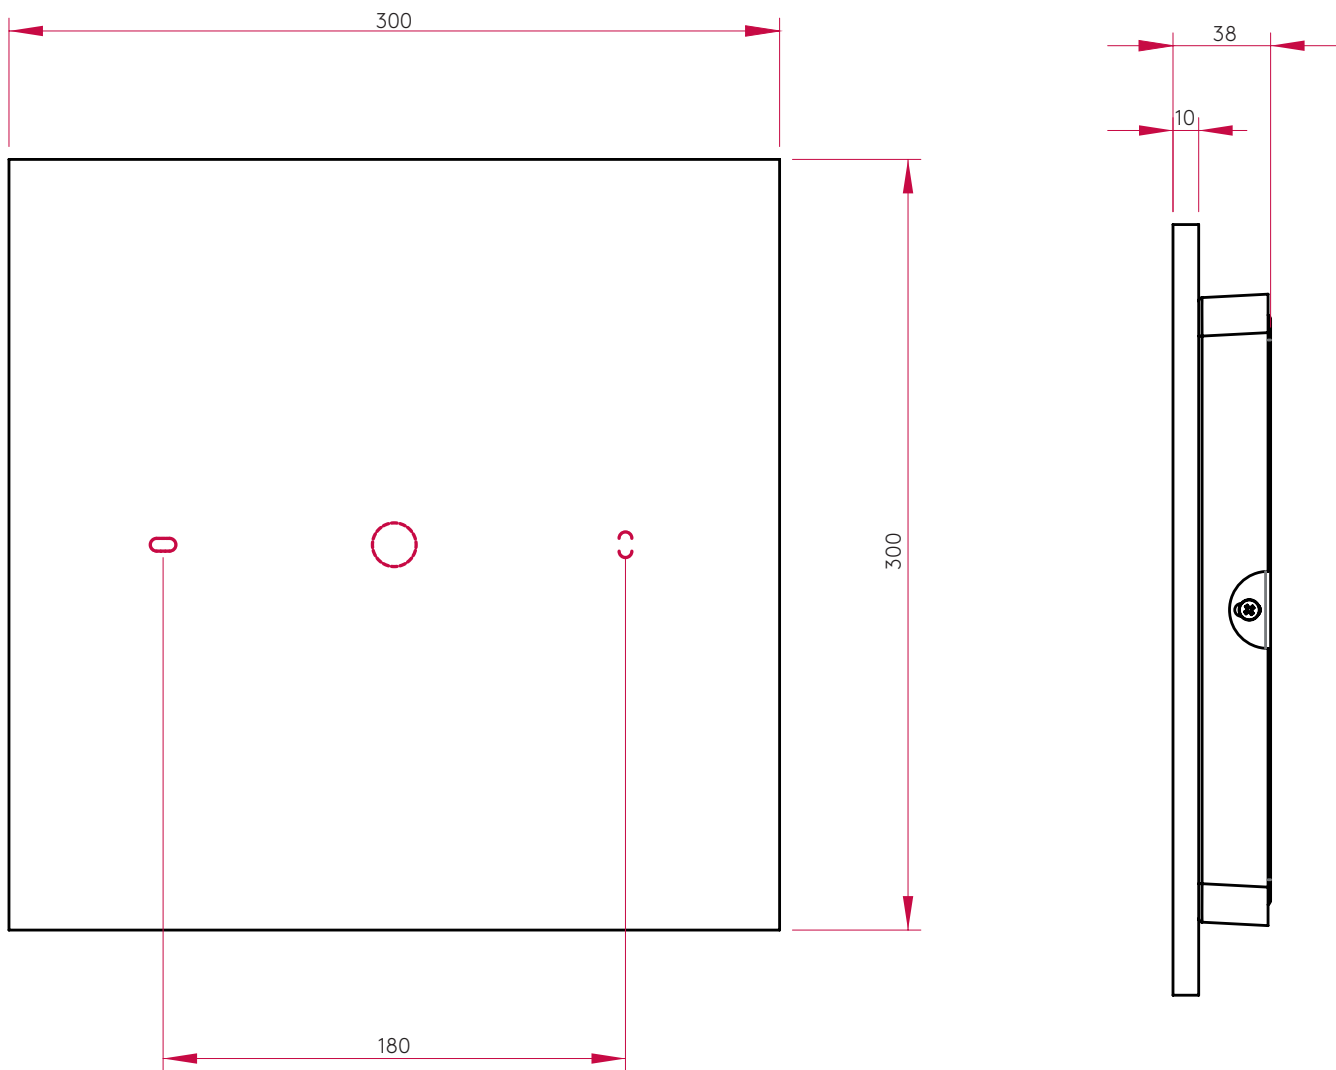

ECLIPSE SQUARE 300 7610

SKU 1333004

astro

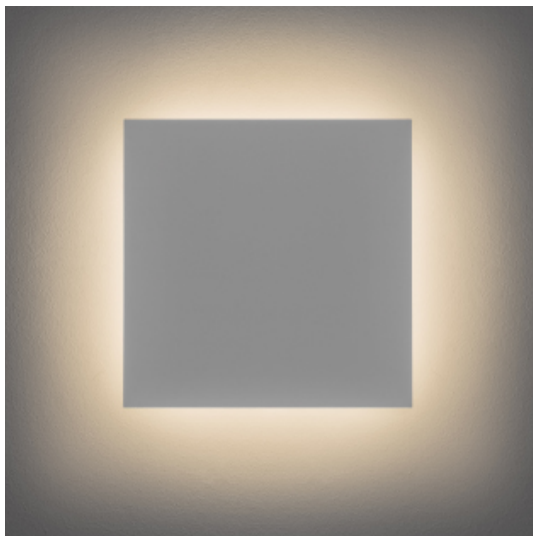

PRODUCT SPECIFICATION

GENERAL

FINISH:	Plaster	CABLE LENGTH:	Not Applicable
MAIN MATERIAL:	Plaster	GROSS WEIGHT:	3.3 (kg)
DIMENSIONS:	H: 300mm W: 300mm D: 38mm	CLASS:	CE (Class I)
INSTALLATION ORIENTATION:	Wall Mount - Vertical	IP RATING:	IP20
CUT OUT HOLE:	Not Applicable	BATHROOM ZONE:	Zone 3
RECESS DEPTH:	Not Applicable	VOLTAGE:	Mains 230V
FIRE RATING:	Not Applicable	PRODUCT F MARK:	Suitable for mounting on flammable materials


LAMP

LIGHT SOURCE:	per m LED Strip	MACADAM ELIPSE:	Not Applicable
MAXIMUM WATTAGE:	0.9 x 14.4W	UGR:	To Be Advised
MAXIMUM LAMP LENGTH:	Not Applicable	BEAM ANGLE:	Not Applicable
LAMP INCLUDED?	Yes (Integral)	TILT ADJUSTMENT ANGLE:	Not Applicable
LUMINOUS FLUX:	715.6 (lm)	ROTATION ADJUSTMENT ANGLE:	Not Applicable
COLOUR TEMP:	2700 (K)	AVERAGE LIFESPAN:	Not Applicable
CRI:	60	L70:	To Be Advised
R9:	To Be Advised		


ELECTRICAL

SWITCHED:	No	SUPPLY FREQUENCY:	50/60 (Hz)
DIMMABLE:	No	DRIVER/BALLAST VOLTAGE:	220-240 (V)
DIMMING METHOD:	Not Applicable	DRIVER AVERAGE LIFESPAN:	30000 (Hrs)
DRIVER OUTPUT CURRENT:	Not Applicable	EFFICACY:	47.4(lm/W)
DRIVER OUTPUT VOLTAGE:	12 (V)	DRIVER INCLUDED?	Yes (Integral)

ADDITIONAL INFORMATION



THIS PRODUCT CAN BE SPRAY PAINTED



BOX QUANTITY X6

PRODUCT ELEVATIONS

