

ALTEA 360 LED 8014

SKU 1133005

astro



PRODUCT SPECIFICATION

GENERAL

FINISH:	Polished Chrome	CABLE LENGTH:	Not Applicable
MAIN MATERIAL:	Metal - Zinc	GROSS WEIGHT:	1.46 (Kg)
DIMENSIONS:	H: 360mm W: 90mm D: 59mm	CLASS:	CE (Class II)
INSTALLATION ORIENTATION:	Wall Mount - Vertical & Horizontal	IP RATING:	IP44
CUT OUT HOLE:	Not Applicable	BATHROOM ZONE:	Zone 2, 3
RECESS DEPTH:	Not Applicable	VOLTAGE:	Mains 230V
FIRE RATING:	To Be Advised	PRODUCT F MARK:	Suitable for mounting on flammable materials


LAMP

LIGHT SOURCE:	LED Strip	MACADAM ELLIPSE:	+ / - 100K
MAXIMUM WATTAGE:	11.2W	UGR:	Not Applicable
MAXIMUM LAMP LENGTH:	Not Applicable	BEAM ANGLE:	Not Applicable
LAMP INCLUDED?	Yes (Integral)	TILT ADJUSTMENT ANGLE:	Not Applicable
LUMINOUS FLUX:	660 (lm)	ROTATION ADJUSTMENT ANGLE:	Not Applicable
COLOUR TEMP:	3000 (K)	AVERAGE LIFESPAN:	50,000 (Hrs)
CRI:	80	L70:	To Be Advised
R9:	4.2		

ELECTRICAL


SWITCHED:	No	SUPPLY FREQUENCY:	50/60 (Hz)
DIMMABLE:	No	DRIVER / BALLAST VOLTAGE:	180-264 (V)
DIMMING METHOD:	Not Applicable	DRIVER AVERAGE LIFESPAN:	Not Applicable
DRIVER OUTPUT CURRENT:	Not Applicable	EFFICACY:	43.07 (lm/W)
DRIVER OUTPUT VOLTAGE:	12 (V)	DRIVER / BALLAST INCLUDED?	Yes (Integral)

ADDITIONAL INFORMATION



BOX QUANTITY X9

PRODUCT ELEVATIONS

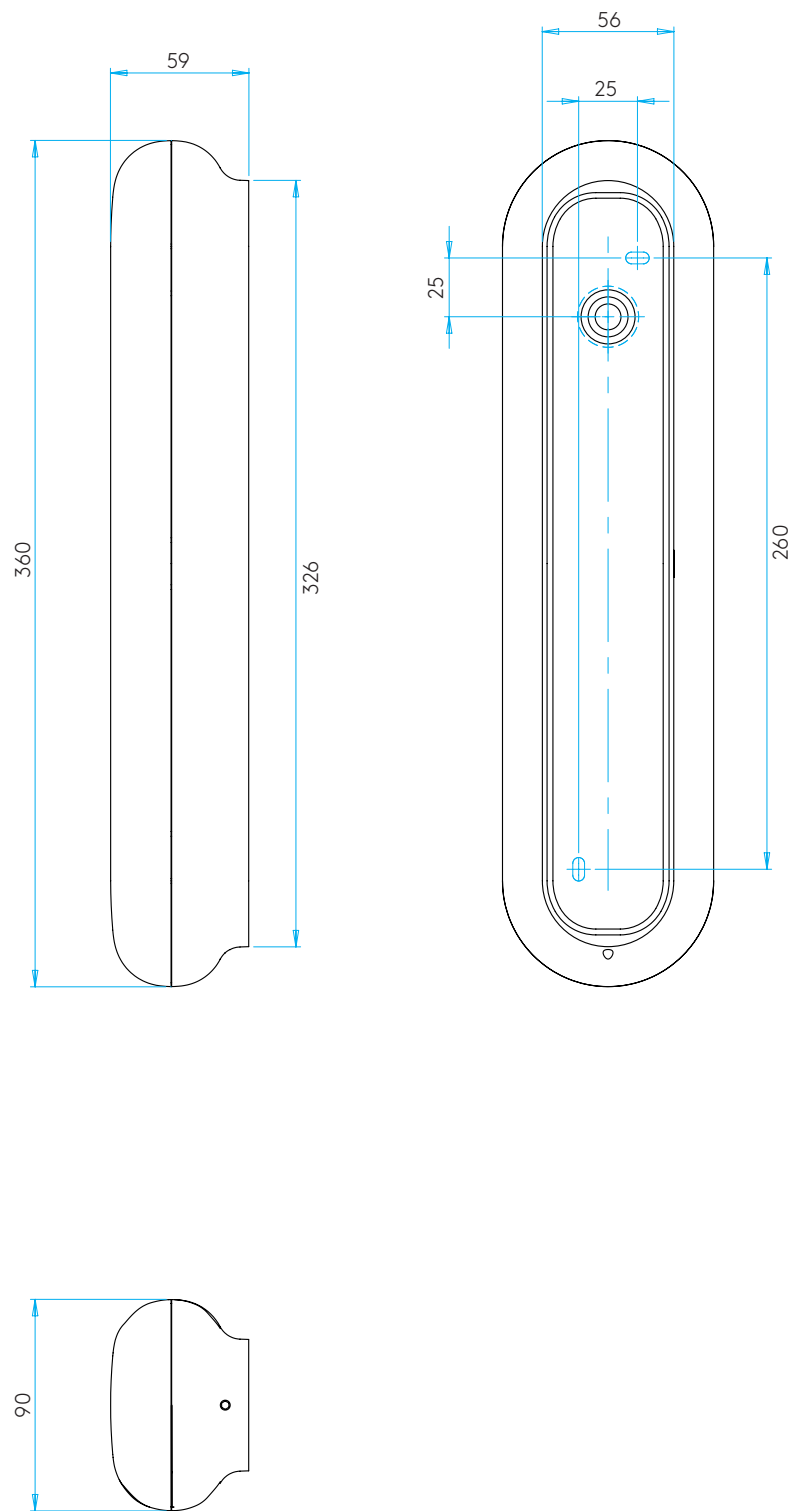

ALTEA 500 LED 8015

SKU 1133006

astro



PRODUCT SPECIFICATION

GENERAL

FINISH:	Polished Chrome	CABLE LENGTH:	Not Applicable
MAIN MATERIAL:	Metal - Zinc	GROSS WEIGHT:	To Be Advised
DIMENSIONS:	H: 500mm W: 90mm D: 59mm	CLASS:	CE (Class II)
INSTALLATION ORIENTATION:	Wall Mount - Horizontal/Vertical	IP RATING:	IP44
CUT OUT HOLE:	Not Applicable	BATHROOM ZONE:	Zone 2, 3
RECESS DEPTH:	Not Applicable	VOLTAGE:	Mains 230V
FIRE RATING:	To Be Advised	PRODUCT F MARK:	Suitable for mounting on flammable materials


LAMP

LIGHT SOURCE:	LED Strip	MACADAM ELLIPSE:	To Be Advised
MAXIMUM WATTAGE:	15.1W	UGR:	To Be Advised
MAXIMUM LAMP LENGTH:	Not Applicable	BEAM ANGLE:	To Be Advised
LAMP INCLUDED?	Yes (Integral)	TILT ADJUSTMENT ANGLE:	Not Applicable
LUMINOUS FLUX:	1015 (lm)	ROTATION ADJUSTMENT ANGLE:	Not Applicable
COLOUR TEMP:	3000 (K)	AVERAGE LIFESPAN:	Not Applicable
CRI:	80	L70:	To Be Advised
R9:	2.9		

ELECTRICAL

SWITCHED:	No	SUPPLY FREQUENCY:	50/60 (Hz)
DIMMABLE:	Not Applicable	DRIVER / BALLAST VOLTAGE:	90-264 (V)
DIMMING METHOD:	Not Applicable	DRIVER AVERAGE LIFESPAN:	20,000 (Hrs)
DRIVER OUTPUT CURRENT:	350 (mA)	EFFICACY:	67.13 (lm/W)
DRIVER OUTPUT VOLTAGE:	12V	DRIVER / BALLAST INCLUDED?	Yes (Integral)

ADDITIONAL INFORMATION



BOX QUANTITY:
To Be Advised

PRODUCT ELEVATIONS

