




## DIMENSIONS



## AWARDS



|           |                                  |
|-----------|----------------------------------|
| Name      | BLACK FOSTER ASYM TRI 15 2700K N |
| Reference | A3736010N                        |
| Color     | Matt black                       |
| RAL       | 9005                             |
| Category  | CEILING RECESSED                 |

## PRODUCT

|                             |                           |
|-----------------------------|---------------------------|
| Light source                | LED                       |
| Gross luminous flux         | 2850 Lm                   |
| Power                       | 31,5 W                    |
| Power values of the system  | 31,5 W                    |
| Colour temperature          | 2700 K                    |
| Colour Rendering Index      | CRI>90                    |
| Chromatic stability         | MacAdam Step 3            |
| Light beam angle            | 38°                       |
| Lighting efficiency         | 90%                       |
| Efficacy                    | 90 Lm/W                   |
| Current intensity           | 700 mA                    |
| Control through bluetooth   | Please Consult            |
| Driver                      | Included - Connected      |
| Emergency power supply      | Please Consult            |
| Electrical insulation class | <input type="checkbox"/>  |
| Voltage                     | 220 V/240 V               |
| Frequency                   | 50/60 Hz                  |
| Energy efficiency           | A                         |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h |

## LIGHTING INFORMATION


|                      |                                                             |
|----------------------|-------------------------------------------------------------|
| Ingress Protection   | IP20                                                        |
| Recess measurements  | 50 × 652 mm.                                                |
| Weight               | 1310 g.                                                     |
| Packaged weight      | 1790 g.                                                     |
| Packaging dimensions | D105 × 830 mm                                               |
| Units per package    | 1                                                           |
| Materials            | Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate |

## OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

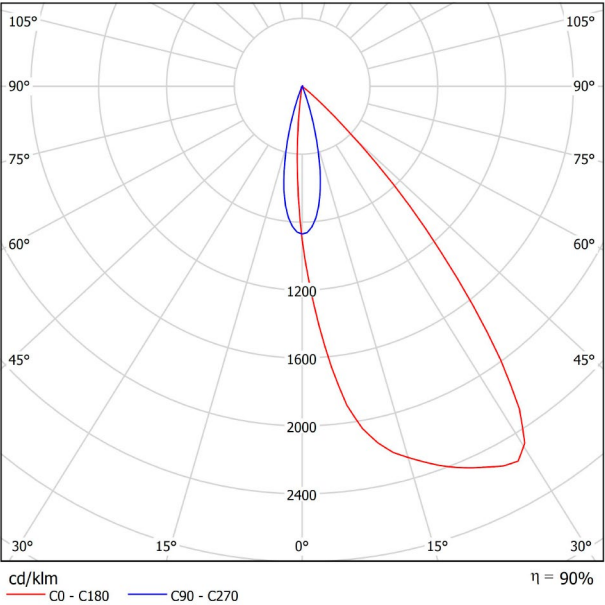


CONICAL DIAGRAM

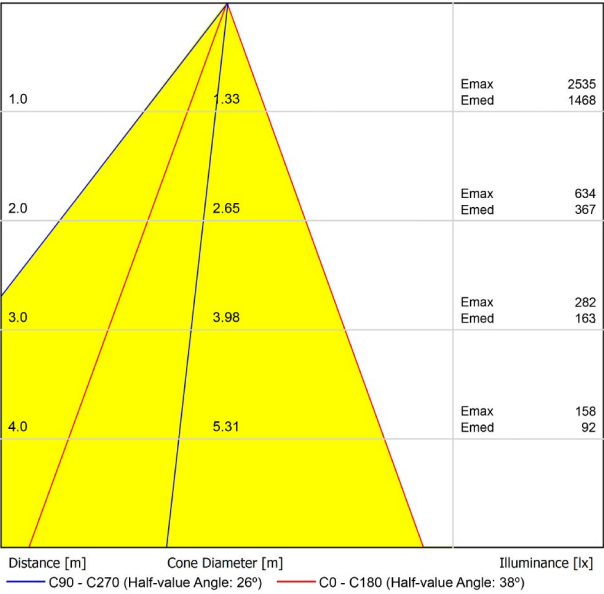



## DIMENSIONS



## AWARDS



|           |                                  |
|-----------|----------------------------------|
| Name      | BLACK FOSTER ASYM TRI 15 3000K N |
| Reference | A3736011N                        |
| Color     | Matt black                       |
| RAL       | 9005                             |
| Category  | CEILING RECESSED                 |

## PRODUCT

BLACK FOSTER ASYM TRI 15 3000K N

A3736011N

Matt black

9005

CEILING RECESSED

## LIGHTING INFORMATION

|                             |                           |
|-----------------------------|---------------------------|
| Light source                | LED                       |
| Gross luminous flux         | 3150 Lm                   |
| Power                       | 31,5 W                    |
| Power values of the system  | 31,5 W                    |
| Colour temperature          | 3000 K                    |
| Colour Rendering Index      | CRI>90                    |
| Chromatic stability         | MacAdam Step 3            |
| Light beam angle            | 38°                       |
| Lighting efficiency         | 90%                       |
| Efficacy                    | 100 Lm/W                  |
| Current intensity           | 700 mA                    |
| Control through bluetooth   | Please Consult            |
| Driver                      | Included - Connected      |
| Emergency power supply      | Please Consult            |
| Electrical insulation class | <input type="checkbox"/>  |
| Voltage                     | 220 V/240 V               |
| Frequency                   | 50/60 Hz                  |
| Energy efficiency           | A+                        |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h |


## OTHER DATA

|                      |                                                             |
|----------------------|-------------------------------------------------------------|
| Ingress Protection   | IP20                                                        |
| Recess measurements  | 50 × 652 mm.                                                |
| Weight               | 1310 g.                                                     |
| Packaged weight      | 1790 g.                                                     |
| Packaging dimensions | D105 × 830 mm                                               |
| Units per package    | 1                                                           |
| Materials            | Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate |




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

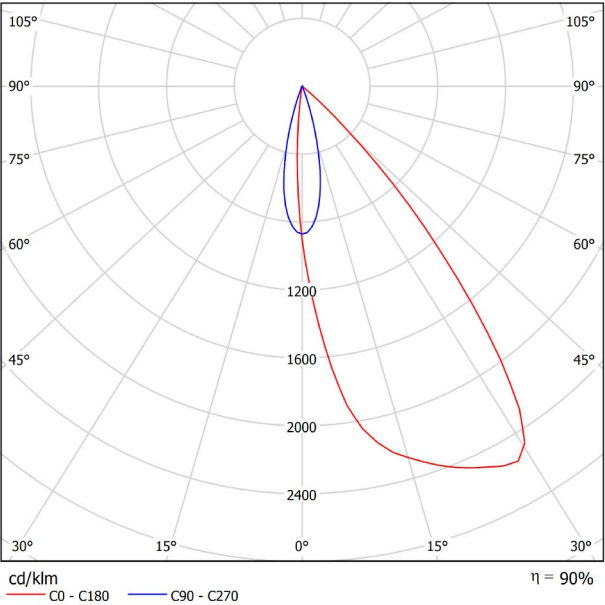


CONICAL DIAGRAM

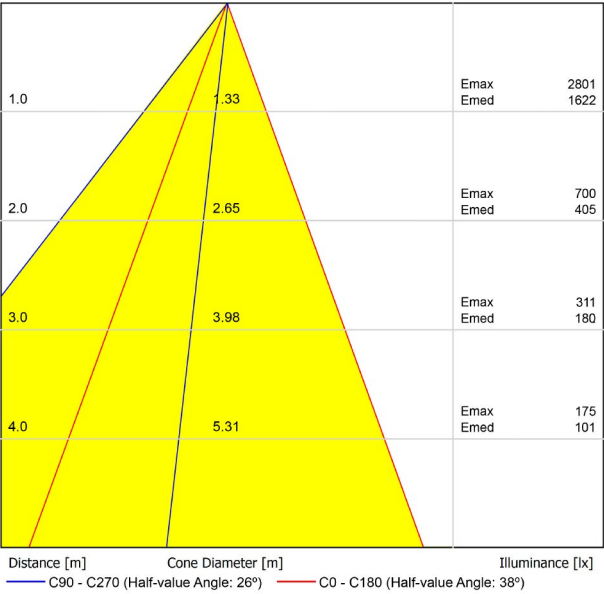



## DIMENSIONS



## AWARDS



|           |                                  |
|-----------|----------------------------------|
| Name      | BLACK FOSTER ASYM TRI 15 4000K N |
| Reference | A3736012N                        |
| Color     | Matt black                       |
| RAL       | 9005                             |
| Category  | CEILING RECESSED                 |

## PRODUCT

|                             |                           |
|-----------------------------|---------------------------|
| Light source                | LED                       |
| Gross luminous flux         | 3750 Lm                   |
| Power                       | 31,5 W                    |
| Power values of the system  | 31,5 W                    |
| Colour temperature          | 4000 K                    |
| Colour Rendering Index      | CRI>90                    |
| Chromatic stability         | MacAdam Step 3            |
| Light beam angle            | 38°                       |
| Lighting efficiency         | 90%                       |
| Efficacy                    | 119 Lm/W                  |
| Current intensity           | 700 mA                    |
| Control through bluetooth   | Please Consult            |
| Driver                      | Included - Connected      |
| Emergency power supply      | Please Consult            |
| Electrical insulation class | <input type="checkbox"/>  |
| Voltage                     | 220 V/240 V               |
| Frequency                   | 50/60 Hz                  |
| Energy efficiency           | A+                        |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h |

## LIGHTING INFORMATION


|                      |                                                             |
|----------------------|-------------------------------------------------------------|
| Ingress Protection   | IP20                                                        |
| Recess measurements  | 50 × 652 mm.                                                |
| Weight               | 1310 g.                                                     |
| Packaged weight      | 1790 g.                                                     |
| Packaging dimensions | D105 × 830 mm                                               |
| Units per package    | 1                                                           |
| Materials            | Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate |

## OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

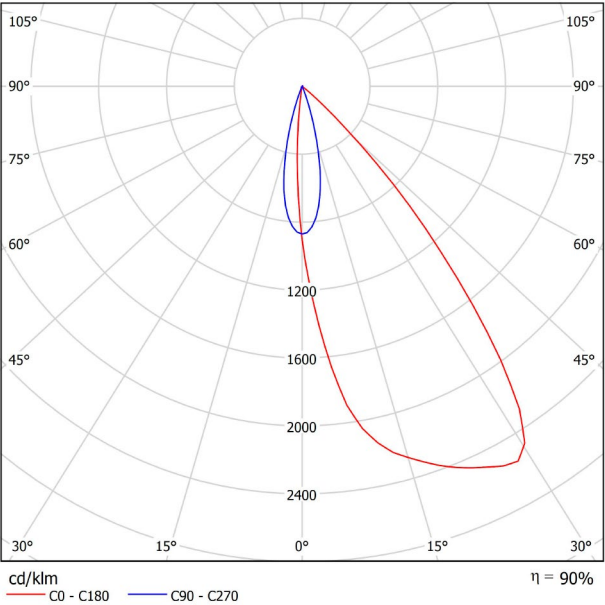


CONICAL DIAGRAM

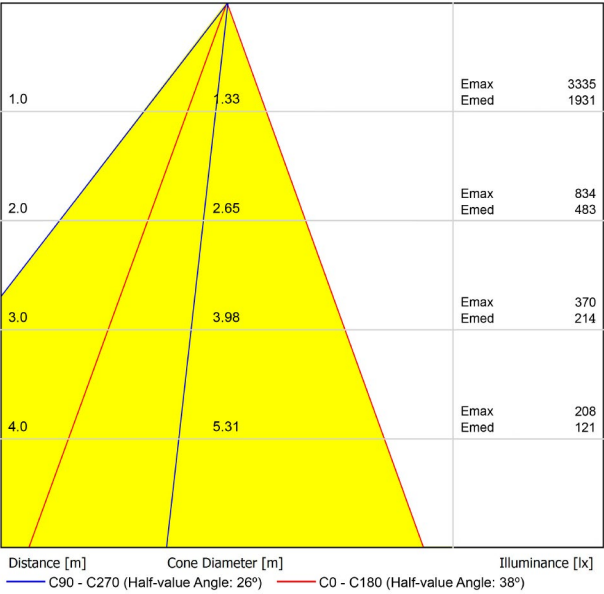



## DIMENSIONS



## AWARDS



|           |                                           |
|-----------|-------------------------------------------|
| Name      | BLACK FOSTER ASYM TRI 15 DIM PUSH 2700K N |
| Reference | A3736020N                                 |
| Color     | Matt black                                |
| RAL       | 9005                                      |
| Category  | CEILING RECESSED                          |

## PRODUCT

|                             |                           |
|-----------------------------|---------------------------|
| Light source                | LED                       |
| Gross luminous flux         | 2850 Lm                   |
| Power                       | 31,5 W                    |
| Power values of the system  | 31,5 W                    |
| Colour temperature          | 2700 K                    |
| Colour Rendering Index      | CRI>90                    |
| Chromatic stability         | MacAdam Step 3            |
| Light beam angle            | 38°                       |
| Lighting efficiency         | 90%                       |
| Efficacy                    | 90 Lm/W                   |
| Current intensity           | 700 mA                    |
| Dimming                     | Push                      |
| Control through bluetooth   | Please Consult            |
| Driver                      | Included - Connected      |
| Emergency power supply      | Please Consult            |
| Electrical insulation class | □                         |
| Voltage                     | 220 V/240 V               |
| Frequency                   | 50/60 Hz                  |
| Energy efficiency           | A                         |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h |

## LIGHTING INFORMATION


|                      |                                                             |
|----------------------|-------------------------------------------------------------|
| Ingress Protection   | IP20                                                        |
| Recess measurements  | 50 × 652 mm.                                                |
| Weight               | 1320 g.                                                     |
| Packaged weight      | 1800 g.                                                     |
| Packaging dimensions | D105 × 830 mm                                               |
| Units per package    | 1                                                           |
| Materials            | Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate |

## OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

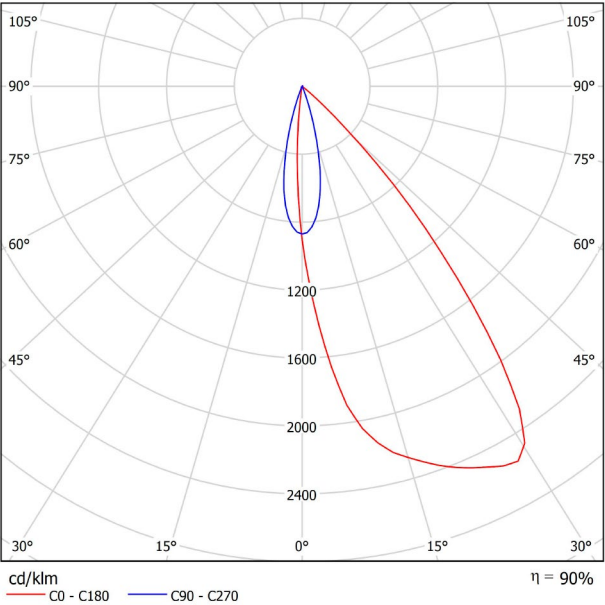


CONICAL DIAGRAM

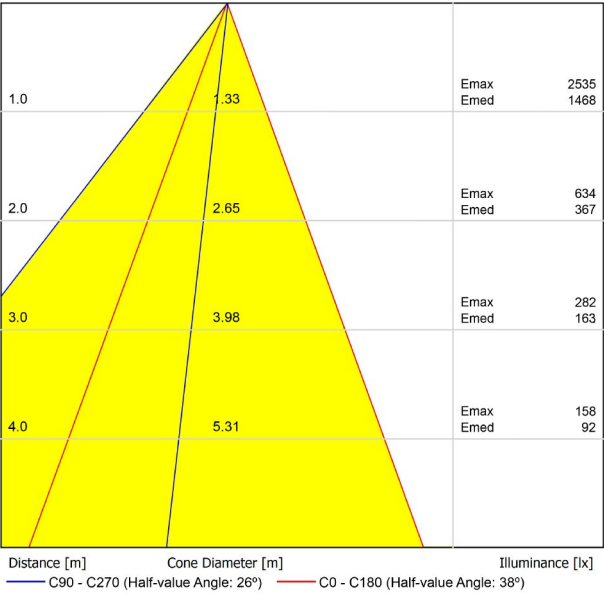



## DIMENSIONS



## AWARDS



|           |                                           |
|-----------|-------------------------------------------|
| Name      | BLACK FOSTER ASYM TRI 15 DIM PUSH 3000K N |
| Reference | A3736021N                                 |
| Color     | Matt black                                |
| RAL       | 9005                                      |
| Category  | CEILING RECESSED                          |

## PRODUCT

BLACK FOSTER ASYM TRI 15 DIM PUSH 3000K N

A3736021N

Matt black

9005

CEILING RECESSED

## LIGHTING INFORMATION

|                             |                           |
|-----------------------------|---------------------------|
| Light source                | LED                       |
| Gross luminous flux         | 3150 Lm                   |
| Power                       | 31,5 W                    |
| Power values of the system  | 31,5 W                    |
| Colour temperature          | 3000 K                    |
| Colour Rendering Index      | CRI>90                    |
| Chromatic stability         | MacAdam Step 3            |
| Light beam angle            | 38°                       |
| Lighting efficiency         | 90%                       |
| Efficacy                    | 100 Lm/W                  |
| Current intensity           | 700 mA                    |
| Dimming                     | Push                      |
| Control through bluetooth   | Please Consult            |
| Driver                      | Included - Connected      |
| Emergency power supply      | Please Consult            |
| Electrical insulation class | □                         |
| Voltage                     | 220 V/240 V               |
| Frequency                   | 50/60 Hz                  |
| Energy efficiency           | A+                        |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h |


## OTHER DATA

|                      |                                                             |
|----------------------|-------------------------------------------------------------|
| Ingress Protection   | IP20                                                        |
| Recess measurements  | 50 × 652 mm.                                                |
| Weight               | 1320 g.                                                     |
| Packaged weight      | 1800 g.                                                     |
| Packaging dimensions | D105 × 830 mm                                               |
| Units per package    | 1                                                           |
| Materials            | Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate |




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

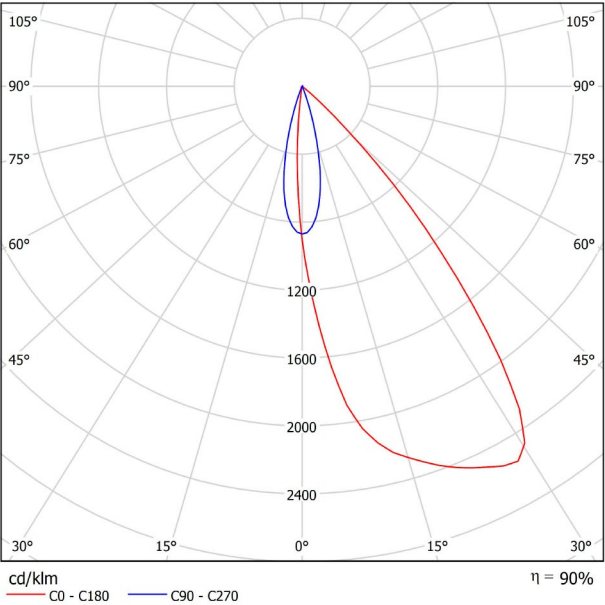


CONICAL DIAGRAM

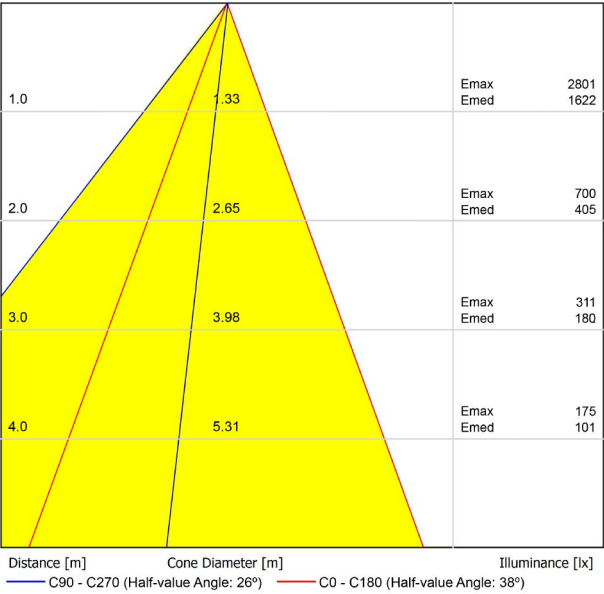



## DIMENSIONS



## AWARDS



|           |                                           |
|-----------|-------------------------------------------|
| Name      | BLACK FOSTER ASYM TRI 15 DIM PUSH 4000K N |
| Reference | A3736022N                                 |
| Color     | Matt black                                |
| RAL       | 9005                                      |
| Category  | CEILING RECESSED                          |

## PRODUCT

BLACK FOSTER ASYM TRI 15 DIM PUSH 4000K N

A3736022N

Matt black

9005

CEILING RECESSED

## LIGHTING INFORMATION

|                             |                           |
|-----------------------------|---------------------------|
| Light source                | LED                       |
| Gross luminous flux         | 3750 Lm                   |
| Power                       | 31,5 W                    |
| Power values of the system  | 31,5 W                    |
| Colour temperature          | 4000 K                    |
| Colour Rendering Index      | CRI>90                    |
| Chromatic stability         | MacAdam Step 3            |
| Light beam angle            | 38°                       |
| Lighting efficiency         | 90%                       |
| Efficacy                    | 119 Lm/W                  |
| Current intensity           | 700 mA                    |
| Dimming                     | Push                      |
| Control through bluetooth   | Please Consult            |
| Driver                      | Included - Connected      |
| Emergency power supply      | Please Consult            |
| Electrical insulation class | □                         |
| Voltage                     | 220 V/240 V               |
| Frequency                   | 50/60 Hz                  |
| Energy efficiency           | A+                        |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h |


## OTHER DATA

|                      |                                                             |
|----------------------|-------------------------------------------------------------|
| Ingress Protection   | IP20                                                        |
| Recess measurements  | 50 × 652 mm.                                                |
| Weight               | 1320 g.                                                     |
| Packaged weight      | 1800 g.                                                     |
| Packaging dimensions | D105 × 830 mm                                               |
| Units per package    | 1                                                           |
| Materials            | Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate |




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

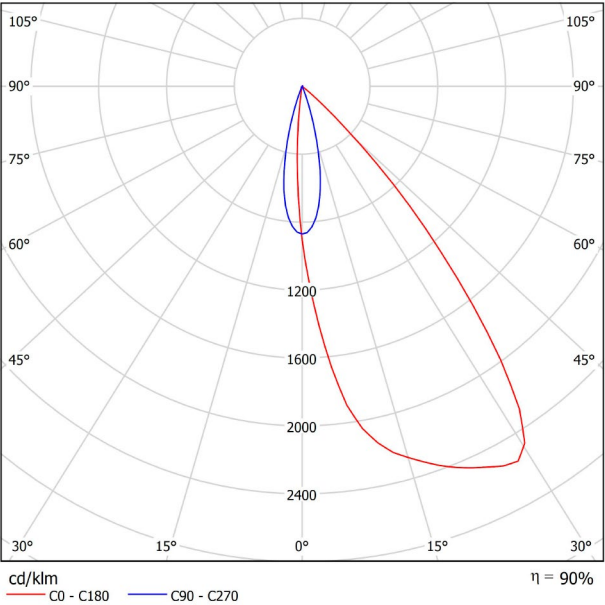


CONICAL DIAGRAM

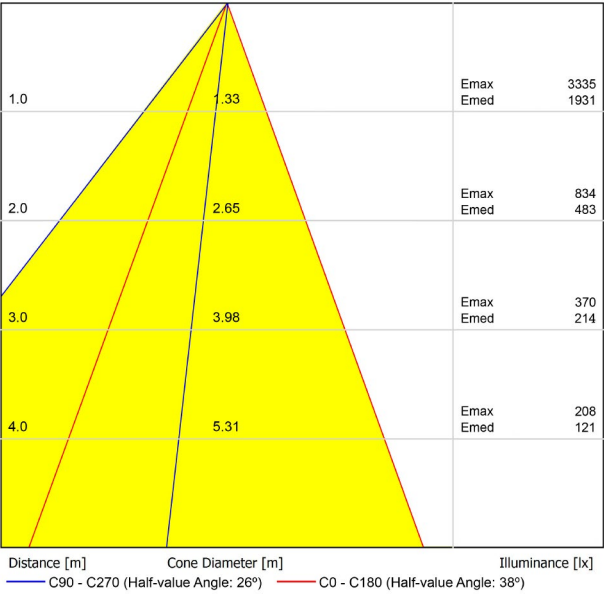



## DIMENSIONS



## AWARDS



|           |                                            |
|-----------|--------------------------------------------|
| Name      | BLACK FOSTER ASYM TRI 15 DIM 1/10V 2700K N |
| Reference | A3736030N                                  |
| Color     | Matt black                                 |
| RAL       | 9005                                       |
| Category  | CEILING RECESSED                           |

## PRODUCT

|                             |                           |
|-----------------------------|---------------------------|
| Light source                | LED                       |
| Gross luminous flux         | 2850 Lm                   |
| Power                       | 31,5 W                    |
| Power values of the system  | 31,5 W                    |
| Colour temperature          | 2700 K                    |
| Colour Rendering Index      | CRI>90                    |
| Chromatic stability         | MacAdam Step 3            |
| Light beam angle            | 38°                       |
| Lighting efficiency         | 90%                       |
| Efficacy                    | 90 Lm/W                   |
| Current intensity           | 700 mA                    |
| Dimming                     | 1-10V                     |
| Control through bluetooth   | Please Consult            |
| Driver                      | Included - Connected      |
| Emergency power supply      | Please Consult            |
| Electrical insulation class | □                         |
| Voltage                     | 220 V/240 V               |
| Frequency                   | 50/60 Hz                  |
| Energy efficiency           | A                         |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h |

## LIGHTING INFORMATION


|                      |                                                             |
|----------------------|-------------------------------------------------------------|
| Ingress Protection   | IP20                                                        |
| Recess measurements  | 50 × 652 mm.                                                |
| Weight               | 1320 g.                                                     |
| Packaged weight      | 1800 g.                                                     |
| Packaging dimensions | D105 × 830 mm                                               |
| Units per package    | 1                                                           |
| Materials            | Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate |

## OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

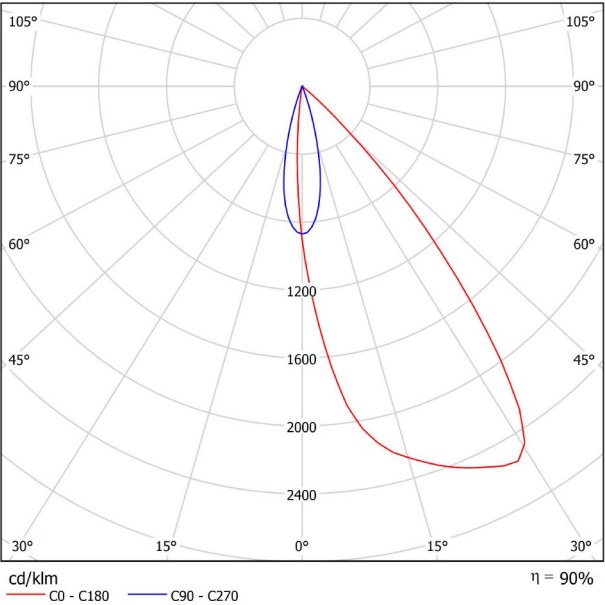


CONICAL DIAGRAM

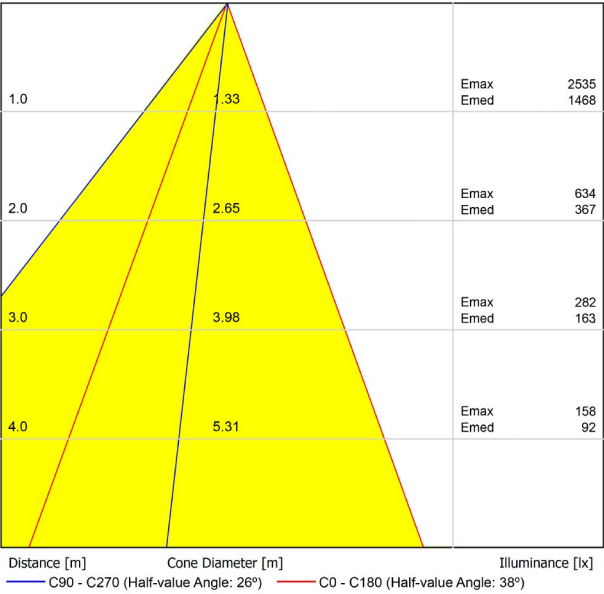



## DIMENSIONS



## AWARDS



|           |                                            |
|-----------|--------------------------------------------|
| Name      | BLACK FOSTER ASYM TRI 15 DIM 1/10V 3000K N |
| Reference | A3736031N                                  |
| Color     | Matt black                                 |
| RAL       | 9005                                       |
| Category  | CEILING RECESSED                           |

## PRODUCT

|                             |                           |
|-----------------------------|---------------------------|
| Light source                | LED                       |
| Gross luminous flux         | 3150 Lm                   |
| Power                       | 31,5 W                    |
| Power values of the system  | 31,5 W                    |
| Colour temperature          | 3000 K                    |
| Colour Rendering Index      | CRI>90                    |
| Chromatic stability         | MacAdam Step 3            |
| Light beam angle            | 38°                       |
| Lighting efficiency         | 90%                       |
| Efficacy                    | 100 Lm/W                  |
| Current intensity           | 700 mA                    |
| Dimming                     | 1-10V                     |
| Control through bluetooth   | Please Consult            |
| Driver                      | Included - Connected      |
| Emergency power supply      | Please Consult            |
| Electrical insulation class | □                         |
| Voltage                     | 220 V/240 V               |
| Frequency                   | 50/60 Hz                  |
| Energy efficiency           | A+                        |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h |

## LIGHTING INFORMATION


|                      |                                                             |
|----------------------|-------------------------------------------------------------|
| Ingress Protection   | IP20                                                        |
| Recess measurements  | 50 × 652 mm.                                                |
| Weight               | 1320 g.                                                     |
| Packaged weight      | 1800 g.                                                     |
| Packaging dimensions | D105 × 830 mm                                               |
| Units per package    | 1                                                           |
| Materials            | Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate |

## OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

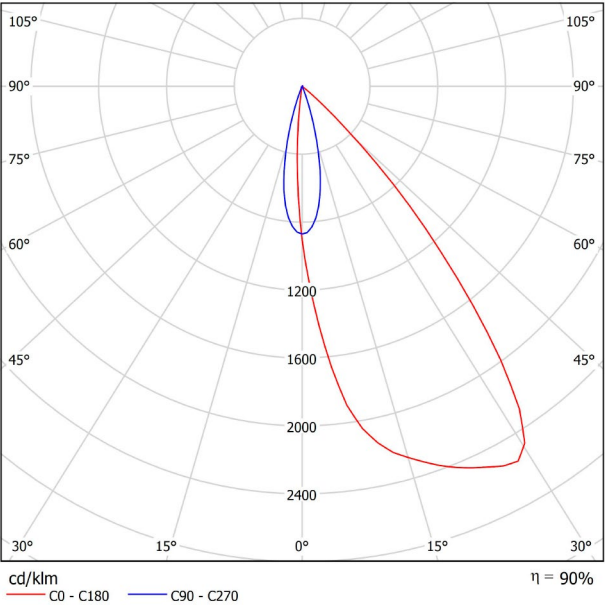


CONICAL DIAGRAM

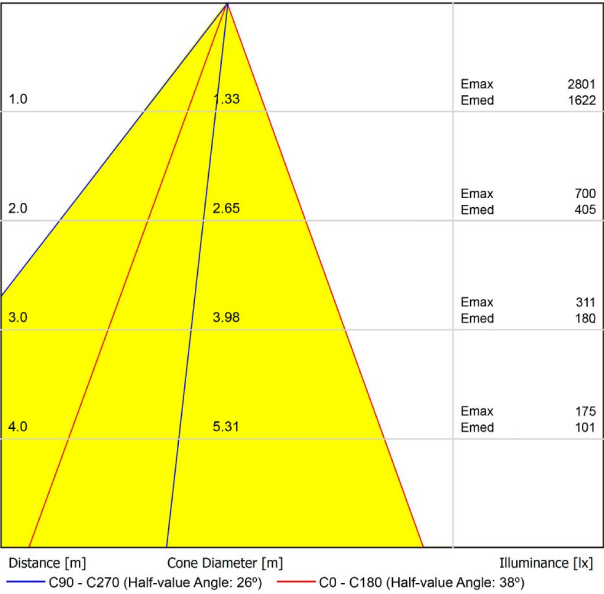



## DIMENSIONS



## AWARDS



|           |                                            |
|-----------|--------------------------------------------|
| Name      | BLACK FOSTER ASYM TRI 15 DIM 1/10V 4000K N |
| Reference | A3736032N                                  |
| Color     | Matt black                                 |
| RAL       | 9005                                       |
| Category  | CEILING RECESSED                           |

## PRODUCT

## LIGHTING INFORMATION

|                             |                           |
|-----------------------------|---------------------------|
| Light source                | LED                       |
| Gross luminous flux         | 3750 Lm                   |
| Power                       | 31,5 W                    |
| Power values of the system  | 31,5 W                    |
| Colour temperature          | 4000 K                    |
| Colour Rendering Index      | CRI>90                    |
| Chromatic stability         | MacAdam Step 3            |
| Light beam angle            | 38°                       |
| Lighting efficiency         | 90%                       |
| Efficacy                    | 119 Lm/W                  |
| Current intensity           | 700 mA                    |
| Dimming                     | 1-10V                     |
| Control through bluetooth   | Please Consult            |
| Driver                      | Included - Connected      |
| Emergency power supply      | Please Consult            |
| Electrical insulation class | □                         |
| Voltage                     | 220 V/240 V               |
| Frequency                   | 50/60 Hz                  |
| Energy efficiency           | A+                        |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h |


## OTHER DATA

|                      |                                                             |
|----------------------|-------------------------------------------------------------|
| Ingress Protection   | IP20                                                        |
| Recess measurements  | 50 × 652 mm.                                                |
| Weight               | 1320 g.                                                     |
| Packaged weight      | 1800 g.                                                     |
| Packaging dimensions | D105 × 830 mm                                               |
| Units per package    | 1                                                           |
| Materials            | Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate |




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

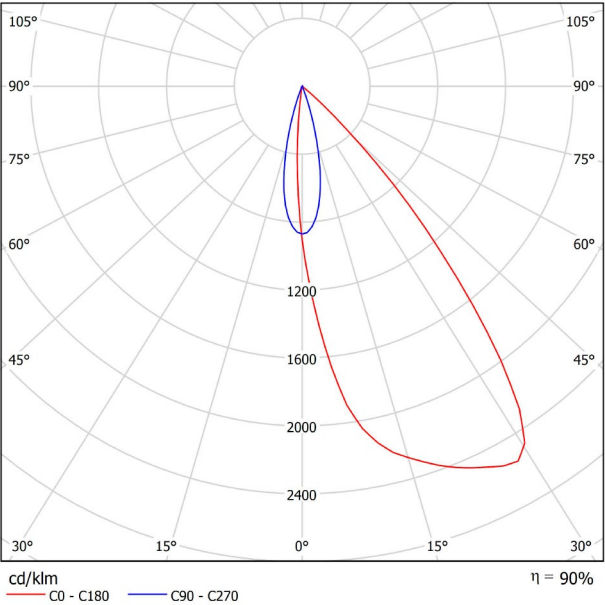


CONICAL DIAGRAM

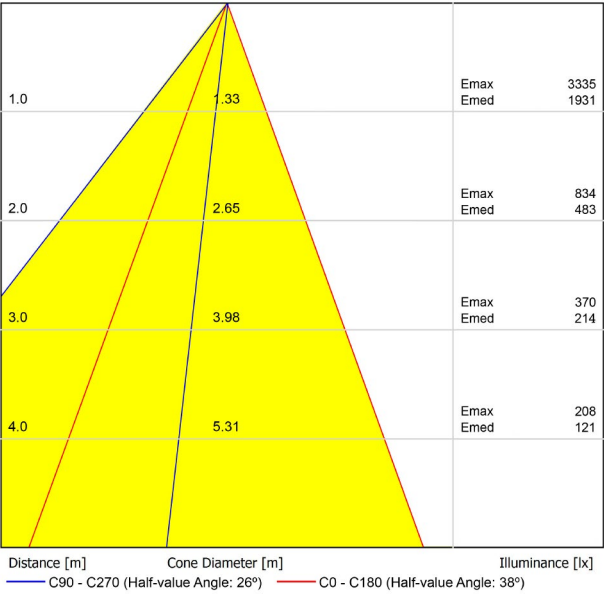



## DIMENSIONS

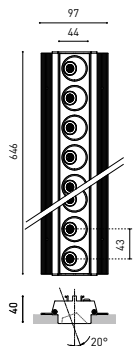

## AWARDS



|           |                                           |
|-----------|-------------------------------------------|
| Name      | BLACK FOSTER ASYM TRI 15 DIM DALI 2700K N |
| Reference | A3736040N                                 |
| Color     | Matt black                                |
| RAL       | 9005                                      |
| Category  | CEILING RECESSED                          |

## PRODUCT

|                             |                           |
|-----------------------------|---------------------------|
| Light source                | LED                       |
| Gross luminous flux         | 2850 Lm                   |
| Power                       | 31,5 W                    |
| Power values of the system  | 31,5 W                    |
| Colour temperature          | 2700 K                    |
| Colour Rendering Index      | CRI>90                    |
| Chromatic stability         | MacAdam Step 3            |
| Light beam angle            | 38°                       |
| Lighting efficiency         | 90%                       |
| Efficacy                    | 90 Lm/W                   |
| Current intensity           | 700 mA                    |
| Dimming                     | DALI                      |
| Control through bluetooth   | Please Consult            |
| Driver                      | Included - Connected      |
| Emergency power supply      | Please Consult            |
| Electrical insulation class | □                         |
| Voltage                     | 220 V/240 V               |
| Frequency                   | 50/60 Hz                  |
| Energy efficiency           | A                         |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h |

## LIGHTING INFORMATION


|                      |                                                             |
|----------------------|-------------------------------------------------------------|
| Ingress Protection   | IP20                                                        |
| Recess measurements  | 50 × 652 mm.                                                |
| Weight               | 1320 g.                                                     |
| Packaged weight      | 1800 g.                                                     |
| Packaging dimensions | D105 × 830 mm                                               |
| Units per package    | 1                                                           |
| Materials            | Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate |

## OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

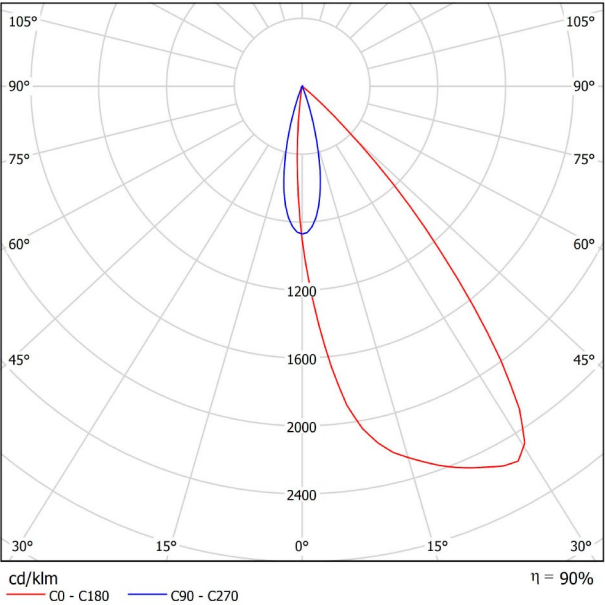


CONICAL DIAGRAM

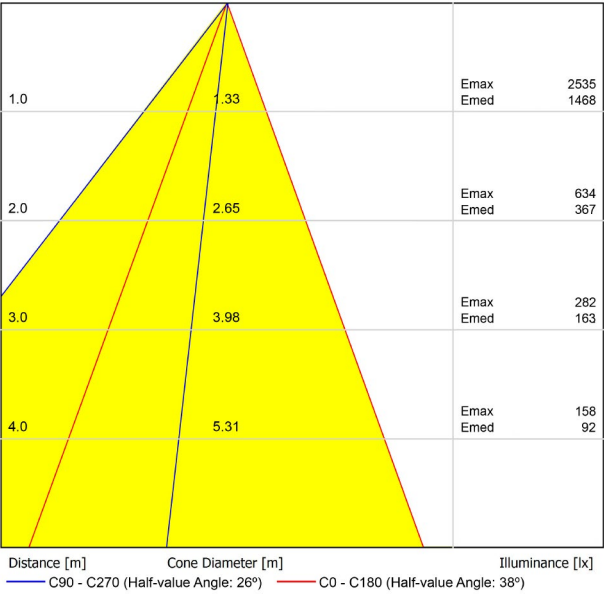



## DIMENSIONS



## AWARDS



|           |                                           |
|-----------|-------------------------------------------|
| Name      | BLACK FOSTER ASYM TRI 15 DIM DALI 3000K N |
| Reference | A3736041N                                 |
| Color     | Matt black                                |
| RAL       | 9005                                      |
| Category  | CEILING RECESSED                          |

## PRODUCT

|                             |                           |
|-----------------------------|---------------------------|
| Light source                | LED                       |
| Gross luminous flux         | 3150 Lm                   |
| Power                       | 31,5 W                    |
| Power values of the system  | 31,5 W                    |
| Colour temperature          | 3000 K                    |
| Colour Rendering Index      | CRI>90                    |
| Chromatic stability         | MacAdam Step 3            |
| Light beam angle            | 38°                       |
| Lighting efficiency         | 90%                       |
| Efficacy                    | 100 Lm/W                  |
| Current intensity           | 700 mA                    |
| Dimming                     | DALI                      |
| Control through bluetooth   | Please Consult            |
| Driver                      | Included - Connected      |
| Emergency power supply      | Please Consult            |
| Electrical insulation class | □                         |
| Voltage                     | 220 V/240 V               |
| Frequency                   | 50/60 Hz                  |
| Energy efficiency           | A+                        |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h |

## LIGHTING INFORMATION


|                      |                                                             |
|----------------------|-------------------------------------------------------------|
| Ingress Protection   | IP20                                                        |
| Recess measurements  | 50 × 652 mm.                                                |
| Weight               | 1320 g.                                                     |
| Packaged weight      | 1800 g.                                                     |
| Packaging dimensions | D105 × 830 mm                                               |
| Units per package    | 1                                                           |
| Materials            | Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate |

## OTHER DATA




Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

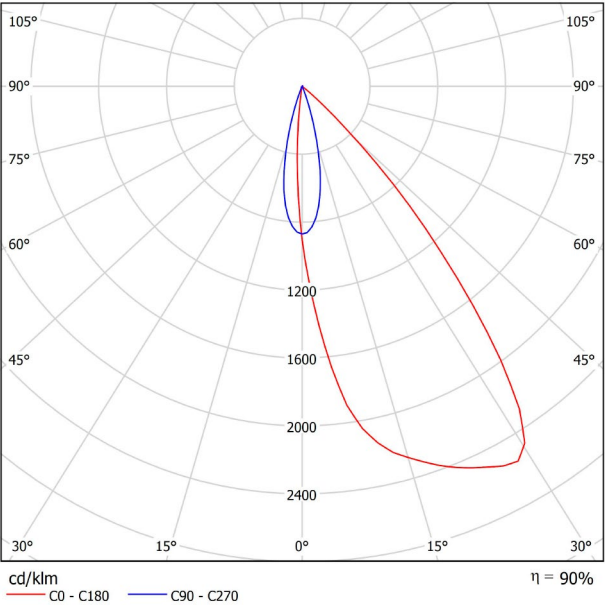


CONICAL DIAGRAM

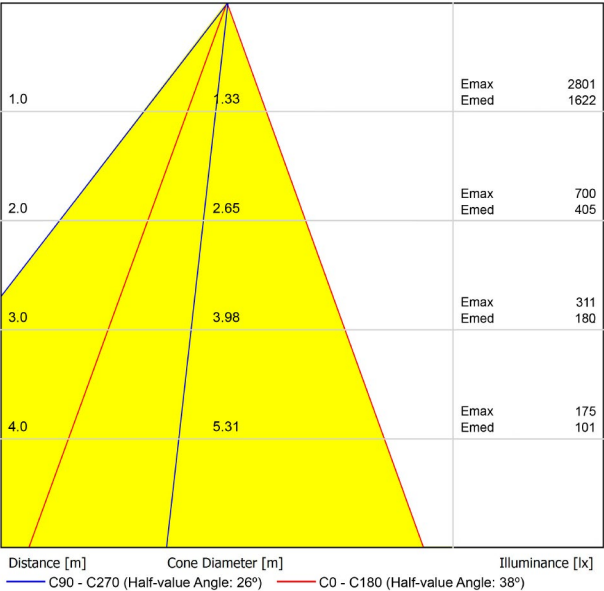



## DIMENSIONS



## AWARDS



|           |                                           |
|-----------|-------------------------------------------|
| Name      | BLACK FOSTER ASYM TRI 15 DIM DALI 4000K N |
| Reference | A3736042N                                 |
| Color     | Matt black                                |
| RAL       | 9005                                      |
| Category  | CEILING RECESSED                          |

## PRODUCT

|                             |                           |
|-----------------------------|---------------------------|
| Light source                | LED                       |
| Gross luminous flux         | 3750 Lm                   |
| Power                       | 31,5 W                    |
| Power values of the system  | 31,5 W                    |
| Colour temperature          | 4000 K                    |
| Colour Rendering Index      | CRI>90                    |
| Chromatic stability         | MacAdam Step 3            |
| Light beam angle            | 38°                       |
| Lighting efficiency         | 90%                       |
| Efficacy                    | 119 Lm/W                  |
| Current intensity           | 700 mA                    |
| Dimming                     | DALI                      |
| Control through bluetooth   | Please Consult            |
| Driver                      | Included - Connected      |
| Emergency power supply      | Please Consult            |
| Electrical insulation class | □                         |
| Voltage                     | 220 V/240 V               |
| Frequency                   | 50/60 Hz                  |
| Energy efficiency           | A+                        |
| LED lifespan                | L80B10 (Tc=85°C) >60.000h |

## LIGHTING INFORMATION


|                      |                                                             |
|----------------------|-------------------------------------------------------------|
| Ingress Protection   | IP20                                                        |
| Recess measurements  | 50 × 652 mm.                                                |
| Weight               | 1320 g.                                                     |
| Packaged weight      | 1800 g.                                                     |
| Packaging dimensions | D105 × 830 mm                                               |
| Units per package    | 1                                                           |
| Materials            | Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate |

## OTHER DATA



Black Foster is the product that transfers the claimed effect "The Invisible Black" to a recessed-isolated lineal luminary; also available in trimless version. If we take a closer view to the recessed model, its bezel is so thin than when lighted up, it is unperceived; offering an aesthetic of "visual trimless". Black Foster stands out for its refinement, its visual comfort and for almost completely hide the source of light from the human eye range.

POLAR DIAGRAM

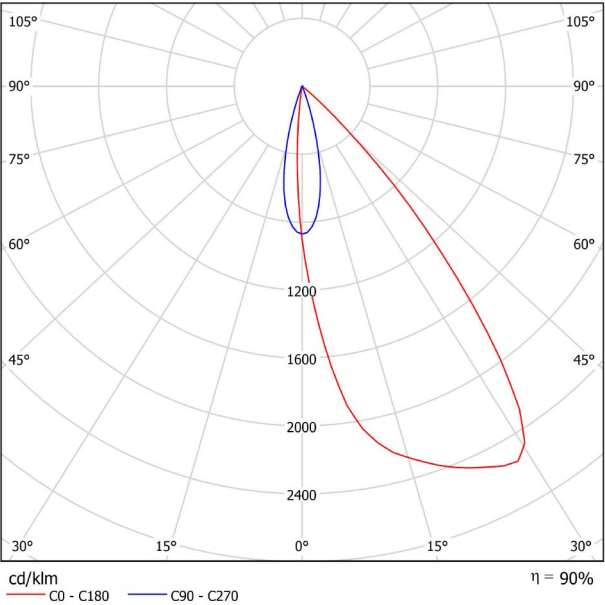

CONICAL DIAGRAM

