




DIMENSIONS



ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	FIT 35 RECESSED 19° 2700K NT
Reference	A3452110NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	590 Lm
Power	5,5 W
Power values of the system	6,18 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	19°
Lighting efficiency	82%
Efficacy	107 Lm/W
Current intensity	500 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	240 g.
Packaged weight	315 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate




Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

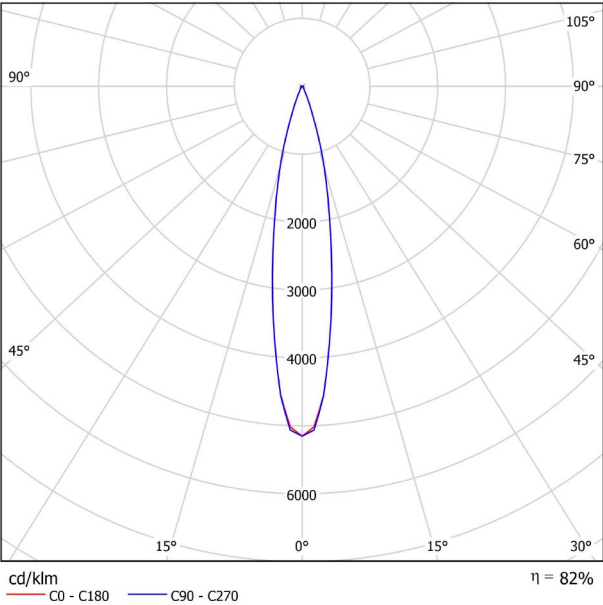

CONICAL DIAGRAM

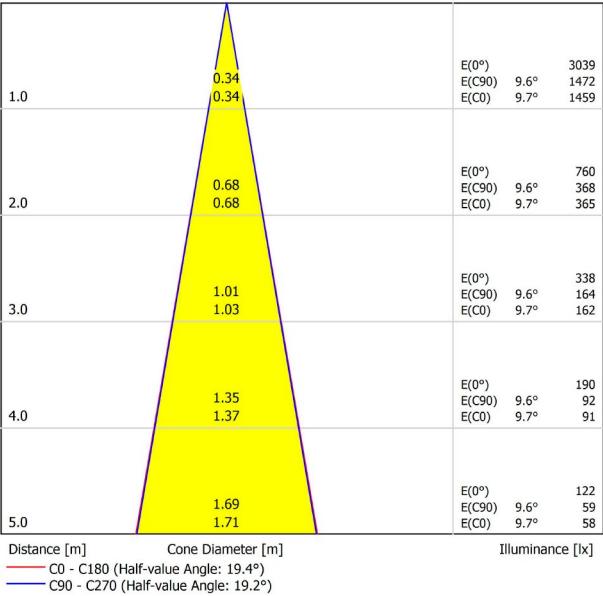




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	FIT 35 RECESSED 19° 2700K WT
Reference	A3452110WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	590 Lm
Power	5,5 W
Power values of the system	6,18 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	19°
Lighting efficiency	82%
Efficacy	107 Lm/W
Current intensity	500 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	240 g.
Packaged weight	315 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

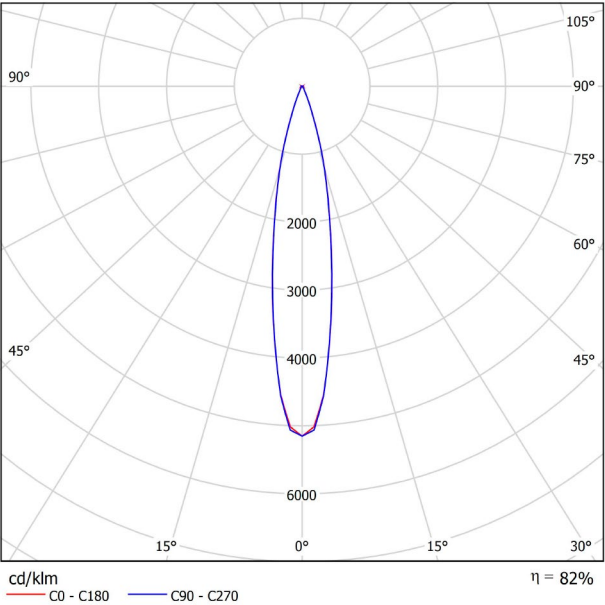

CONICAL DIAGRAM

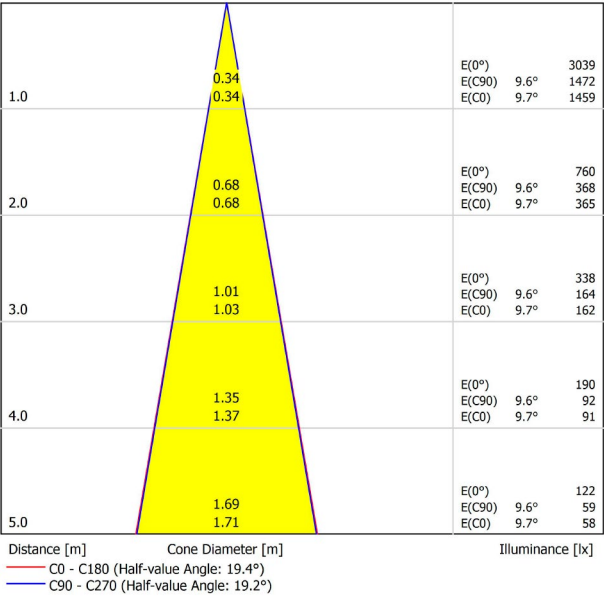




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	FIT 35 RECESSED 19° 3000K NT
Reference	A3452111NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	5,5 W
Power values of the system	6,18 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	19°
Lighting efficiency	82%
Efficacy	115 Lm/W
Current intensity	500 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	240 g.
Packaged weight	315 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

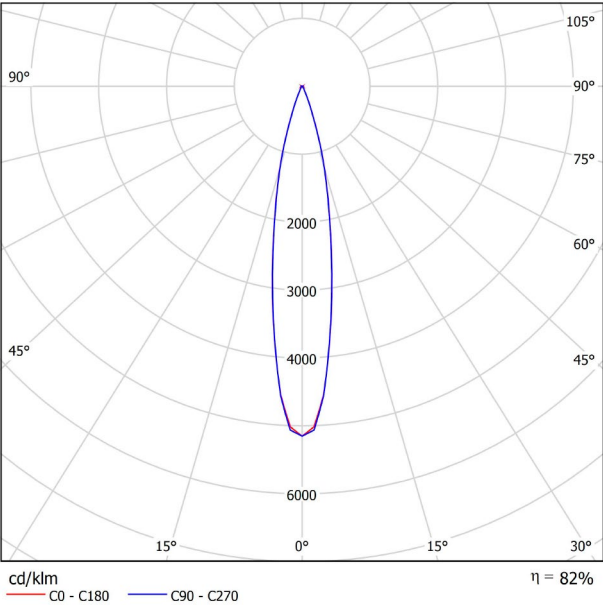

CONICAL DIAGRAM

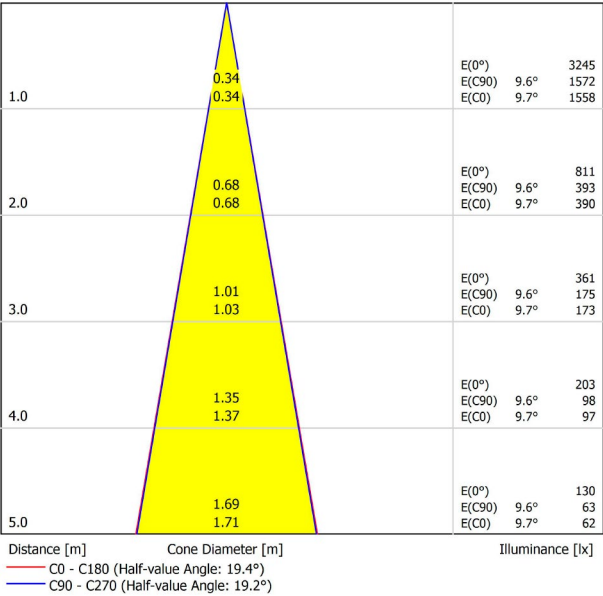



PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED 19° 3000K WT
Reference	A3452111WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	5,5 W
Power values of the system	6,18 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	19°
Lighting efficiency	82%
Efficacy	115 Lm/W
Current intensity	500 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	240 g.
Packaged weight	315 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

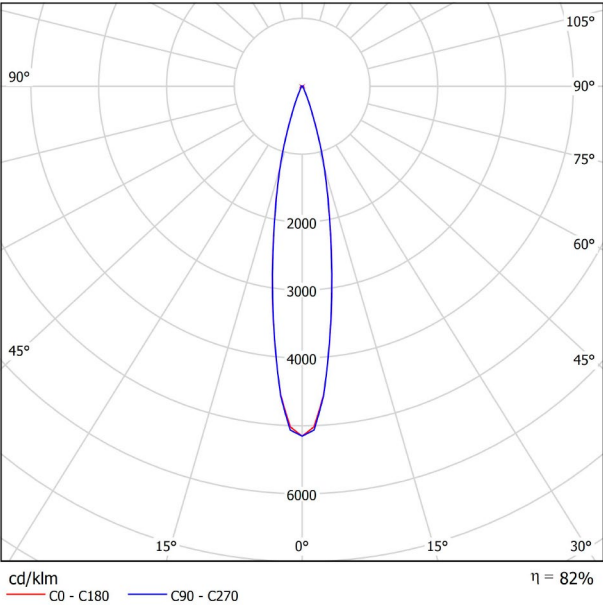

CONICAL DIAGRAM

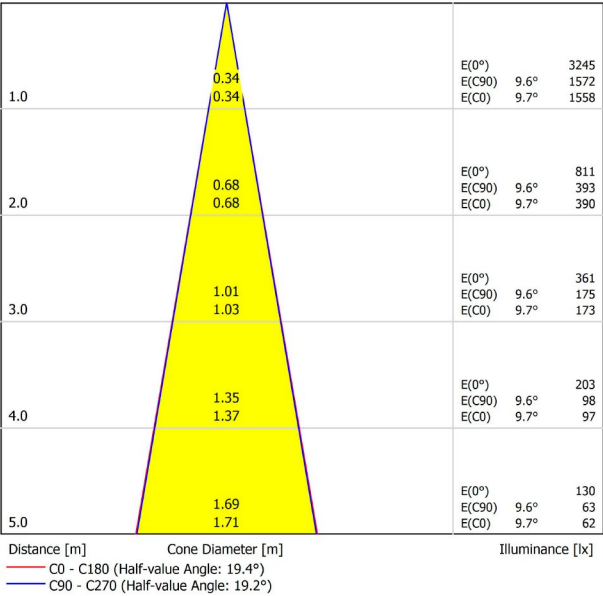



PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED 29° 2700K NT
Reference	A3452120NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	590 Lm
Power	5,5 W
Power values of the system	6,18 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	29°
Lighting efficiency	80%
Efficacy	107 Lm/W
Current intensity	500 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	240 g.
Packaged weight	315 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

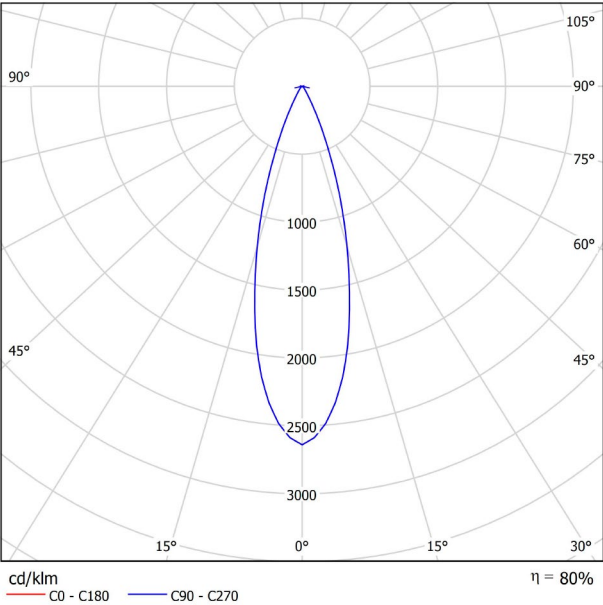

CONICAL DIAGRAM

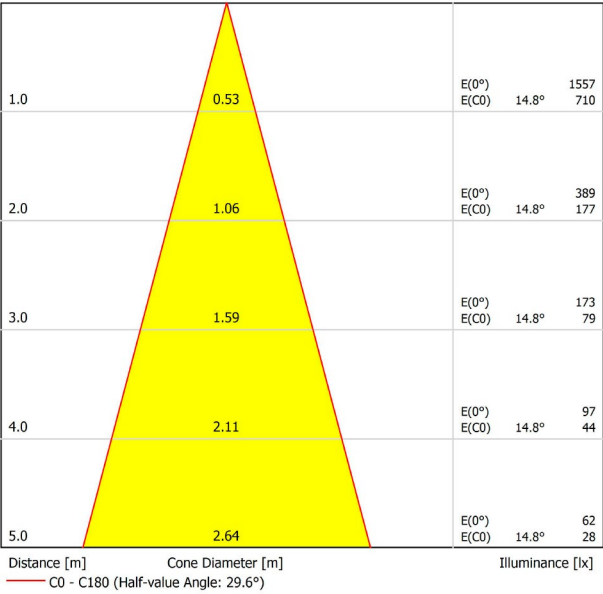



PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED 29° 2700K WT
Reference	A3452120WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	590 Lm
Power	5,5 W
Power values of the system	6,18 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	29°
Lighting efficiency	80%
Efficacy	107 Lm/W
Current intensity	500 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	240 g.
Packaged weight	315 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

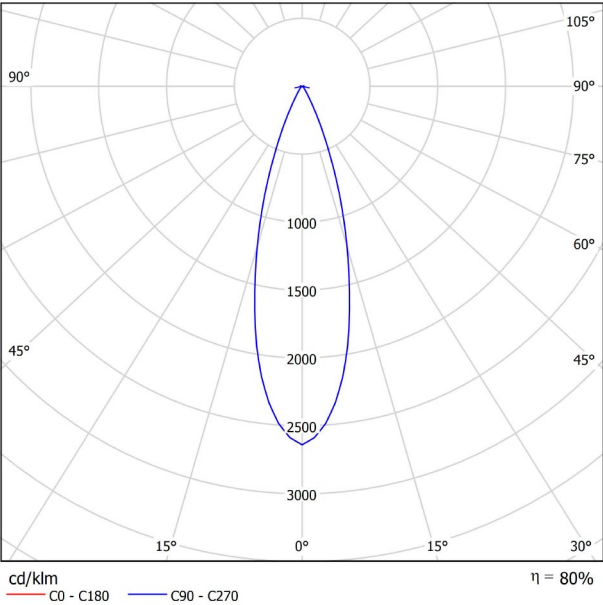

CONICAL DIAGRAM

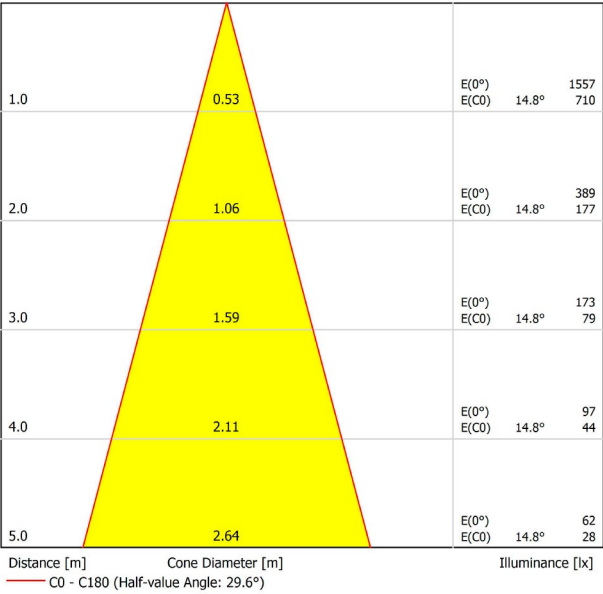



PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED 29° 3000K NT
Reference	A3452121NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	5,5 W
Power values of the system	6,18 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	29°
Lighting efficiency	80%
Efficacy	115 Lm/W
Current intensity	500 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	240 g.
Packaged weight	315 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

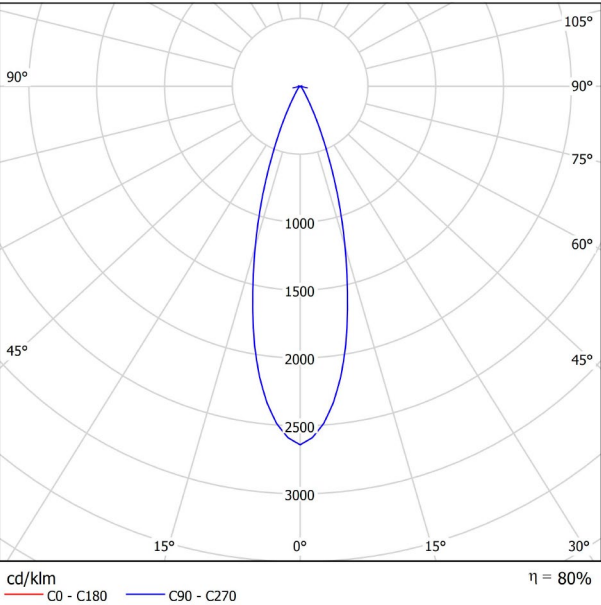

CONICAL DIAGRAM

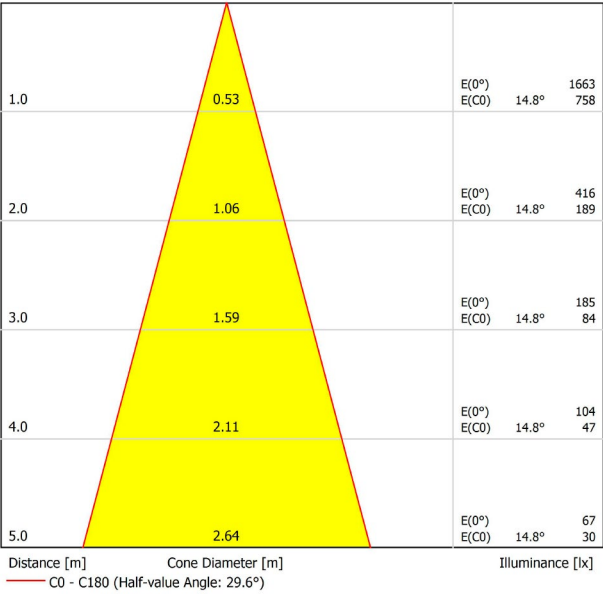




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED 29° 3000K WT
Reference	A3452121WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	5,5 W
Power values of the system	6,18 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	29°
Lighting efficiency	80%
Efficacy	115 Lm/W
Current intensity	500 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	240 g.
Packaged weight	315 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

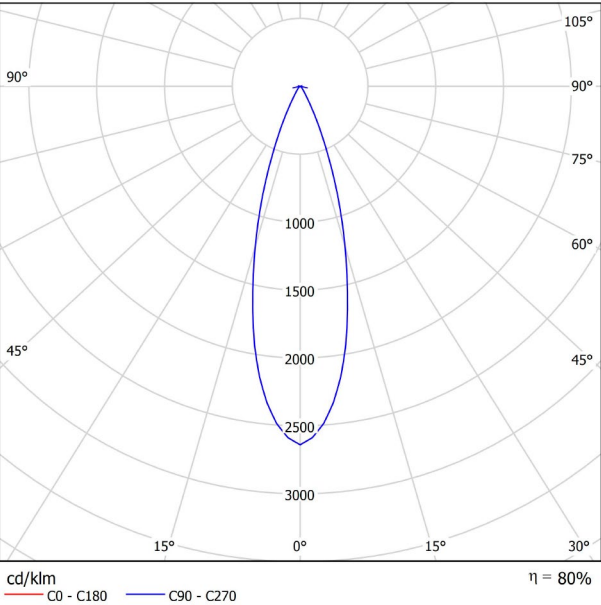

CONICAL DIAGRAM

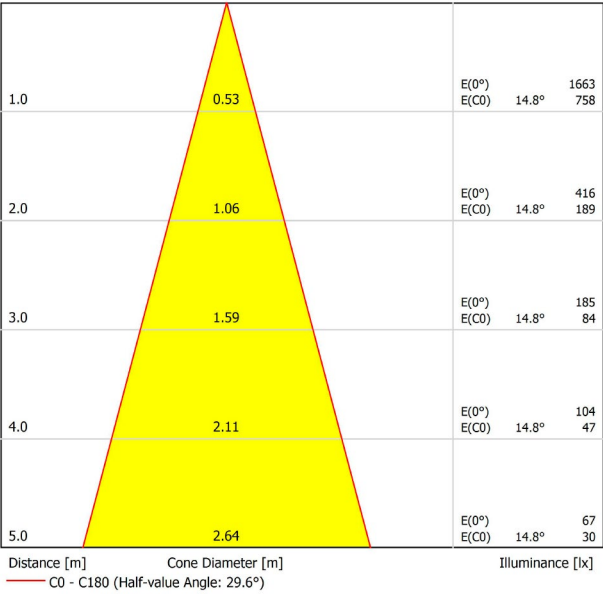




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED 38° 2700K NT
Reference	A3452130NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	590 Lm
Power	5,5 W
Power values of the system	6,18 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	38°
Lighting efficiency	80%
Efficacy	107 Lm/W
Current intensity	500 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	240 g.
Packaged weight	315 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

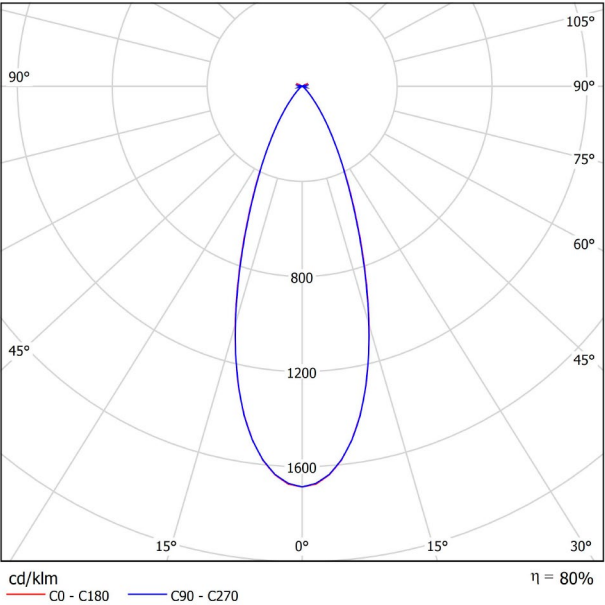

CONICAL DIAGRAM

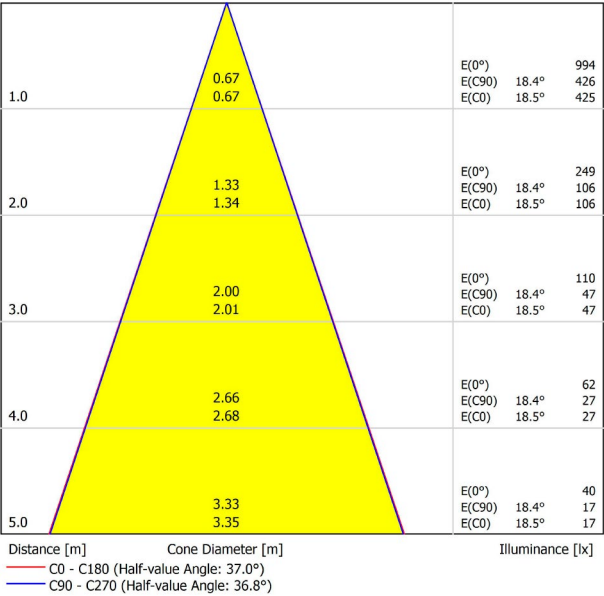




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	FIT 35 RECESSED 38° 2700K WT
Reference	A3452130WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	590 Lm
Power	5,5 W
Power values of the system	6,18 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	38°
Lighting efficiency	80%
Efficacy	107 Lm/W
Current intensity	500 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	240 g.
Packaged weight	315 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

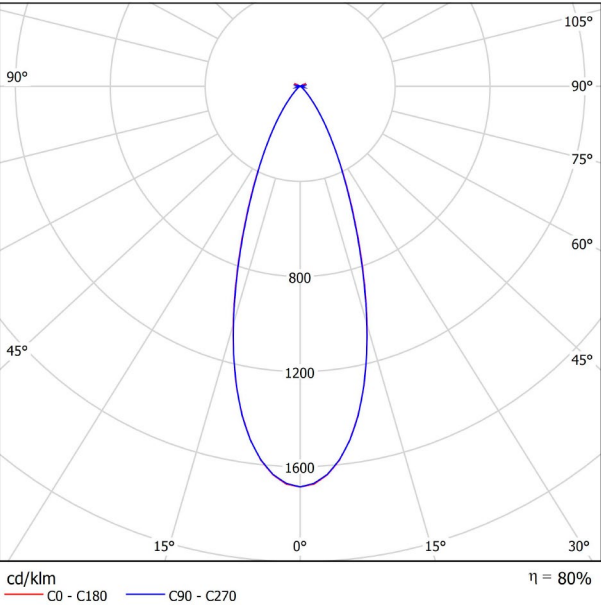

CONICAL DIAGRAM

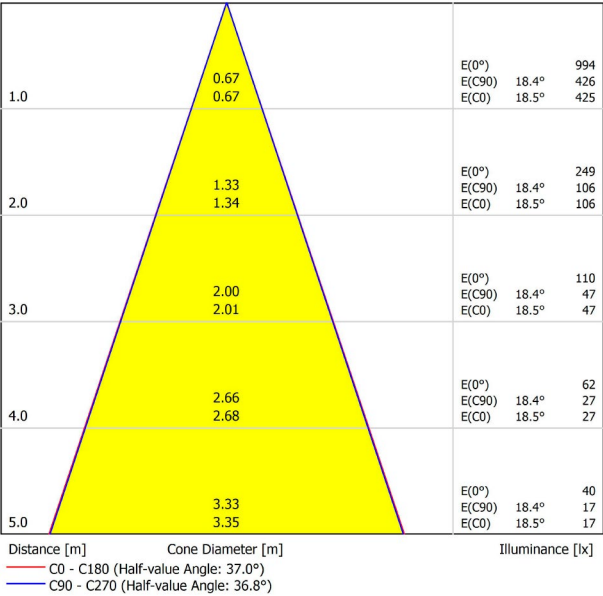



PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED 38° 3000K NT
Reference	A3452131NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	5,5 W
Power values of the system	6,18 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	38°
Lighting efficiency	80%
Efficacy	115 Lm/W
Current intensity	500 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	240 g.
Packaged weight	315 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

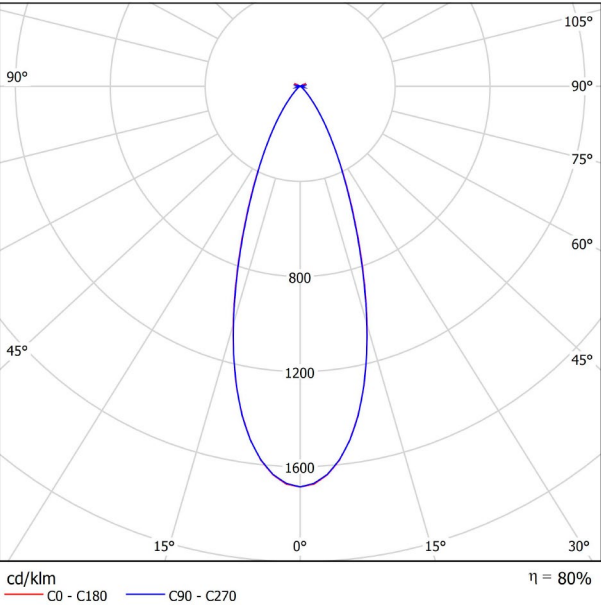

CONICAL DIAGRAM

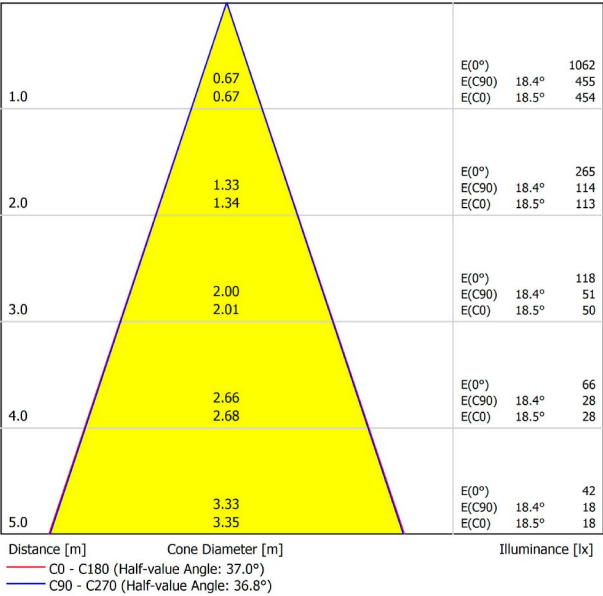




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	FIT 35 RECESSED 38° 3000K WT
Reference	A3452131WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	5,5 W
Power values of the system	6,18 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	38°
Lighting efficiency	80%
Efficacy	115 Lm/W
Current intensity	500 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	240 g.
Packaged weight	315 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

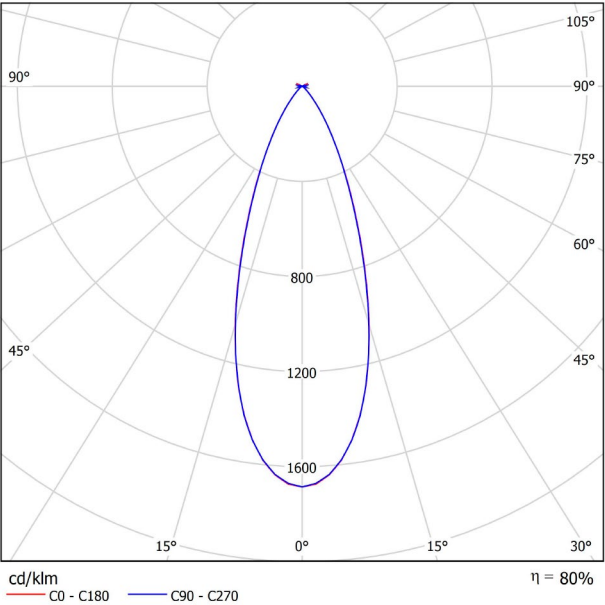

CONICAL DIAGRAM

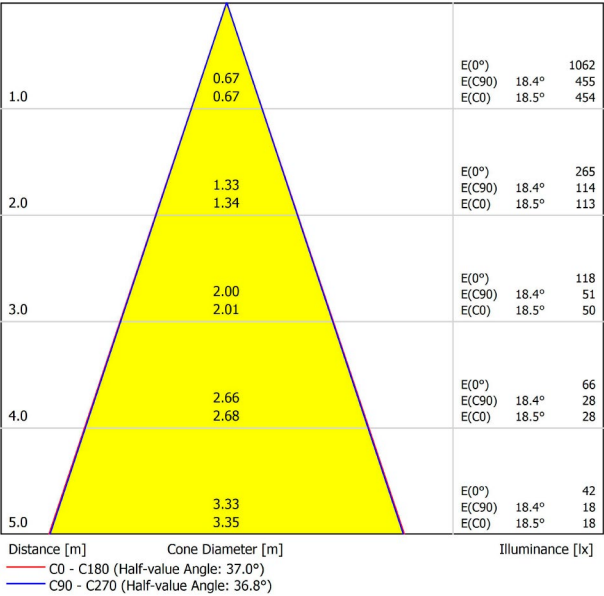




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED DIM DALI 19° 2700K NT
Reference	A3452210NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	590 Lm
Power	5,5 W
Power values of the system	6,71 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	19°
Lighting efficiency	82%
Efficacy	107 Lm/W
Current intensity	500 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	290 g.
Packaged weight	365 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

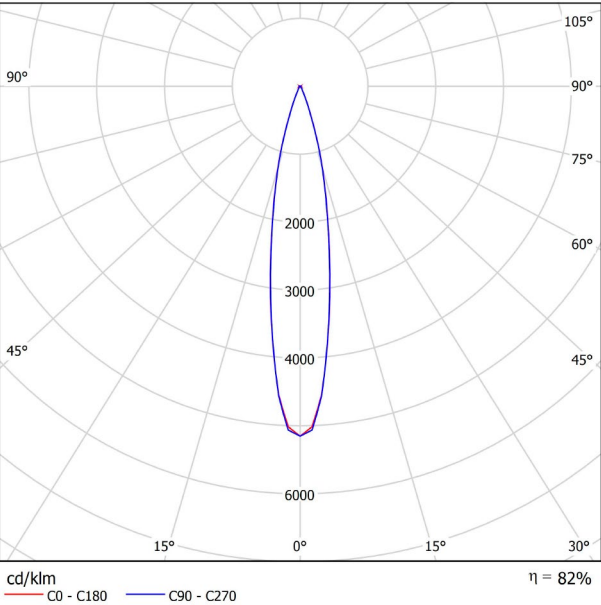

CONICAL DIAGRAM

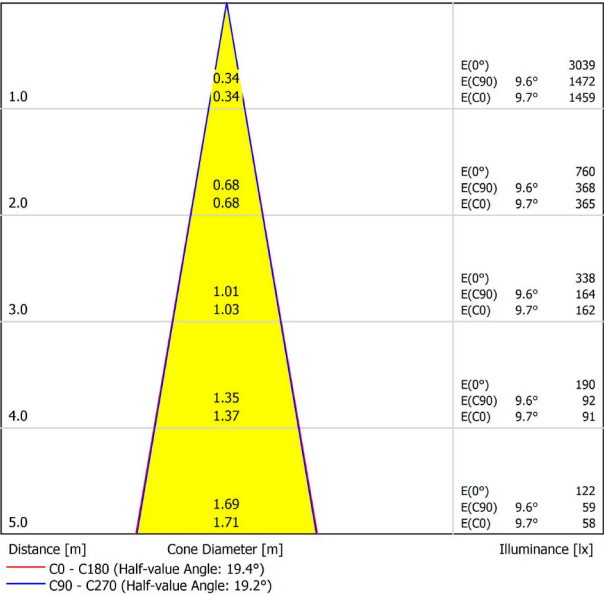



PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED DIM DALI 19° 2700K WT
Reference	A3452210WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	590 Lm
Power	5,5 W
Power values of the system	6,71 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	19°
Lighting efficiency	82%
Efficacy	107 Lm/W
Current intensity	500 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	290 g.
Packaged weight	365 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

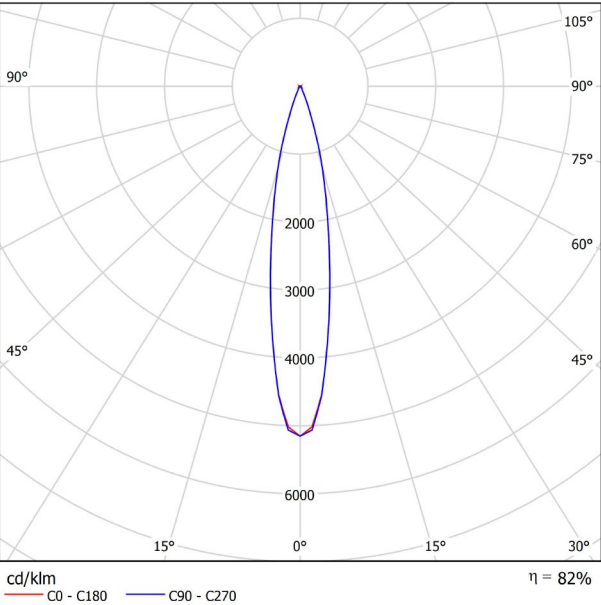

CONICAL DIAGRAM

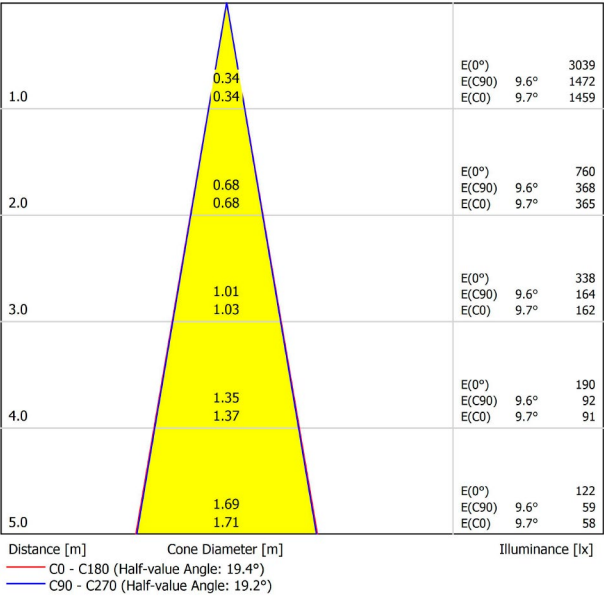




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED DIM DALI 19° 3000K NT
Reference	A3452211NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	5,5 W
Power values of the system	6,71 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	19°
Lighting efficiency	82%
Efficacy	115 Lm/W
Current intensity	500 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	290 g.
Packaged weight	365 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

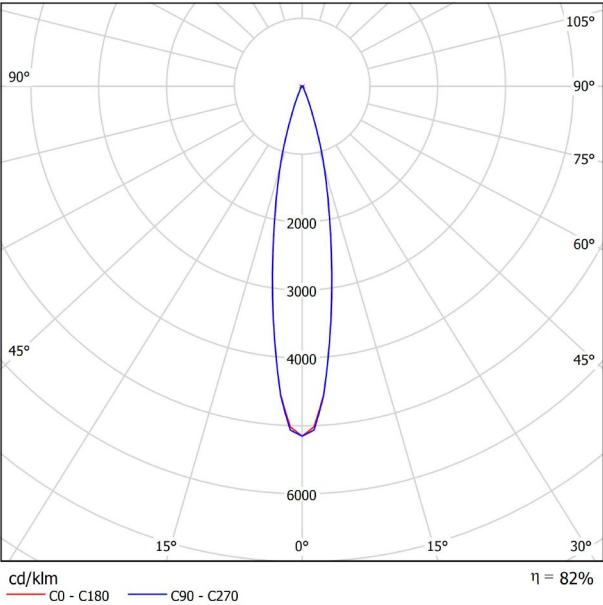

CONICAL DIAGRAM

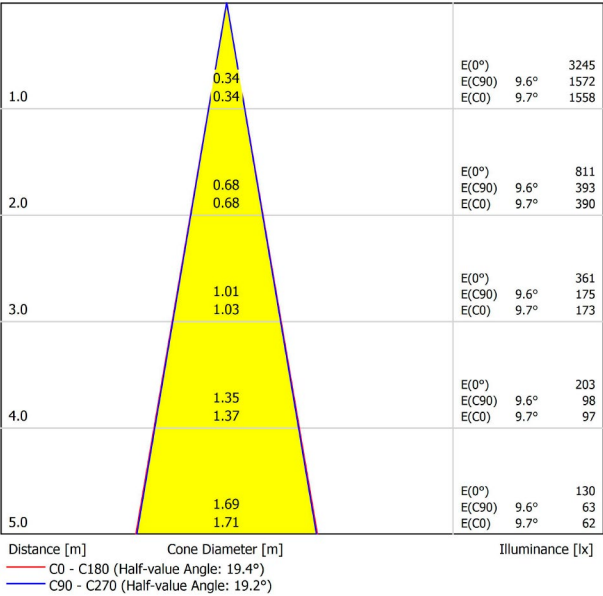




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED DIM DALI 19° 3000K WT
Reference	A3452211WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	5,5 W
Power values of the system	6,71 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	19°
Lighting efficiency	82%
Efficacy	115 Lm/W
Current intensity	500 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	290 g.
Packaged weight	365 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

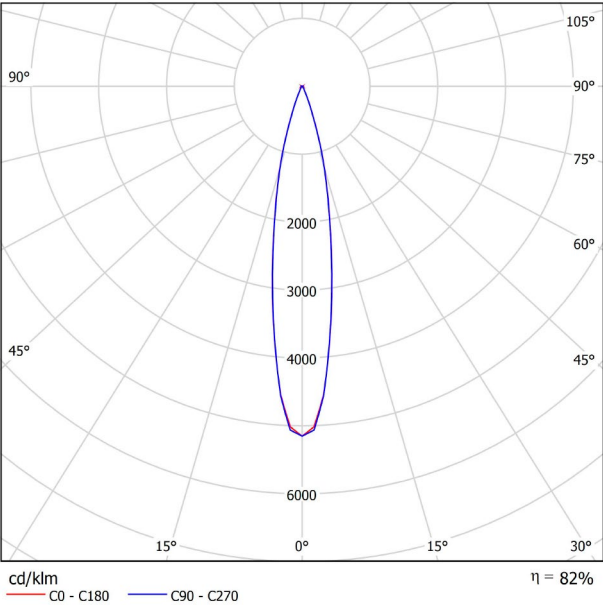

CONICAL DIAGRAM

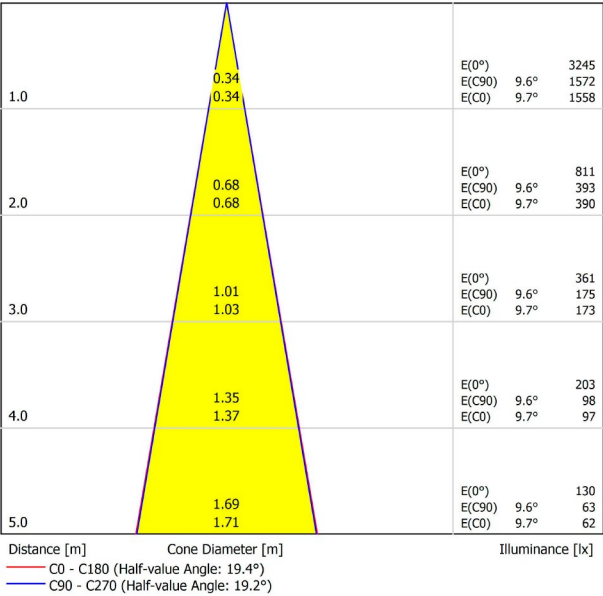




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED DIM DALI 29° 2700K NT
Reference	A3452220NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	590 Lm
Power	5,5 W
Power values of the system	6,71 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	29°
Lighting efficiency	80%
Efficacy	107 Lm/W
Current intensity	500 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	290 g.
Packaged weight	365 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

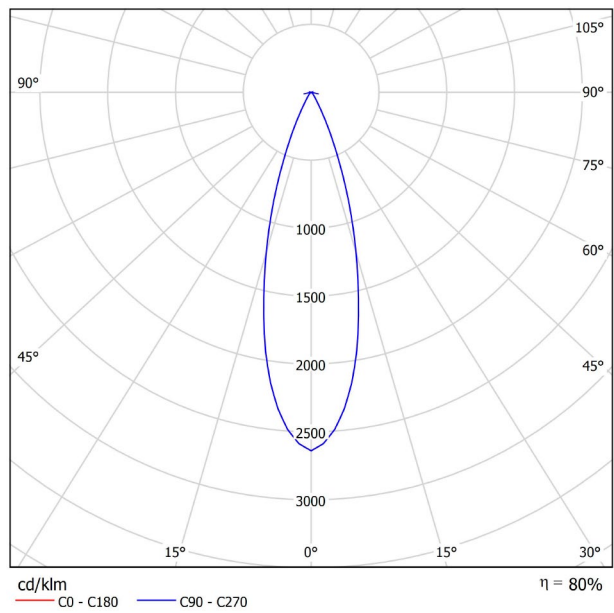

CONICAL DIAGRAM

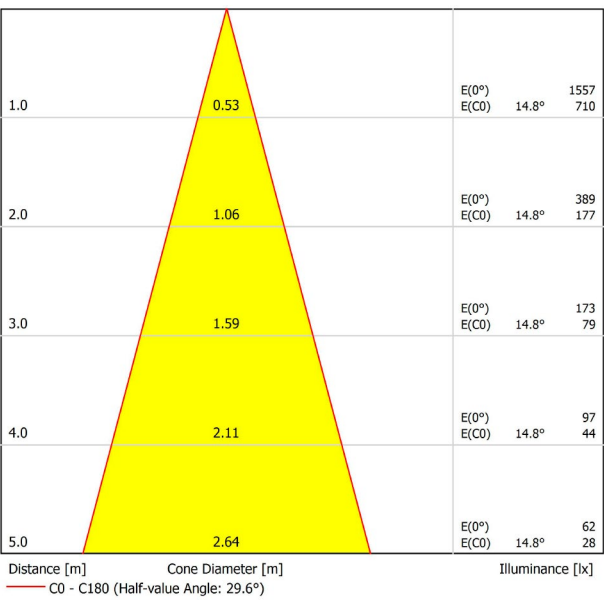




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED DIM DALI 29° 2700K WT
Reference	A3452220WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	590 Lm
Power	5,5 W
Power values of the system	6,71 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	29°
Lighting efficiency	80%
Efficacy	107 Lm/W
Current intensity	500 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	290 g.
Packaged weight	365 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

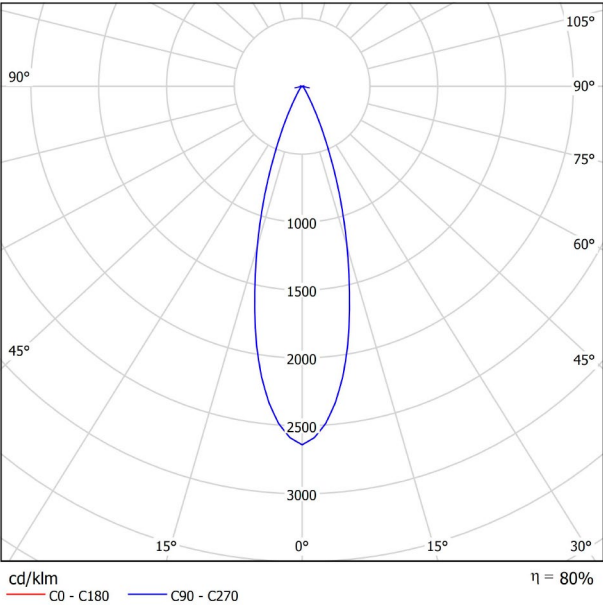

CONICAL DIAGRAM

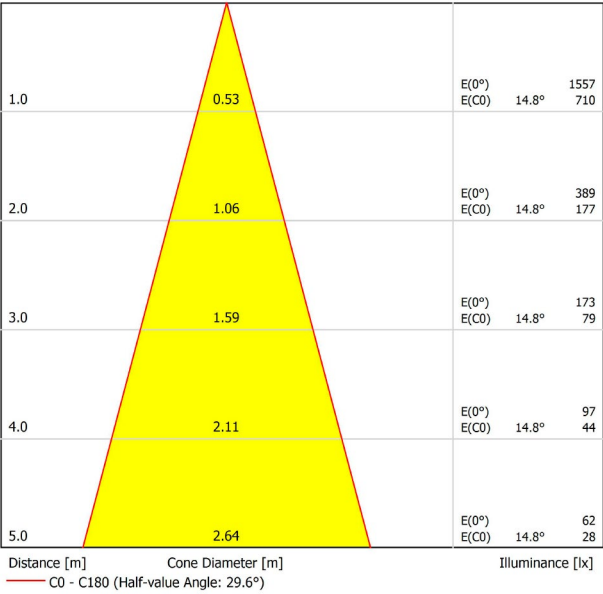




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED DIM DALI 29° 3000K NT
Reference	A3452221NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	5,5 W
Power values of the system	6,71 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	29°
Lighting efficiency	80%
Efficacy	115 Lm/W
Current intensity	500 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	290 g.
Packaged weight	365 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

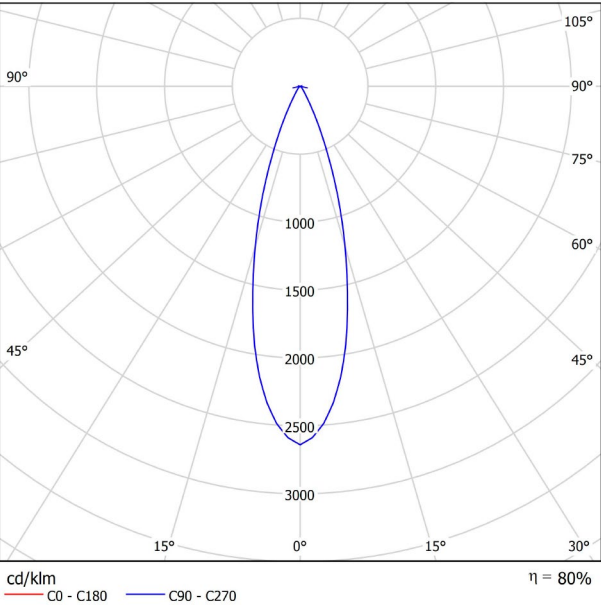

CONICAL DIAGRAM

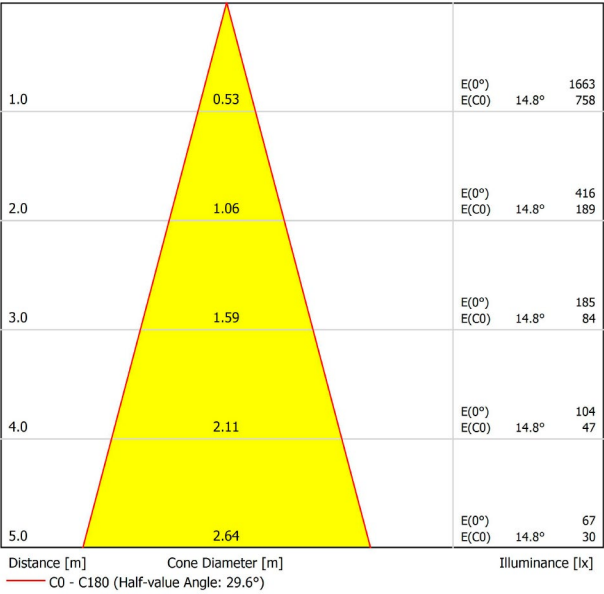




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED DIM DALI 29° 3000K WT
Reference	A3452221WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	5,5 W
Power values of the system	6,71 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	29°
Lighting efficiency	80%
Efficacy	115 Lm/W
Current intensity	500 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	290 g.
Packaged weight	365 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

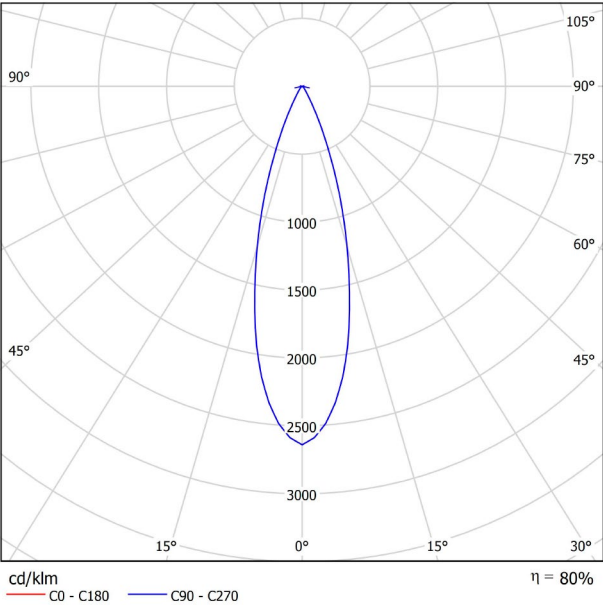

CONICAL DIAGRAM

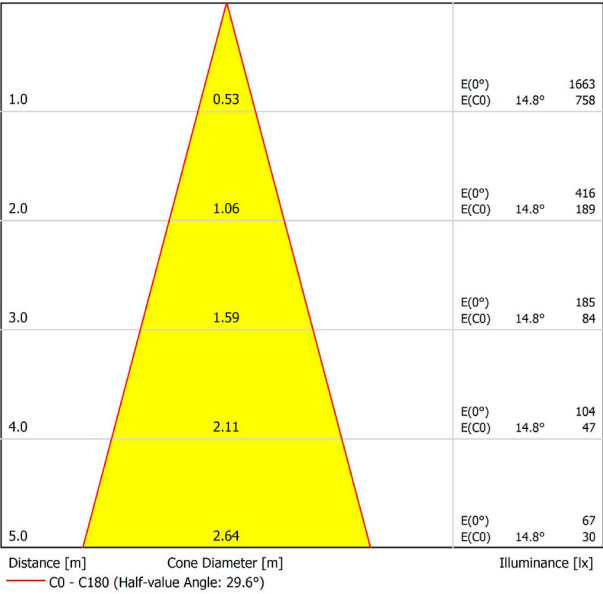




	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories
	NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED DIM DALI 38° 2700K NT
Reference	A3452230NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	590 Lm
Power	5,5 W
Power values of the system	6,71 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	38°
Lighting efficiency	80%
Efficacy	107 Lm/W
Current intensity	500 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	290 g.
Packaged weight	365 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

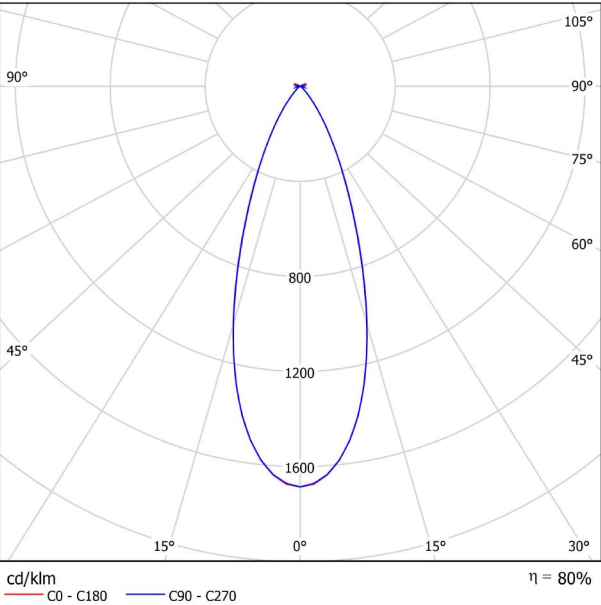

CONICAL DIAGRAM

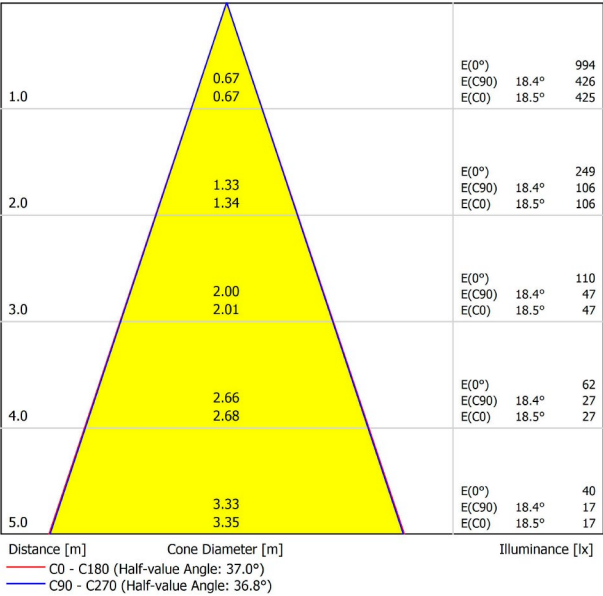




	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories
	NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED DIM DALI 38° 2700K WT
Reference	A3452230WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	590 Lm
Power	5,5 W
Power values of the system	6,71 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	38°
Lighting efficiency	80%
Efficacy	107 Lm/W
Current intensity	500 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	290 g.
Packaged weight	365 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

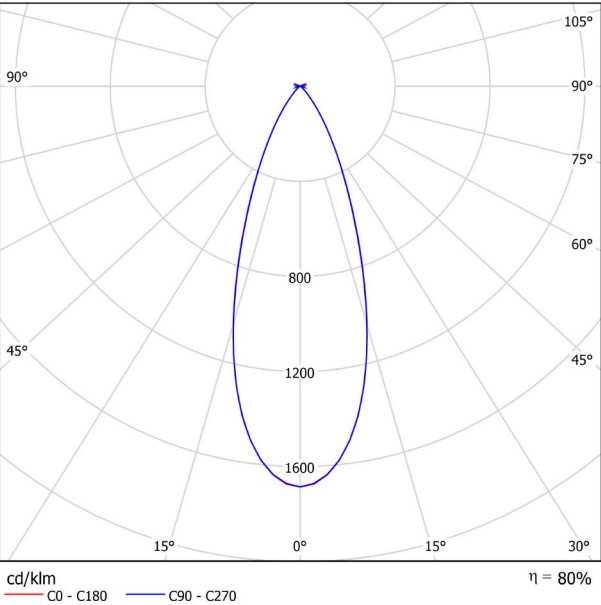

CONICAL DIAGRAM

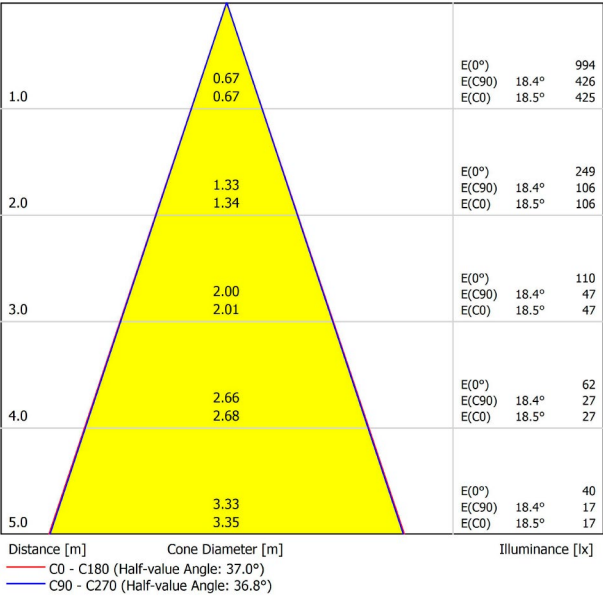




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED DIM DALI 38° 3000K NT
Reference	A3452231NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	5,5 W
Power values of the system	6,71 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	38°
Lighting efficiency	80%
Efficacy	115 Lm/W
Current intensity	500 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	290 g.
Packaged weight	365 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

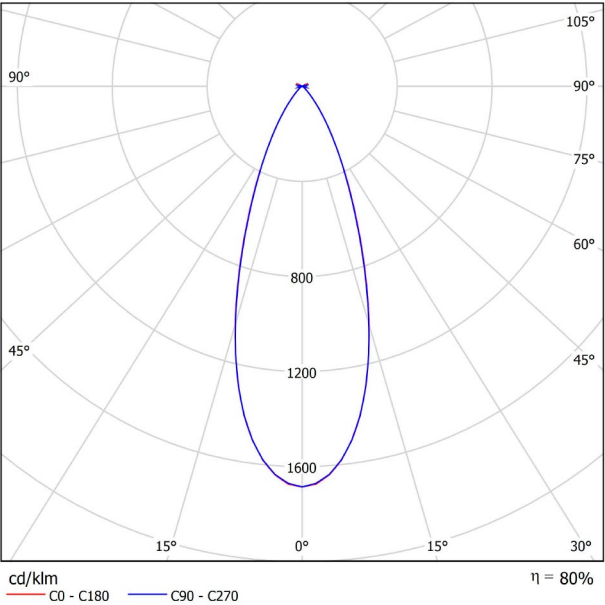

CONICAL DIAGRAM

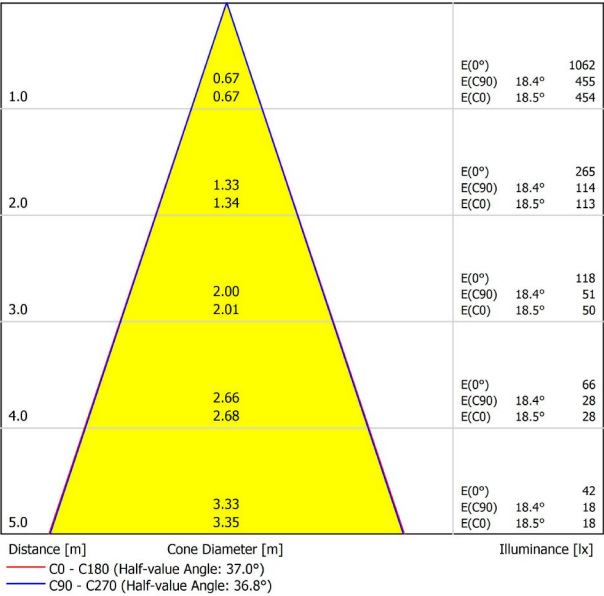




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED DIM DALI 38° 3000K WT
Reference	A3452231WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	5,5 W
Power values of the system	6,71 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	38°
Lighting efficiency	80%
Efficacy	115 Lm/W
Current intensity	500 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	290 g.
Packaged weight	365 g.
Packaging dimensions	179 x 147 x 71 mm.
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

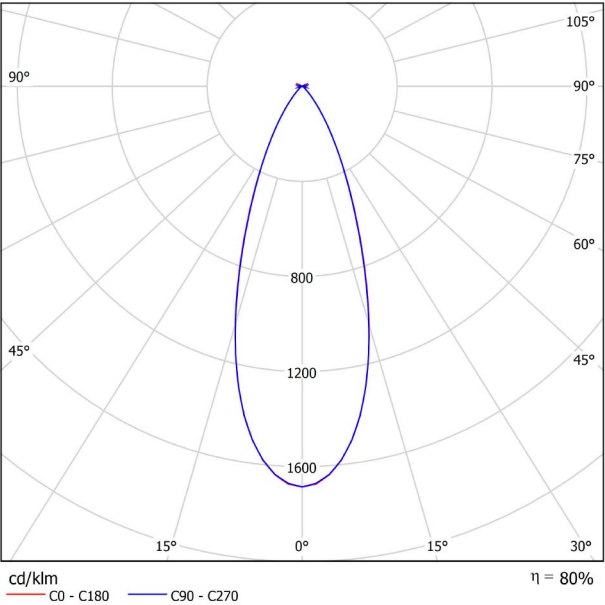

CONICAL DIAGRAM

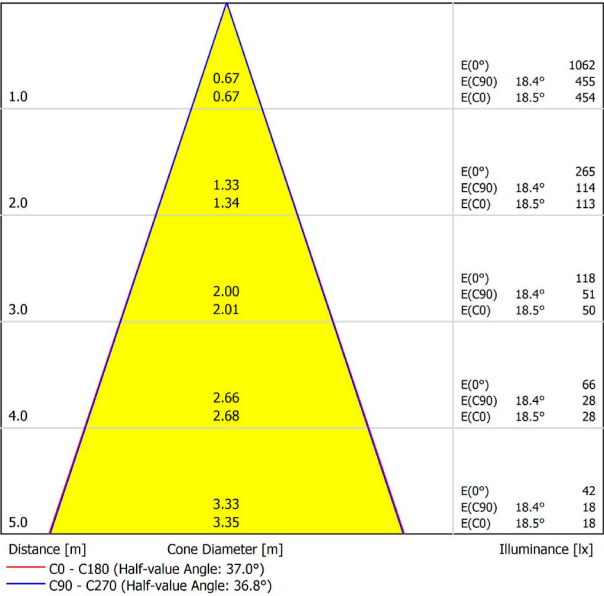




PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories
NOT SOLD SEPARATELY.	



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED 38° 3000K G
Reference	A3452131G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	5,5 W
Power values of the system	6,18 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	38°
Lighting efficiency	80%
Efficacy	115 Lm/W
Current intensity	500 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	240 g.
Packaged weight	315 g.
Packaging dimensions	179 x 147 x 71 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

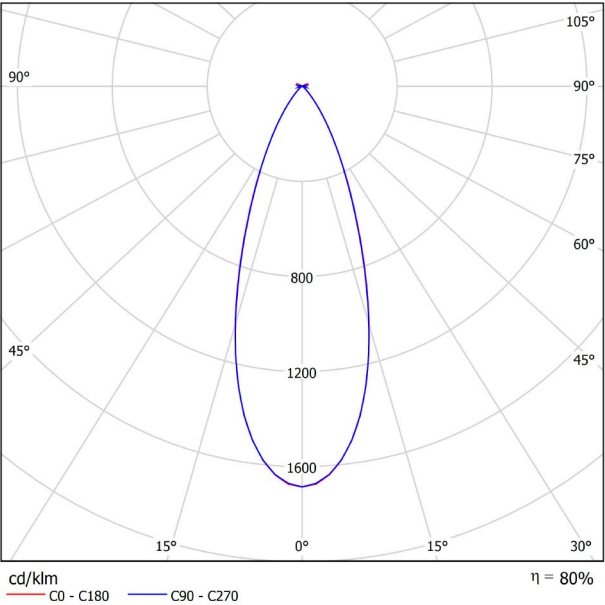

CONICAL DIAGRAM

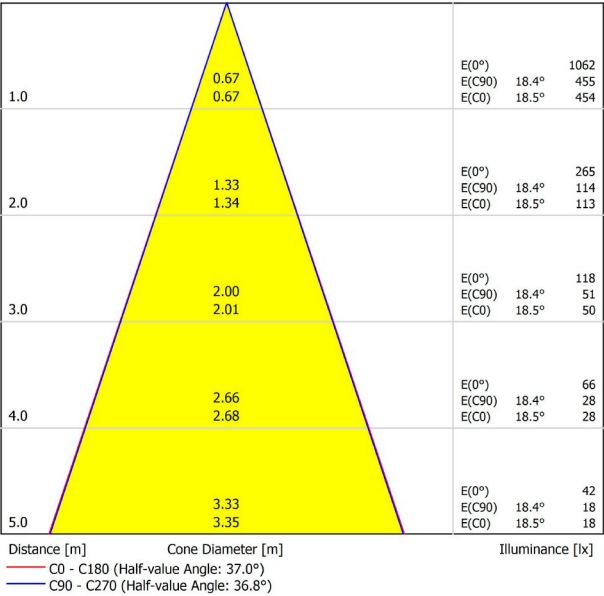



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED DIM DALI 19° 2700K G
Reference	A3452210G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	590 Lm
Power	5,5 W
Power values of the system	6,71 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	19°
Lighting efficiency	82%
Efficacy	107 Lm/W
Current intensity	500 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	290 g.
Packaged weight	365 g.
Packaging dimensions	179 x 147 x 71 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

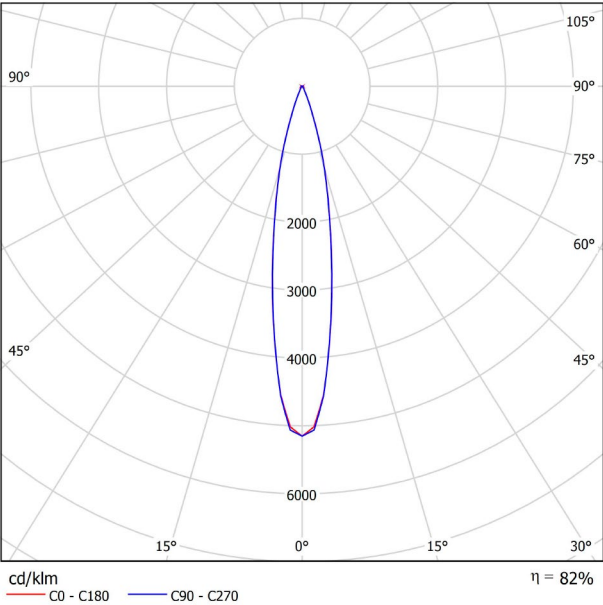

CONICAL DIAGRAM

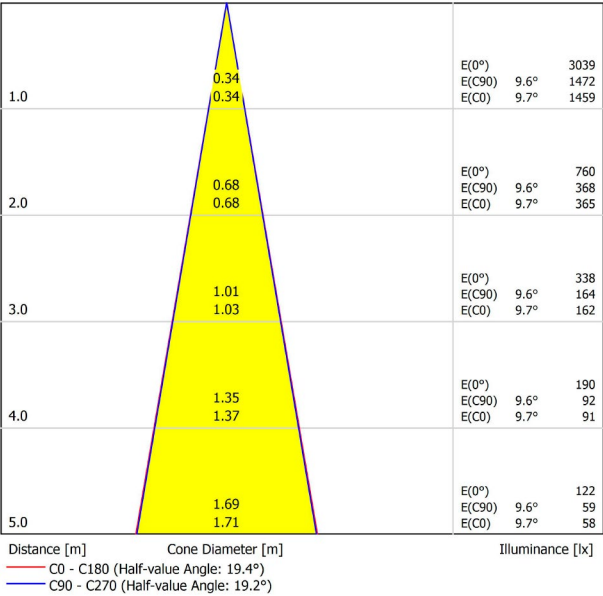



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED DIM DALI 19° 3000K G
Reference	A3452211G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	5,5 W
Power values of the system	6,71 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	19°
Lighting efficiency	82%
Efficacy	115 Lm/W
Current intensity	500 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	290 g.
Packaged weight	365 g.
Packaging dimensions	179 x 147 x 71 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

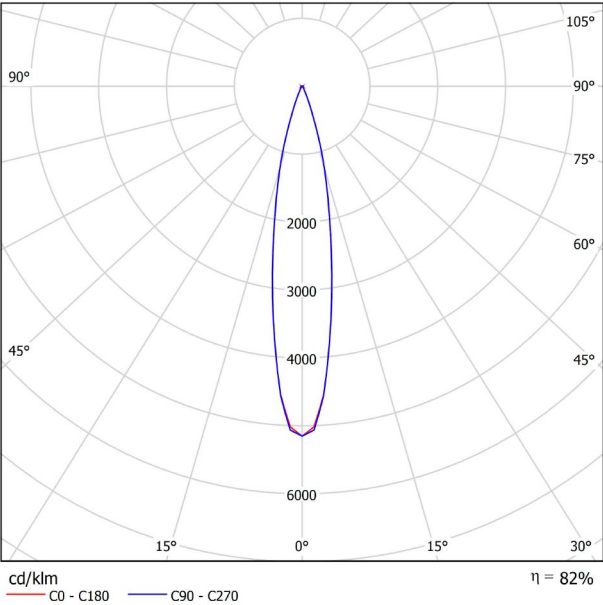

CONICAL DIAGRAM

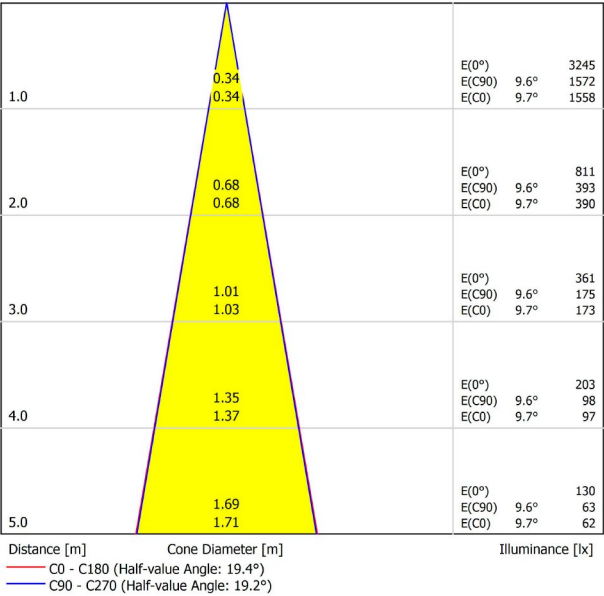



PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED DIM DALI 29° 2700K G
Reference	A3452220G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	590 Lm
Power	5,5 W
Power values of the system	6,71 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	29°
Lighting efficiency	80%
Efficacy	107 Lm/W
Current intensity	500 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	290 g.
Packaged weight	365 g.
Packaging dimensions	179 x 147 x 71 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

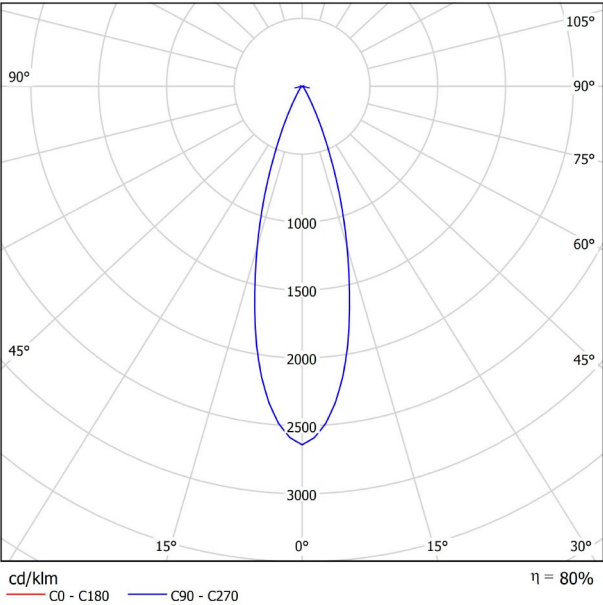

CONICAL DIAGRAM

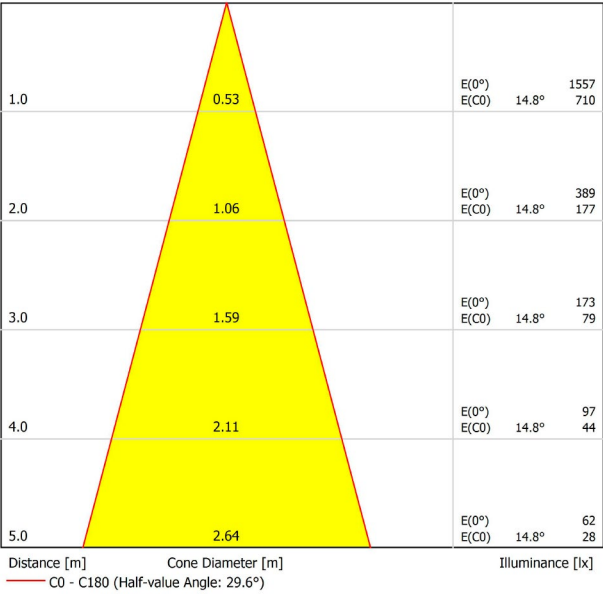



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED DIM DALI 29° 3000K G
Reference	A3452221G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	5,5 W
Power values of the system	6,71 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	29°
Lighting efficiency	80%
Efficacy	115 Lm/W
Current intensity	500 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	290 g.
Packaged weight	365 g.
Packaging dimensions	179 x 147 x 71 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

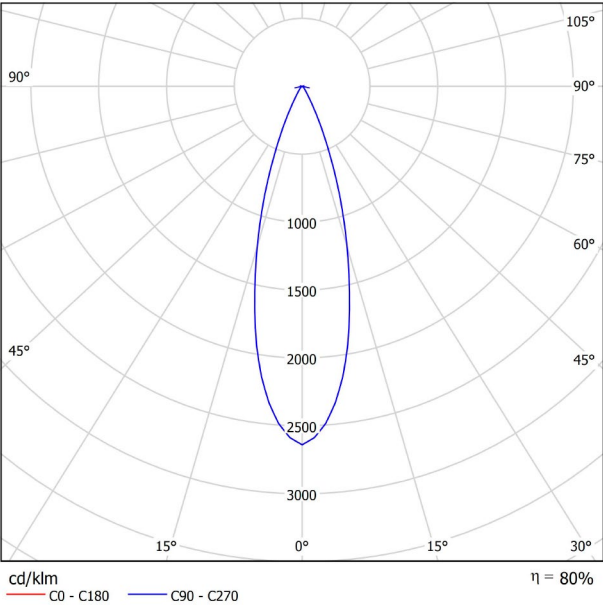

CONICAL DIAGRAM

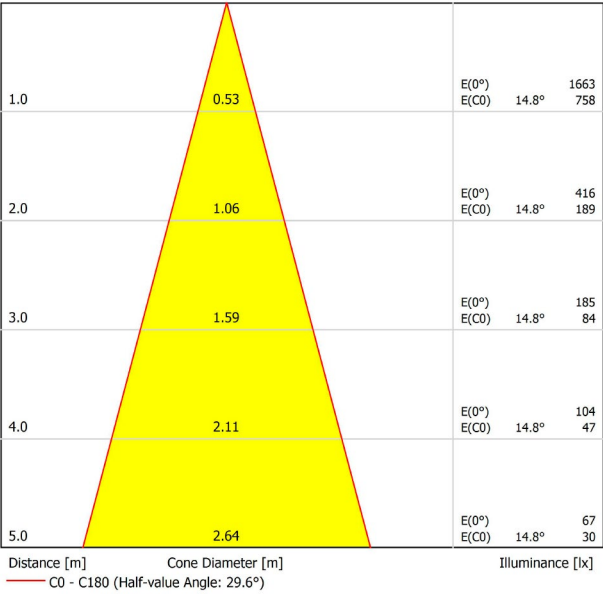



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED DIM DALI 38° 2700K G
Reference	A3452230G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	590 Lm
Power	5,5 W
Power values of the system	6,71 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	38°
Lighting efficiency	80%
Efficacy	107 Lm/W
Current intensity	500 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	290 g.
Packaged weight	365 g.
Packaging dimensions	179 x 147 x 71 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

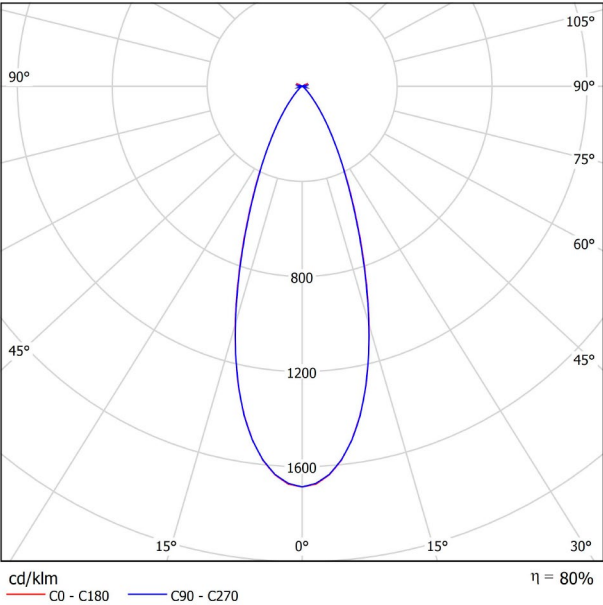

CONICAL DIAGRAM

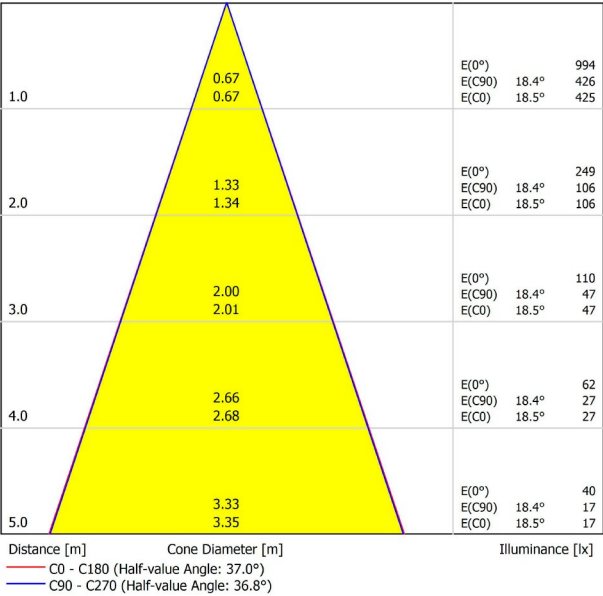



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED DIM DALI 38° 3000K G
Reference	A3452231G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	5,5 W
Power values of the system	6,71 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	38°
Lighting efficiency	80%
Efficacy	115 Lm/W
Current intensity	500 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	290 g.
Packaged weight	365 g.
Packaging dimensions	179 x 147 x 71 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

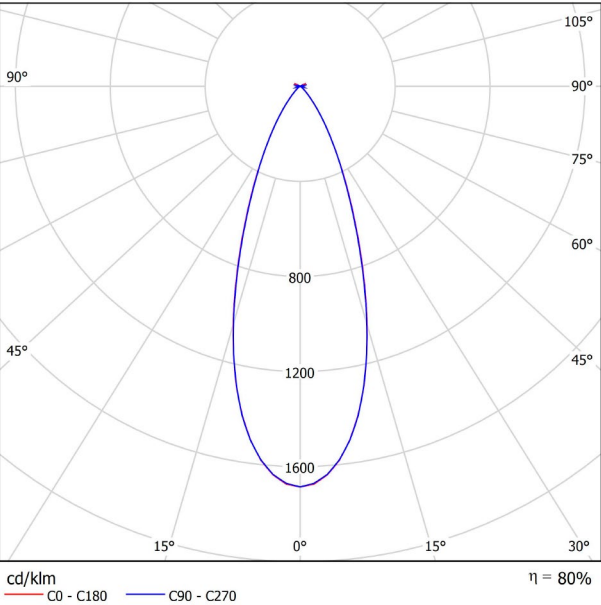

CONICAL DIAGRAM

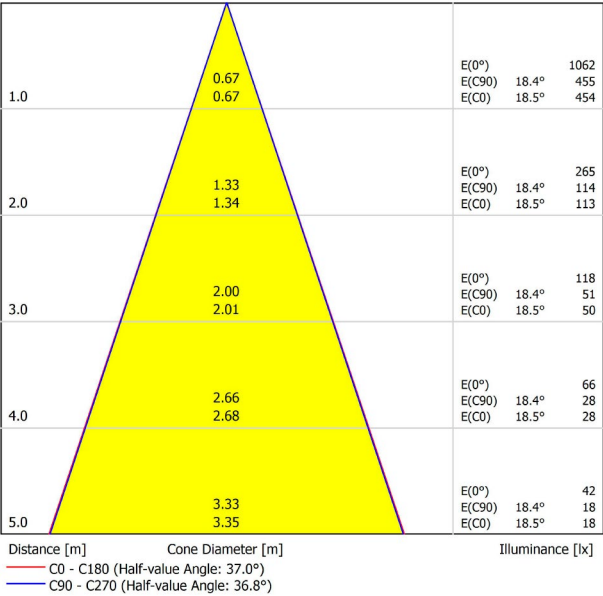



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED 19° 2700K G
Reference	A3452110G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	590 Lm
Power	5,5 W
Power values of the system	6,18 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	19°
Lighting efficiency	82%
Efficacy	107 Lm/W
Current intensity	500 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	240 g.
Packaged weight	315 g.
Packaging dimensions	179 x 147 x 71 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

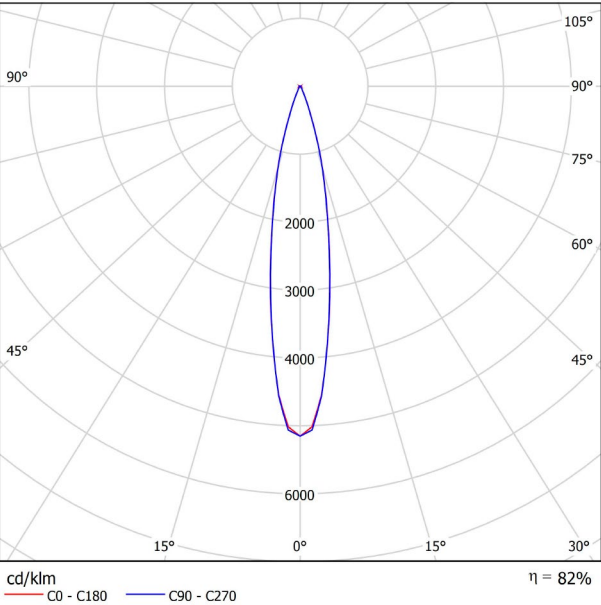

CONICAL DIAGRAM

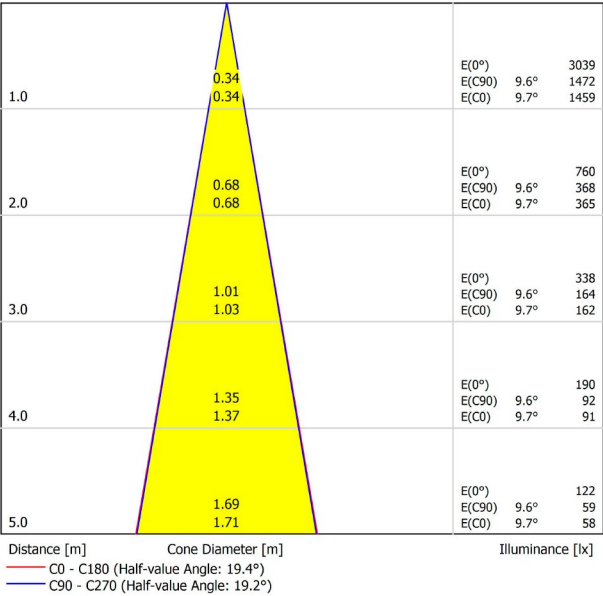



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES

ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	FIT 35 RECESSED 19° 3000K G
Reference	A3452111G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	5,5 W
Power values of the system	6,18 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	19°
Lighting efficiency	82%
Efficacy	115 Lm/W
Current intensity	500 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	240 g.
Packaged weight	315 g.
Packaging dimensions	179 x 147 x 71 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

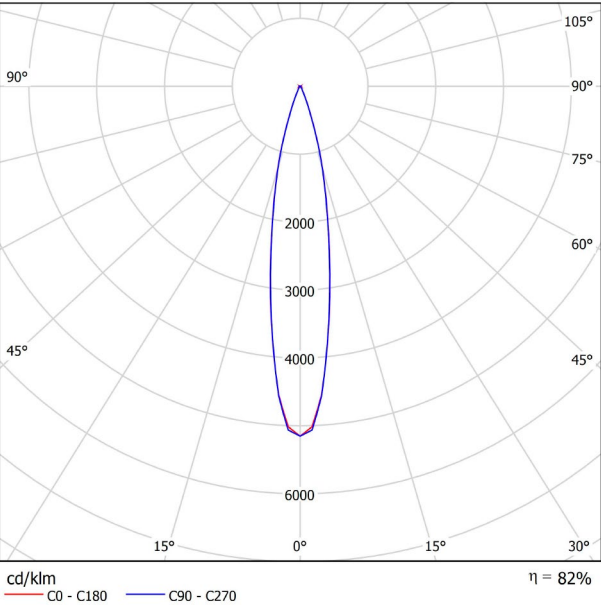

CONICAL DIAGRAM

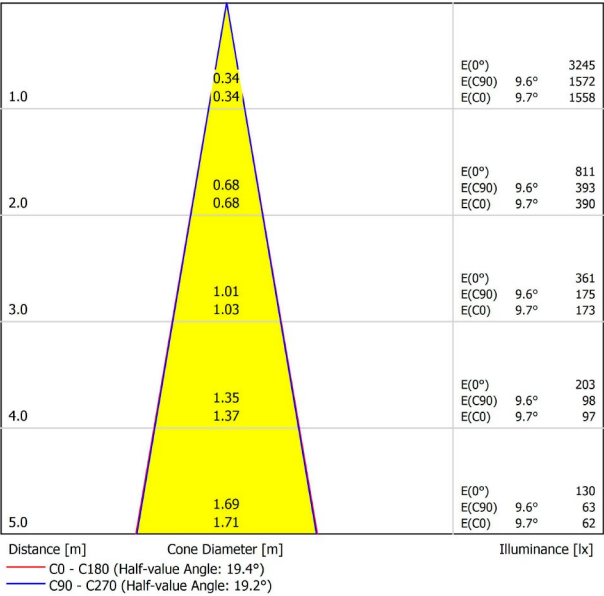



PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB
LOUVER

PRODUCT

Name	FIT 35 RECESSED 29° 2700K G
Reference	A3452120G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	590 Lm
Power	5,5 W
Power values of the system	6,18 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	29°
Lighting efficiency	80%
Efficacy	107 Lm/W
Current intensity	500 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	240 g.
Packaged weight	315 g.
Packaging dimensions	179 x 147 x 71 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

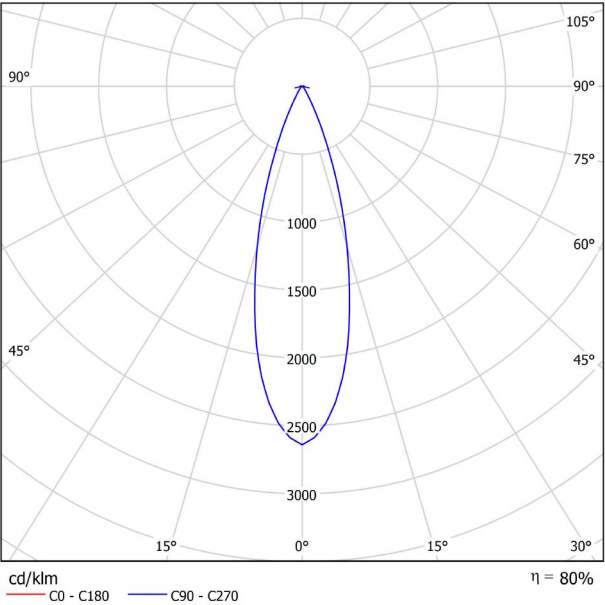

CONICAL DIAGRAM

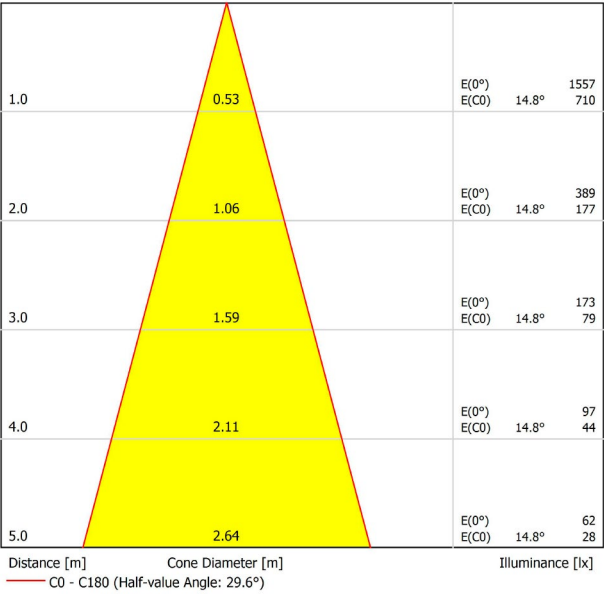



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED 29° 3000K G
Reference	A3452121G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	630 Lm
Power	5,5 W
Power values of the system	6,18 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	29°
Lighting efficiency	80%
Efficacy	115 Lm/W
Current intensity	500 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	240 g.
Packaged weight	315 g.
Packaging dimensions	179 x 147 x 71 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

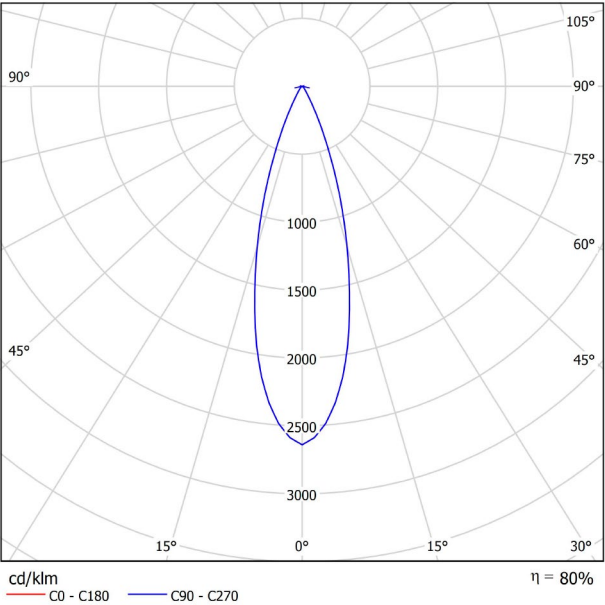

CONICAL DIAGRAM

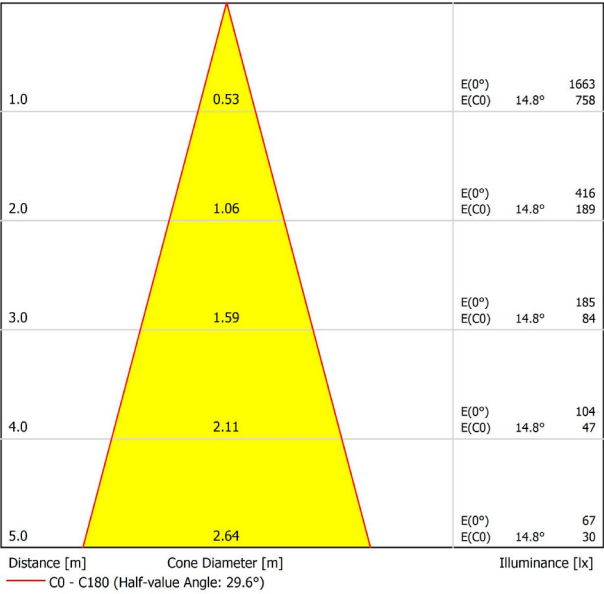



PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories


NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.



DIMENSIONS



ACCESSORIES



ANTI-GLARE HONEYCOMB LOUVER

PRODUCT

Name	FIT 35 RECESSED 38° 2700K G
Reference	A3452130G
Color	Gold
RAL	Paint of metallic nanoparticles
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	590 Lm
Power	5,5 W
Power values of the system	6,18 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	38°
Lighting efficiency	80%
Efficacy	107 Lm/W
Current intensity	500 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	☐
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø50 mm.
Swivel angle	90°
Rotation angle	350°
Weight	240 g.
Packaged weight	315 g.
Packaging dimensions	179 x 147 x 71 mm
Units per package	1
Materials	Aluminium / Polycarbonate





Fit Recessed, is a spotlight for single recessed lighting solutions available in two sizes (Ø50 and Ø35). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be oriented in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

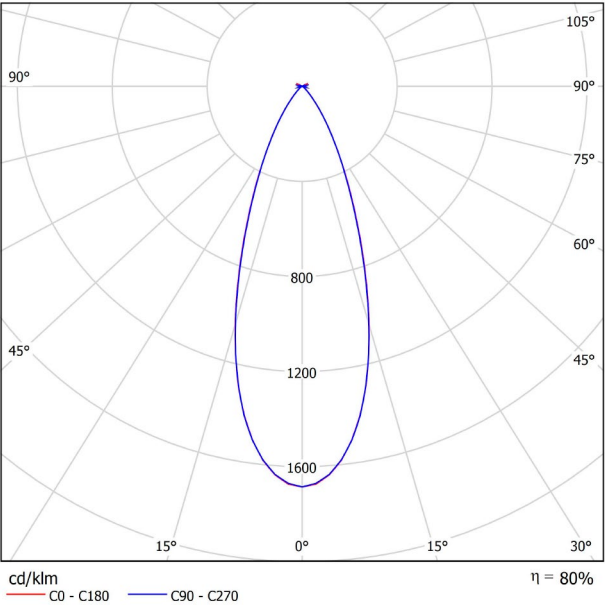

CONICAL DIAGRAM

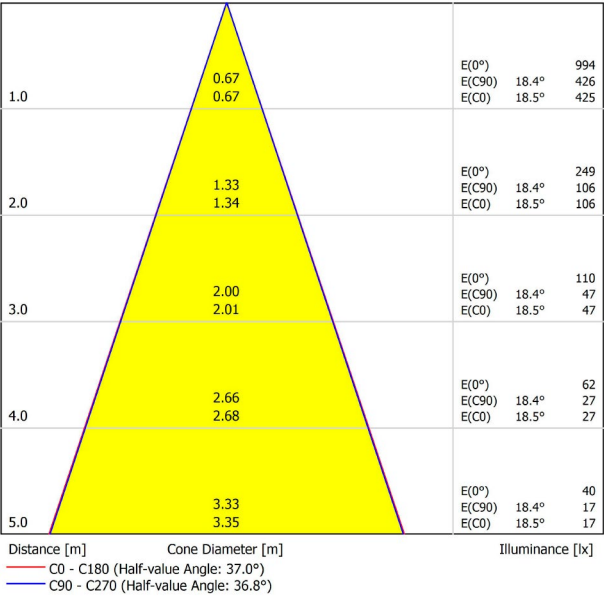



	PRODUCT
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories

NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.